



P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	120CT2023	AD	CW

NOTES:

1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: POLYMER
RATED VOLTAGE: 30V(AC/DC)
RATED CURRENT: 1.2A
RATED IMPULSE VOLTAGE: 0.8kV
POLLUTION DEGREE: 3
MATING CYCLES: 500 CYCLES
CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T2400011002X000)
3. ALL THE PARTS PACKAGED IN A PE BAG AS SIGNAL ITEM.


注释:

1. 技术参数:
绝缘材料: 聚合物
额定电压: 30V(AC/DC)
额定电流: 1.2A
额定脉冲电压: 0.8kV
污染等级: 3
插拔次数: 500次
接线类型: 冷压接
2. 端子需要单独订购。
(订货号参考图面: T2400011002000)
3. 所有的零件以散件的形式包装在PE袋中。

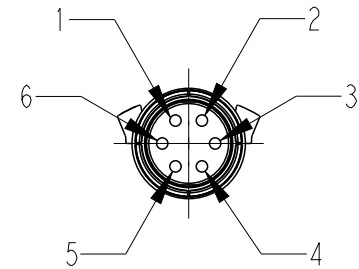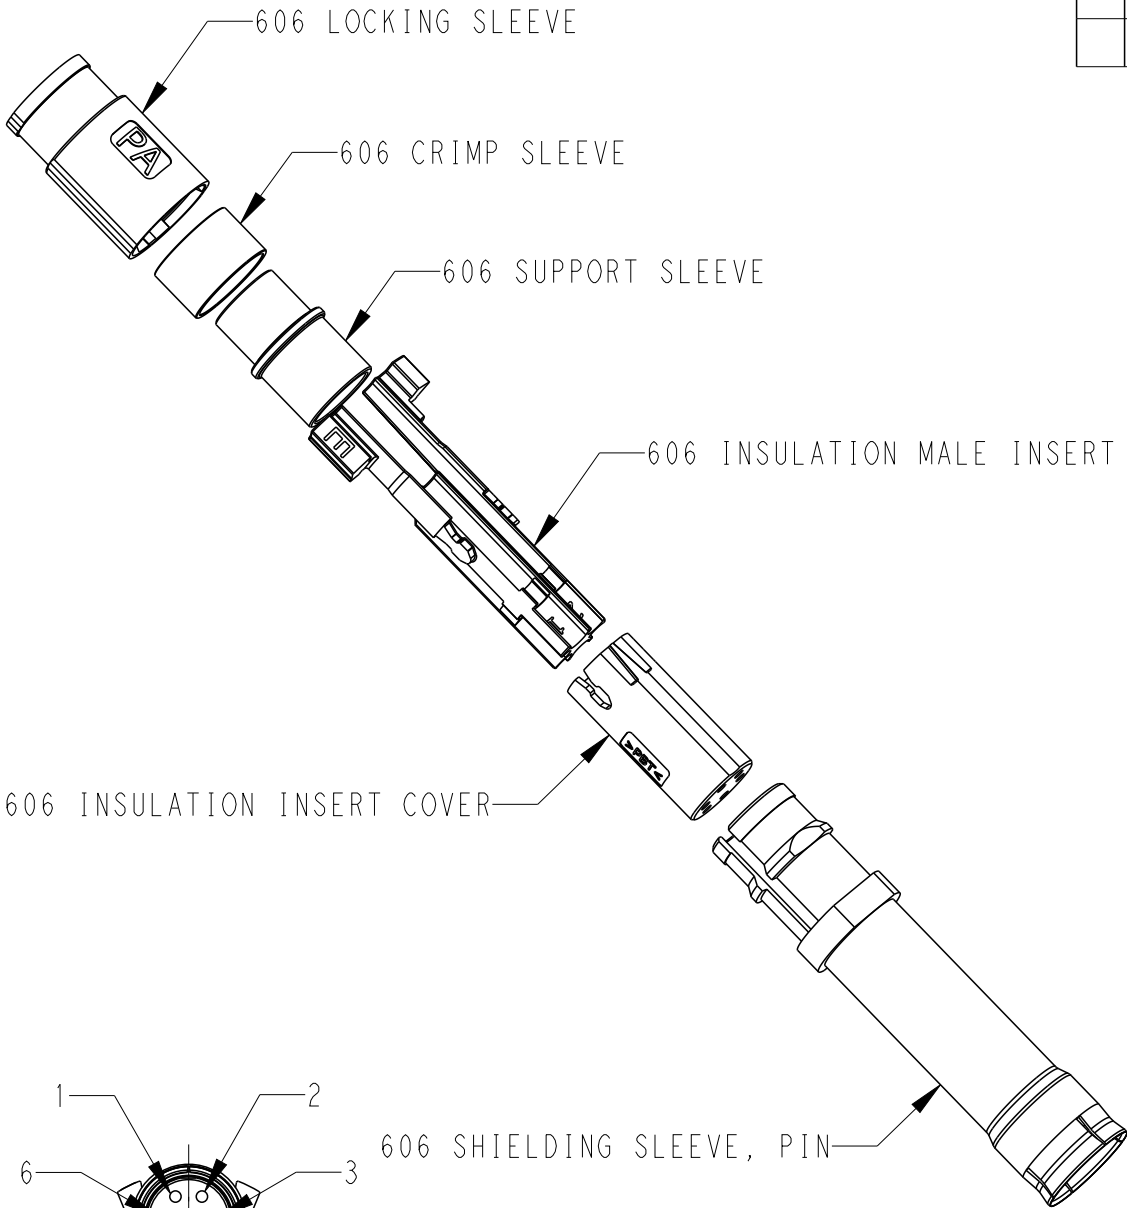

MATING VIEW - CONTACT OUTLET

TT2080142101-100	606E-C5-6P-E	606 ETHERNET ELEMENT CAT5, 6 PIN, E-TYPE 606以太网组件, 5类, 6PIN, E型
PART NUMBER 料 号	PART DESCRIPTION 描 述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 120CT2023 Alan Dong	 TE Connectivity		
		CHK 120CT2023 Gino Yao			
DIMENSIONS: mm		APVD 120CT2023 Chris Wang	NAME 606 ETHERNET ELEMENT CAT5, 6 PIN, E-TYPE		
		PRODUCT SPEC 108-137683	SIZE A3		
		APPLICATION SPEC 114-137683			
MATERIAL -		WEIGHT 4.0 G	CAGE CODE 00779	DRAWING NO T2080142101100	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 OF 1	REV A

SECTION A-A

