

Removal tools Application Specification

REMOV-5A-M

1. Application scope and characteristics

This removal tool is designed for removing 5A contacts (CAM/CAF/DAM/DAF) from inserts.

Applicable inserts: HMNK which use 5A contacts

Order No.: T3100000017-000



2. Working principle


Inserting contacts: Small size cables always have not strength enough to push contacts into inserts. So, an assist tool is needed. REMOVE-5A-M uses the metal part to push contacts into inserts.

Remove contact: REMOV-5A-M removal tool uses the metal tip as a key to release contacts holding device in inserts to remove the contacts from inserts.

3. Application graphic instructions

3.1. Inserting contacts

- Using the top of metal part (red side) of REMOV-5A-M to push contacts into inserts.
- Contacts will stop move when in the correct position.

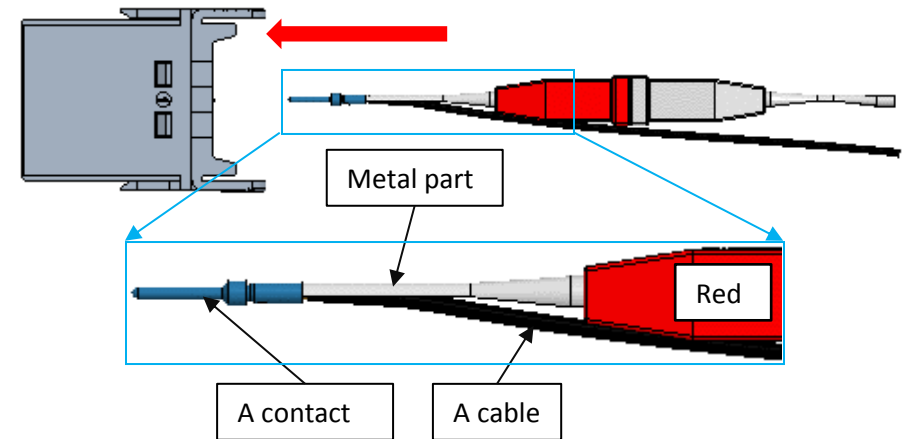

3.2. Remove contacts

- Insert the tool along the crimped contact into the insert hole till it touch the contact end face. Make sure the tool in the correct position.
- Hold the cable and the tool together. Then, pull out the contact.

