
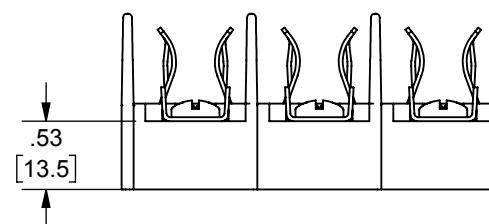
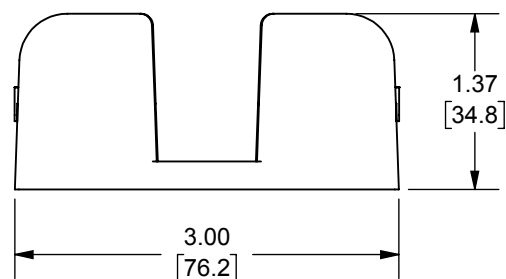


REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
-	1/14/20	N/A	REDRAWN	GDR	N/A	N/A

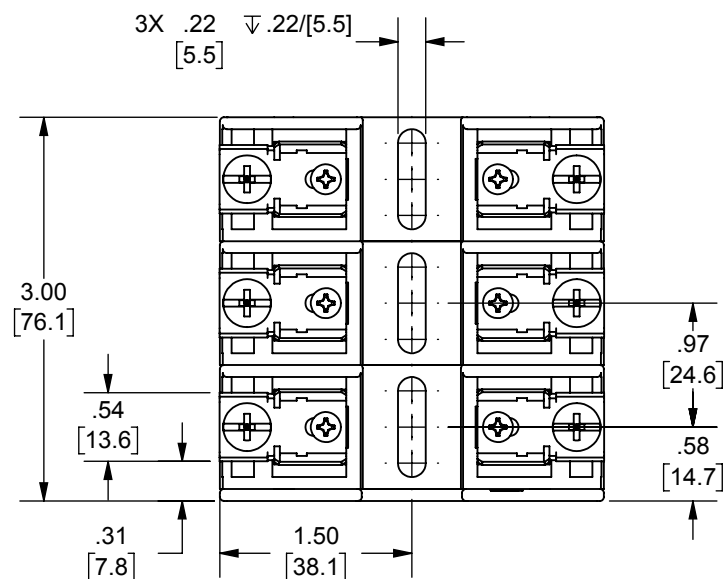

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL COMPOSITION AND RATING:
POLYCARBONATE-125°C RTI.
OMIT SPRING AND REJECTION.
- OMIT REJECTION.

P/N 20313
P/N 20318 SPRF
P/N 20318R SPRF

P/N	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		U/L		CSA
				C°	TYPE	FILE NO.	GUIDE NO.	REPORT NO.
20313 2	H, K	10K	20	60/75	CU ONLY	E52283	IZLT	LR32169
20318 3	H, K	10K	20	60/75	CU ONLY			
20318R	R	200K	20	60/75	CU ONLY			

DIMENSIONS IN [] ARE MILLIMETERS

mercen

MERSEN USA NEWBURYPORT-MA, LLC
374 MERRIMAC STREET
NEWBURYPORT, MA 01950

PRODUCT MANAGER

SIGN: D.VANGARI

DATE: 1/28/2020

DESIGN ENGINEER

SIGN: M.RADZIM

DATE: 1/28/2020

20313, 20318 (SPRF), 20318R (SPRF)

FUSE BLOCK, 3P SCREW CONNECTOR

30A 250V

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

05B0331

SHEET 1 OF 1