

ABAT12E 1200VDC max

DC PROTECTION FUSES

SQUARE BODY HIGH SPEED FUSE LINKS DC PROTECTION



Mersen DC offers provide a very high performant protection for DC applications in particular battery container or inverter protection.

ABAT12E fuses have been designed for 1200VDC applications, with current ratings from 800A to 1800A.

ABAT12E fuses allow them to clear high Max. Interrupting Rating and provide a limited power loss.

This range is UL recognized.

TECHNICAL DATA OVERVIEW

Rated DC Voltage UN	1200 VDC (L/R≤3ms)
Ampere Range (A)	800 ... 1800 A
Speed/Characteristic	aBat
I.R (DC) @1200VDC, L/R≤3ms	130kA

FEATURES & BENEFITS

- Designed for DC applications
- Dedicated to battery protection
- High Max. Interrupting Rating

APPLICATIONS

- Protection of inverters
- Battery container protection
- Battery rack / string protection
- Power Conversion System (PCS) protection
- Protection of Battery Connection Panel (BCP)
- DC Systems protection

STANDARDS

- UL Recognized - UL 248-13
- CSA C22.2



ABAT12E 1200VDC max

PRODUCT RANGE




ABAT12E800-BIA

ABAT12E with Flush ends TTQF

Catalog number	Item number	Rated DC voltage	Rated current I_n	Pre-arcing I^2t	Clearing I^2t at Rated Voltage	Max. Interrupting Rating IR @1200VDC, L/R=3ms	Watt Loss @ 0,8 I_n
ABAT12E800-BIA	P1202982	1200 V	800 A	121 kA ² s	340 kA ² s	130 kA	138 W
ABAT12E1000-BIA	Q1202983	1200 V	1000 A	231 kA ² s	720 kA ² s	130 kA	143 W
ABAT12E1200-BIA	R1202984	1200 V	1200 A	532 kA ² s	1650 kA ² s	130 kA	149 W
ABAT12E1400-BIA	S1202985	1200 V	1400 A	800 kA ² s	2485 kA ² s	130 kA	154 W
ABAT12E1500-BIA	S1203008	1200 V	1500 A	988 kA ² s	2970 kA ² s	130 kA	156 W
ABAT12E1700-BIA	T1203009	1200 V	1700 A	1403 kA ² s	4225 kA ² s	130 kA	162 W
ABAT12E1800-BIA	V1202987	1200 V	1800 A	1868 kA ² s	5625 kA ² s	130 kA	164 W


TIME CURRENT CHARACTERISTIC CURVES

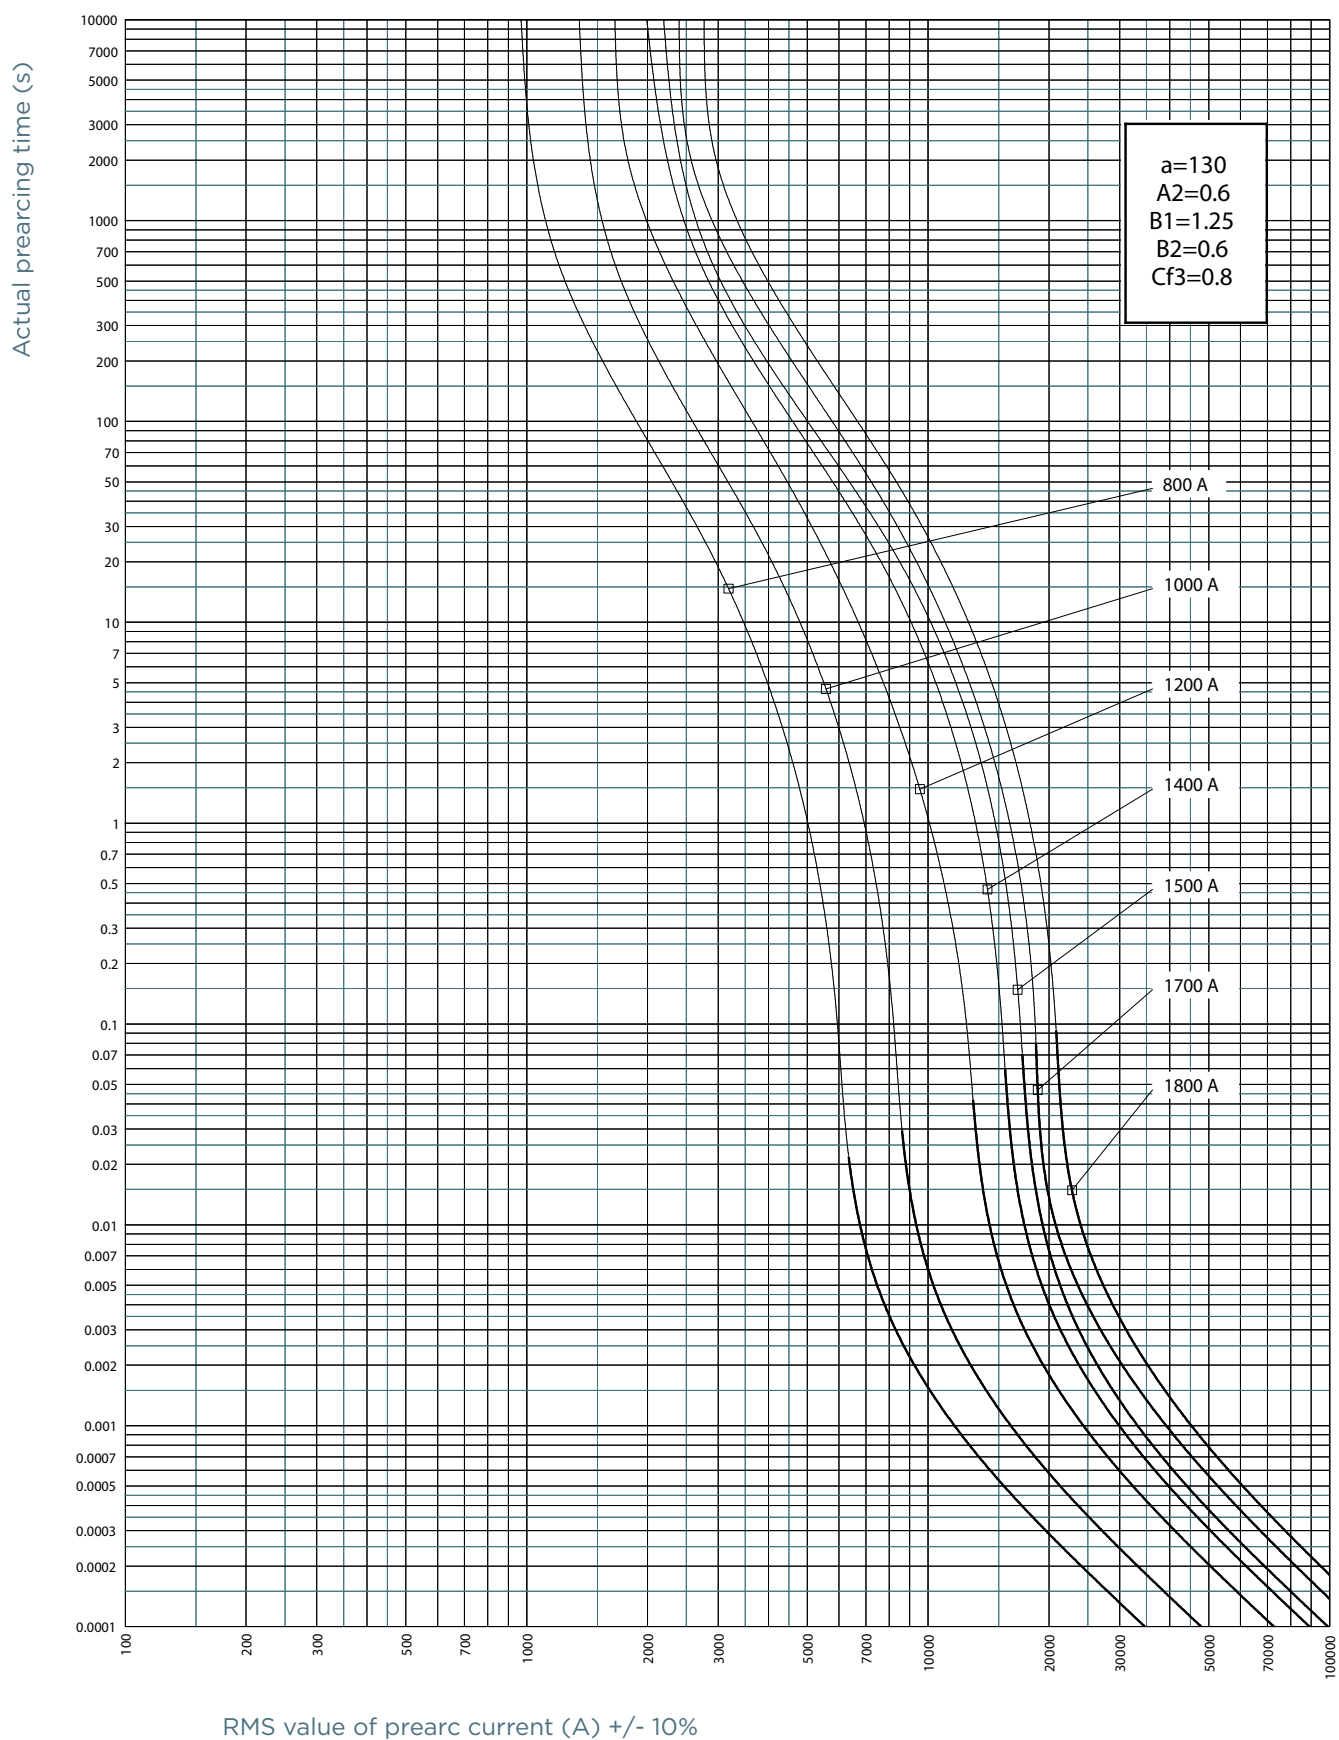

ABAT12E 1200VDC max

DIMENSIONS

ABAT12E - with flush ends TTF

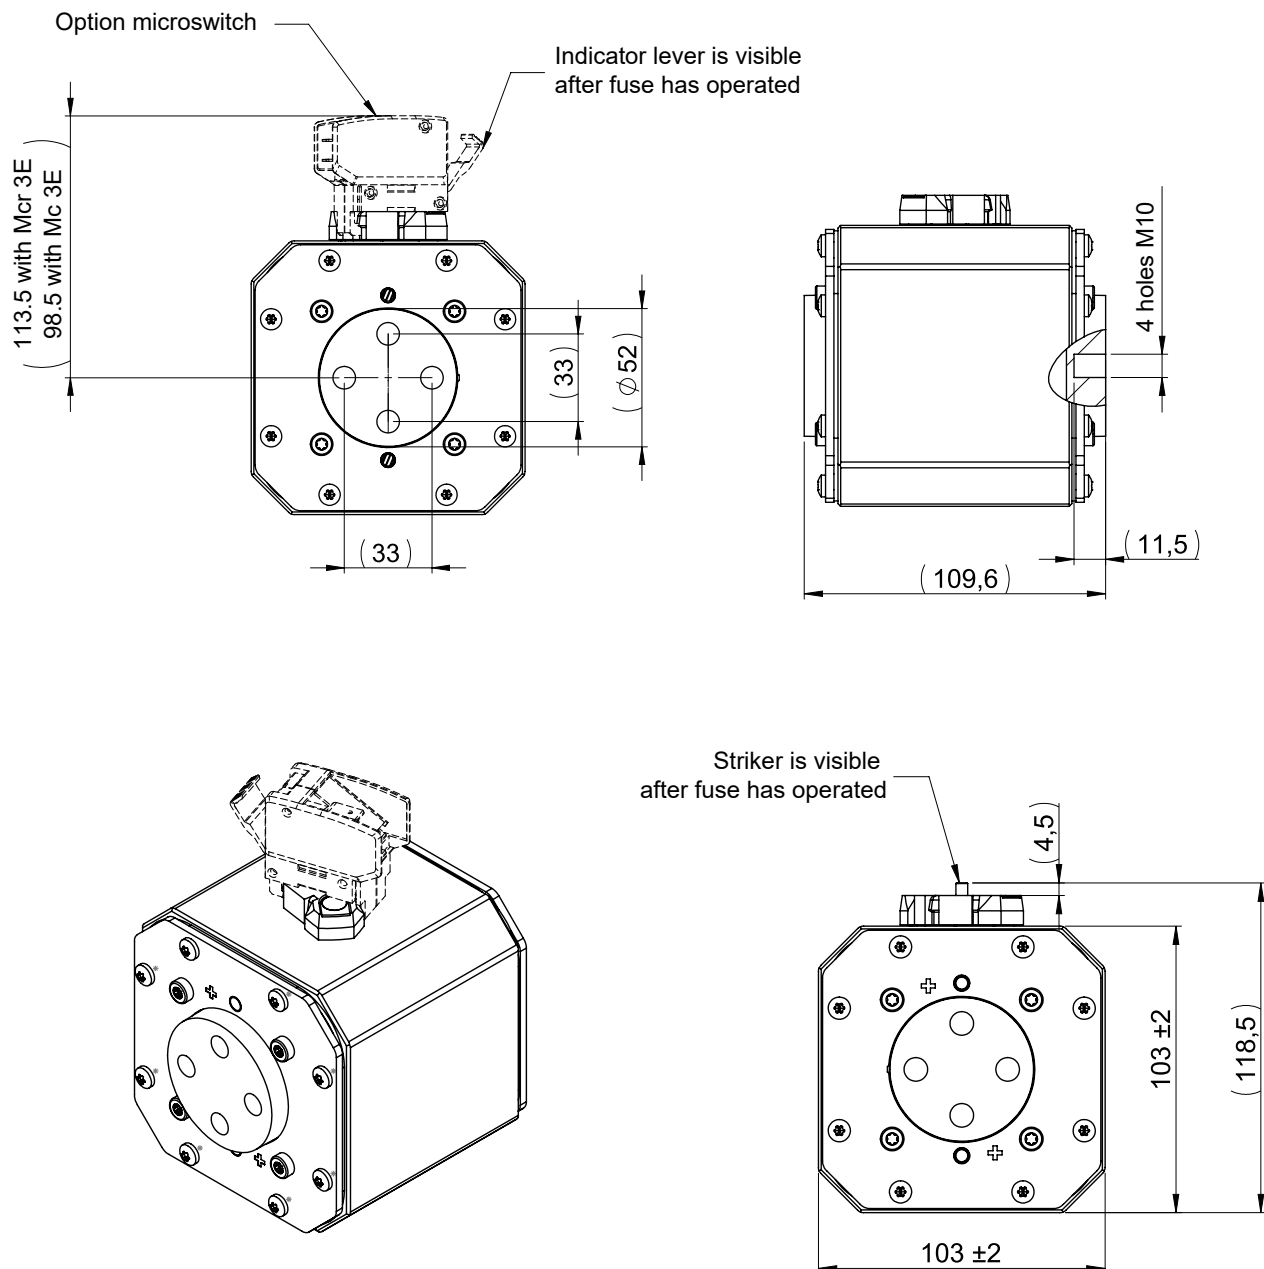

Dimensions in mm