
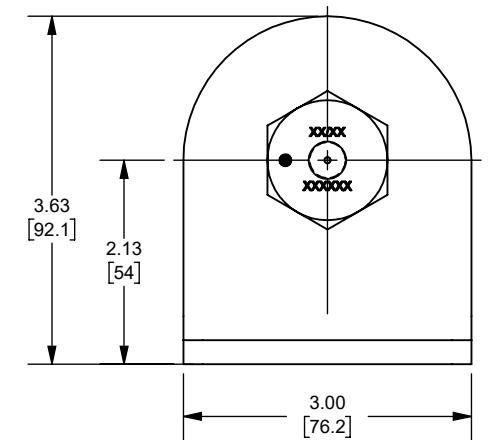
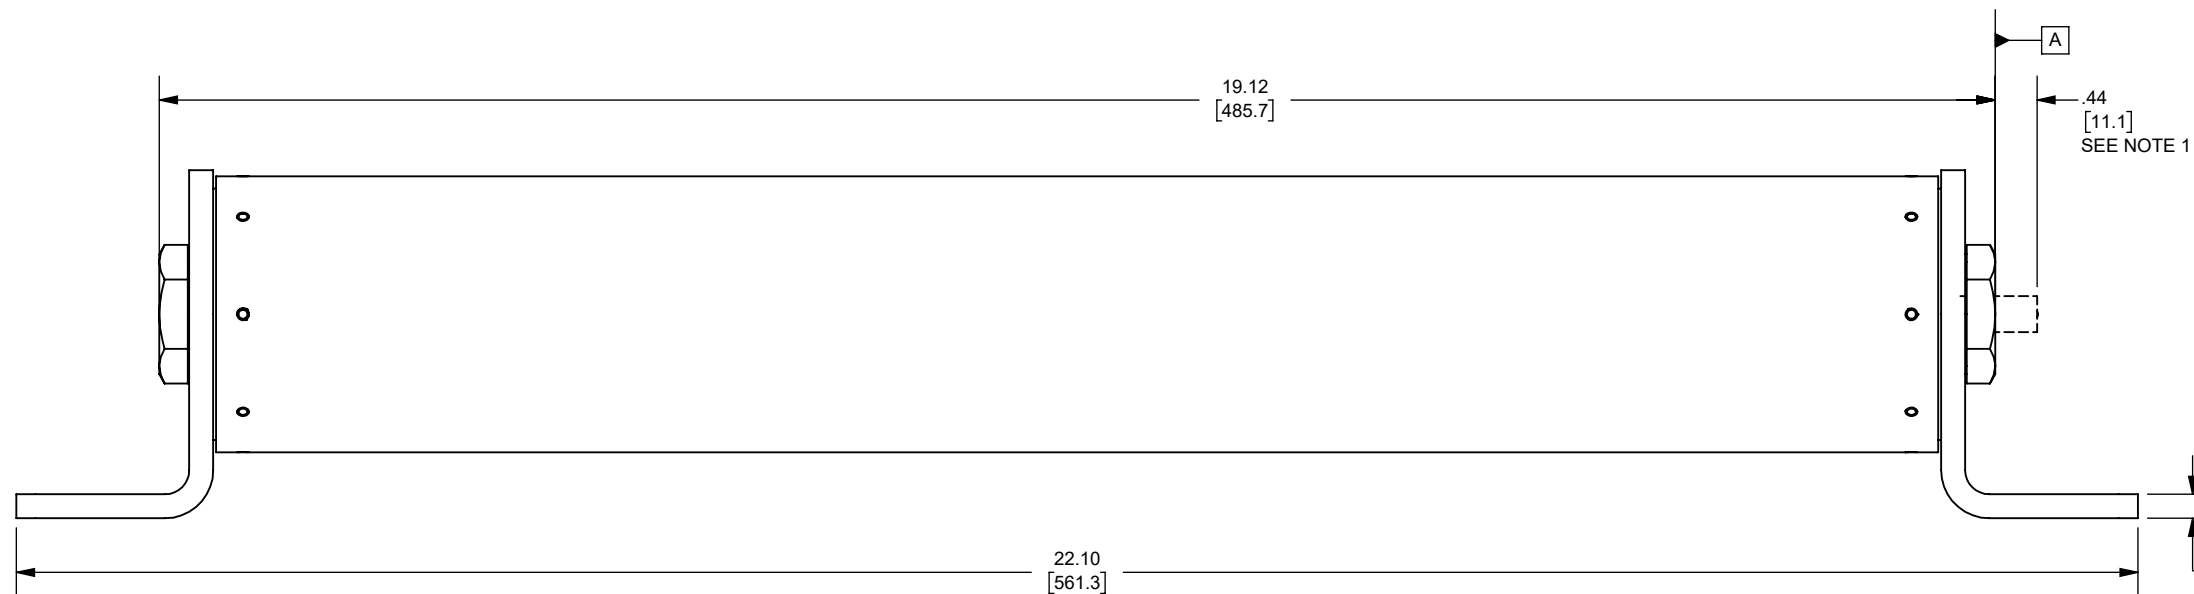
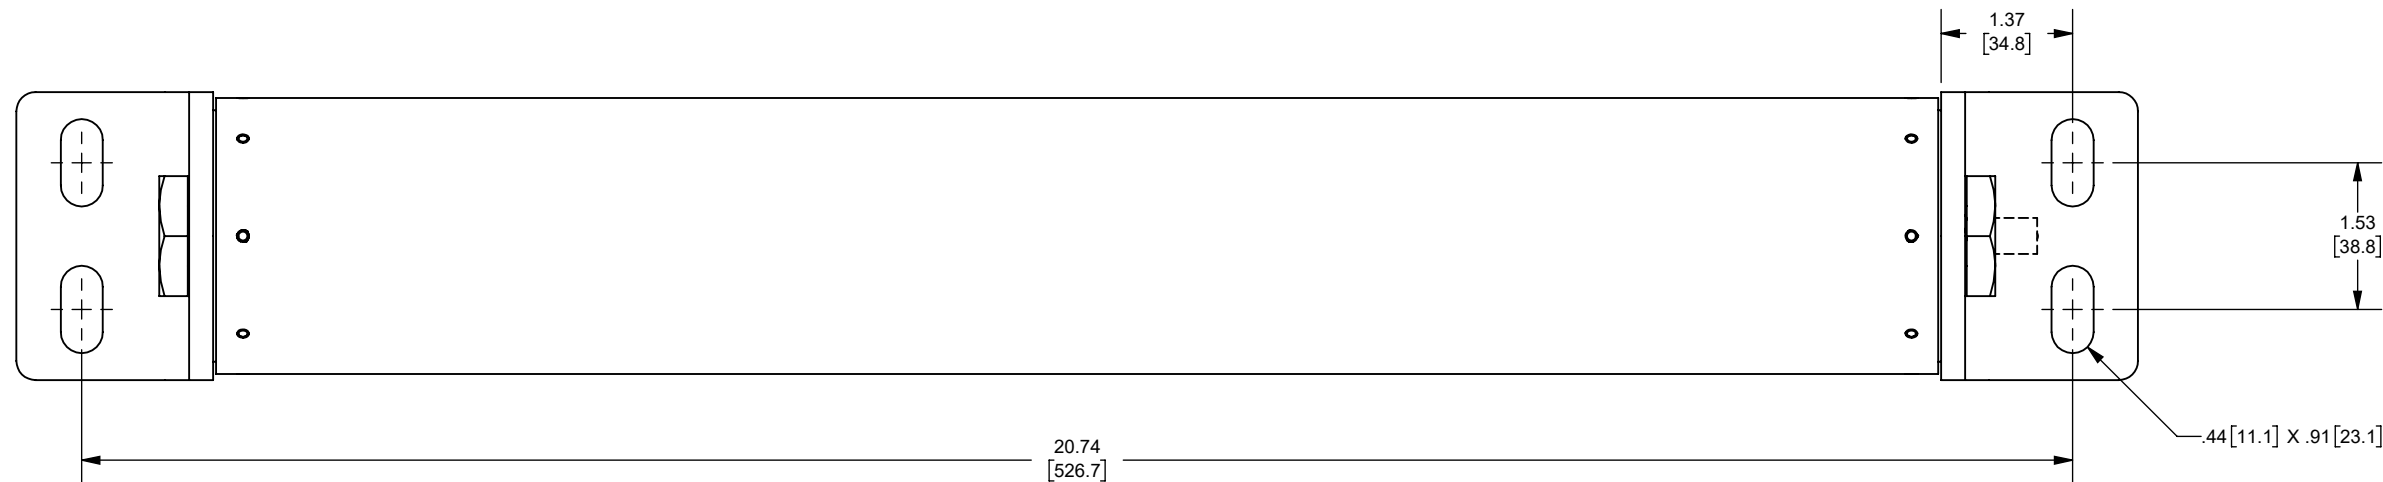


1. INDICATOR IS FLUSH WITH SURFACE **A** BEFORE FUSE OPENS
INDICATOR EXTENDS .44 IN. [11.2mm] AFTER FUSE OPENS AND EXERTS
1 LBF AT THE END OF TRAVEL

REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
A	4/27/2022	16903	INITIAL RELEASE	KMH	N/A	SEE ECO



OUTLINE DIMENSIONS NOT TO BE USED FOR PRODUCTION	DIMENSIONS IN [] ARE MILLIMETERS
---	--

Approval stage / Etat d'approbation:		Product Class:/ Product Type:		E-RATED BOLT-IN		AMP-TRAP	
APPROUVÉ POUR FABRICATION / APPROVED FOR MANUFACTURING		Product amp rating:/ Voltage rating:		30E - 50E		15.5kV	
Initial ECO / ECO intiale:		ECO-16903-000		Title / Titre: A155B1D0R0-(30E - 50E)			Weight : Masse : 4912
Draw by / Dessiné par: Alma Balcazar		Date : 9/7/2022		MEDIUM VOLTAGE			
Checked by / Vérifié par: Yadyra Fang		Date : 9/7/2022		Drawing / de dessin: OUT-1202799			Rev : Rév : A
Electrical Power 374 MERRIMAC STREET NEWBURYPORT,MA 01950		Éch / Scale : 1:2 Format / Size : B		Part / Article: SEE TABLE		Page : 1/1	MERSEN
Ce plan strictement confidentiel est la propriété exclusive de la société MERSEN sans l'autorisation écrite de laquelle il ne peut être ni reproduit, ni copié, ni communiqué à des tiers. This drawing and specifications there on is property of MERSEN and shall not be reproduced or copied or used in whole or in part as the base for manufacture or sale of item without written permission.							