
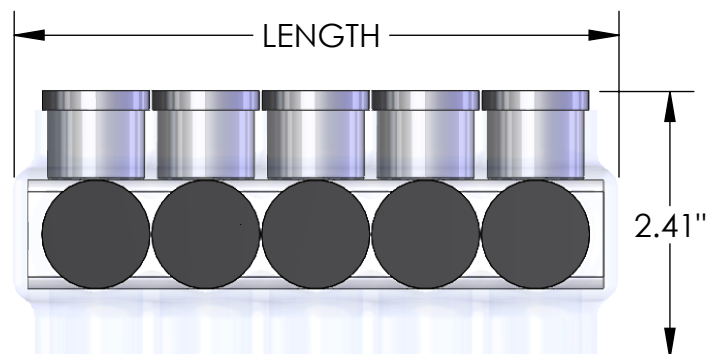


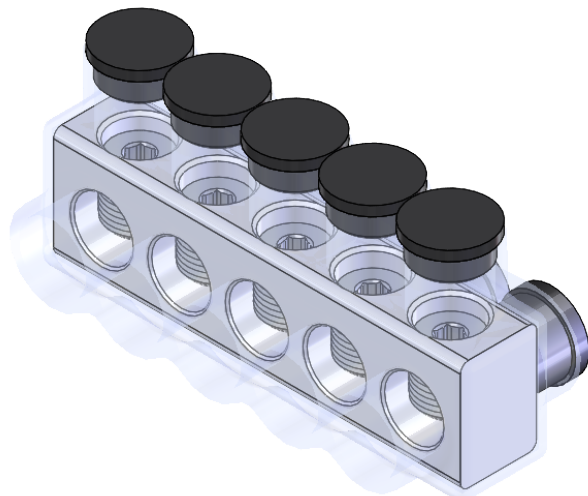


SET SCREW
PLUG SP350


CABLE ENTRY
PLUG CP350

IPLD350-5C SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
IPLD350-3C	3	3.52
IPLD350-4C	4	4.57
IPLD350-5C	5	5.62
IPLD350-6C	6	6.67
IPLD350-8C	8	8.77
IPLD350-10C	10	10.87
IPLD350-11C	11	11.92
IPLD350-12C	12	12.97
IPLD350-14C	14	15.07



WIRE ENTRY POINT
WIRE RANGE: 350MCM - #6AWG
PRE-FILLED W/ OXIDE INHIBITOR

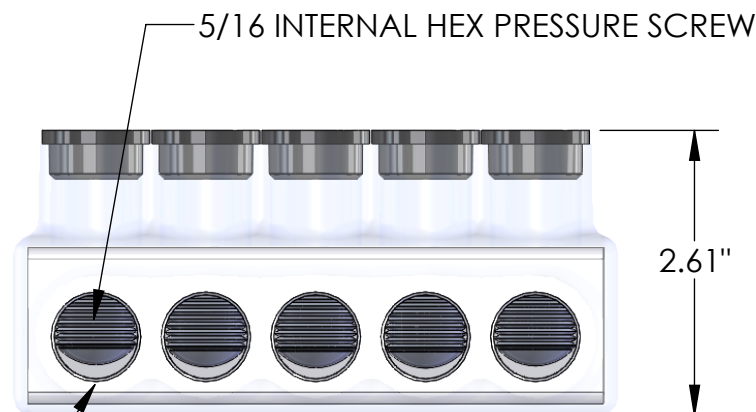

CONTACT NSi FOR SALES @ 800.321.5847



POLARIS
SALES . CO . INC

PROPRIETARY AND CONFIDENTIAL

11625 PROSPEROUS DRIVE ODESSA, FL 33556

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLARIS SALES CO. INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
POLARIS SALES CO. INC. IS PROHIBITED.

TITLE:

CLEAR INSULATED DUAL
ENTRY 350 CONNECTOR

NAME DATE
DRAWN BY T.MITCHELL 12/2021

DWG. NO.
IPLD350C SERIES

MATERIAL: N/A

SCALE: N/A

SHEET: 1 OF 1

NOTES:

1. CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
2. UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
3. DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
4. COLD TEMPERATURE RATED TO -45°C.
5. HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION AND CHEMICAL RESISTANT.