

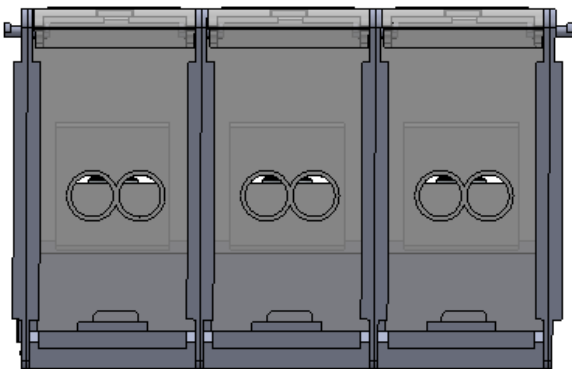
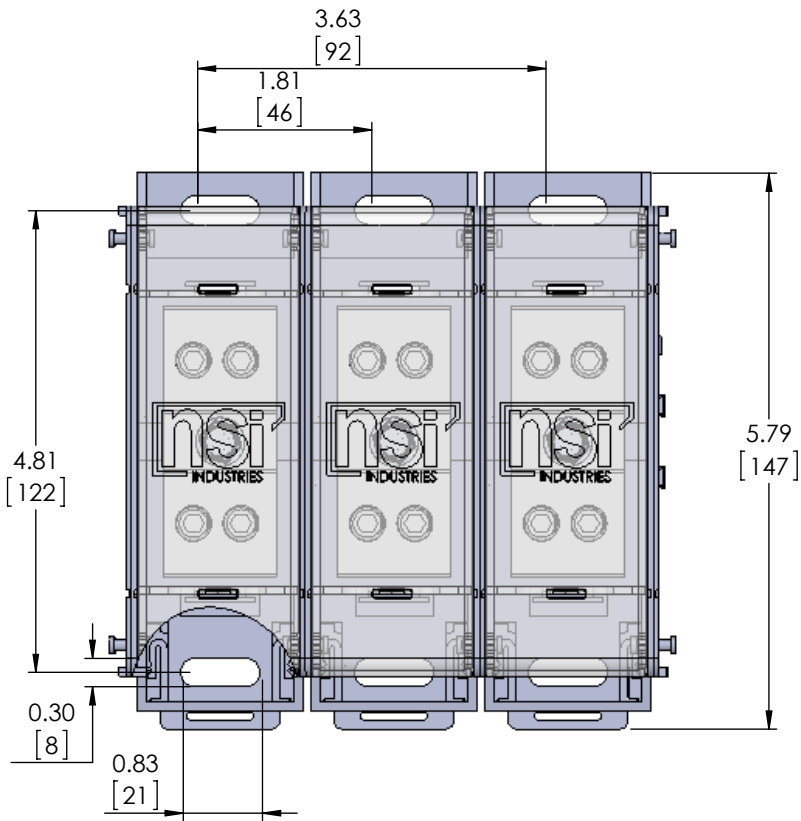


FEATURES:


- AVAILABLE IN BOTH AN OPEN STYLE AND A FINGER SAFE STYLE
- cULus LISTED TO UL 1953 AND 1059
- AL9CU RATED
- FINGER SAFE STYLES PROVISION
- OPTIONAL TOP COVER FOR OPEN STYLE (NPDA)FOR ADDED
- 100KA SCCR RATING WITH CORRECT FUSING

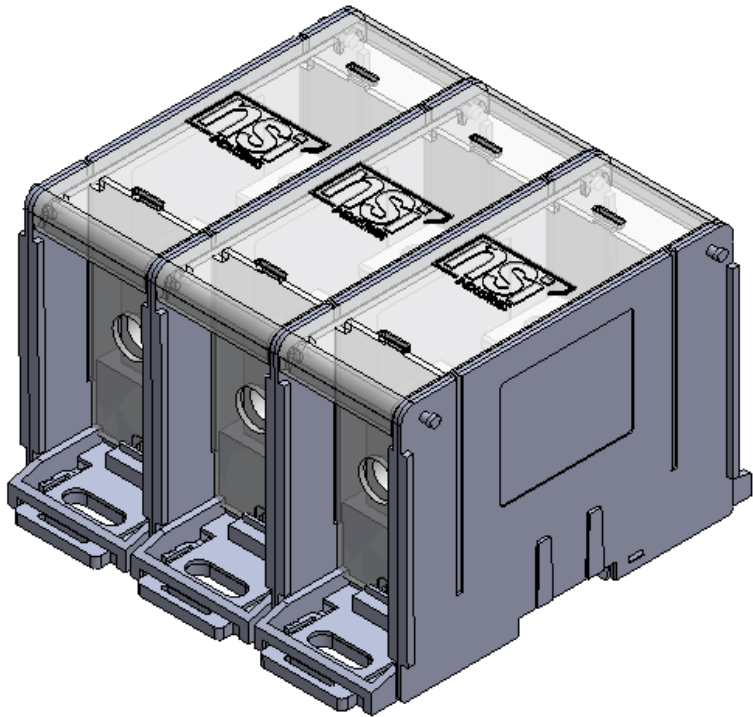

RUN SIDE

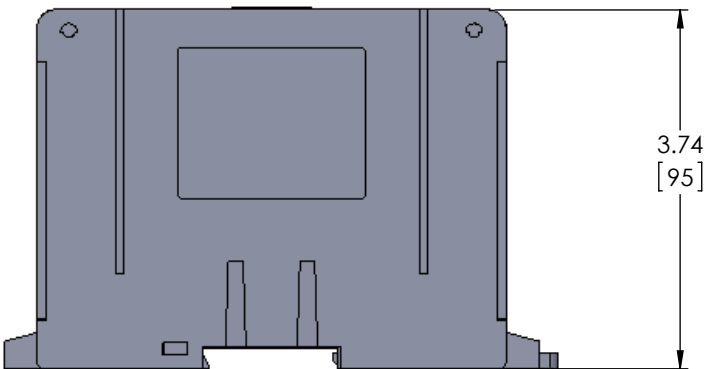

DIN RAL STYLE

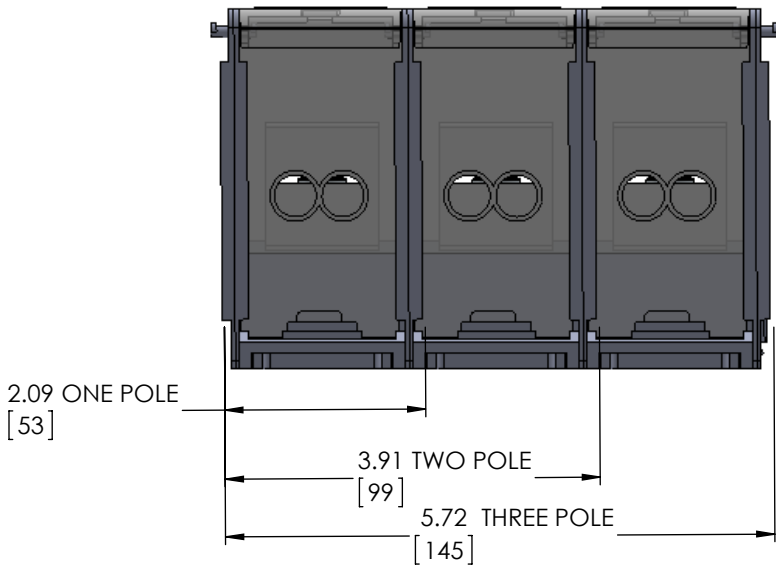

TAP SIDE

NPDB - 22 - 2/0 - 3

- NUMBER OFF POLES
- WIRE RANGE
- FIRST DIGIT RUN AND SECOND DIGIT TAP
- NSI POWER DISTIBUTION BLOCK

NOTES:

- DIMENSIONS IN BREKETS [] ARE IN MILIMETERS RONDED OFF TO THE NEAREST MILIMETER ,UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
- MATERIALS : BASE , POLE SEPERATING SIDE AND LOCK - NYLON 66 GF30%
BLOCK AND RETENATION SCREWS -TIN PLATTED ALUMINIUM
FINGER SAFE COVERS -POLYCARBONATE
BLOCK MOUNTING HARD WEARE - STAINLESS STEEL

DO NOT SCALE DRAWING		REVISION	
NSI INDUSTRIES			
TITLE: NPDB -22-2/0-3			
DWG NO.			A3
		SHEET 1 OF 1	