

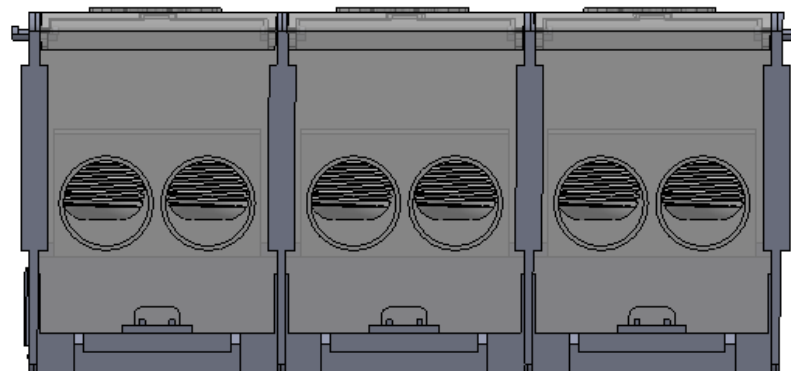
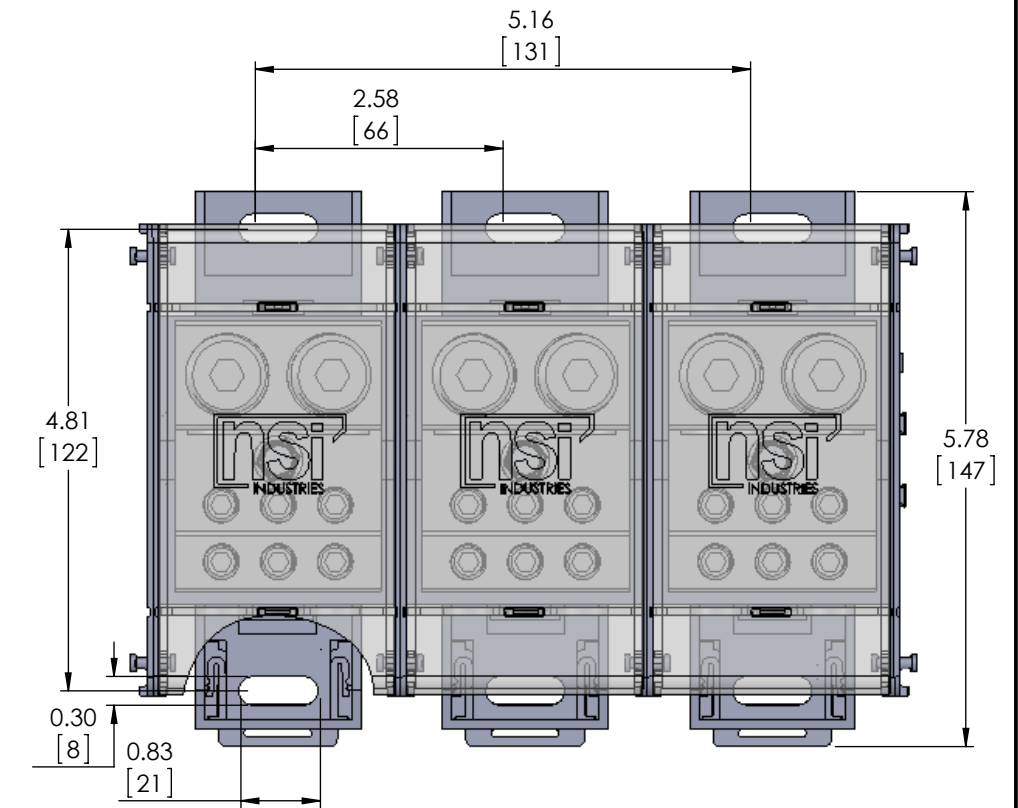


FEATURES:



AVAILABLE IN BOTH AN OPEN STYLE AND A FINGER SAFE STYLE
 cULus LISTED TO UL 1953 AND 1059
 AL9CU RATED
 FINGER SAFE STYLES PROVISION
 OPTIONAL TOP COVER FOR OPEN STYLE (NPDA)FOR ADDED
 100KA SCCR RATING WITH CORRECT FUSING

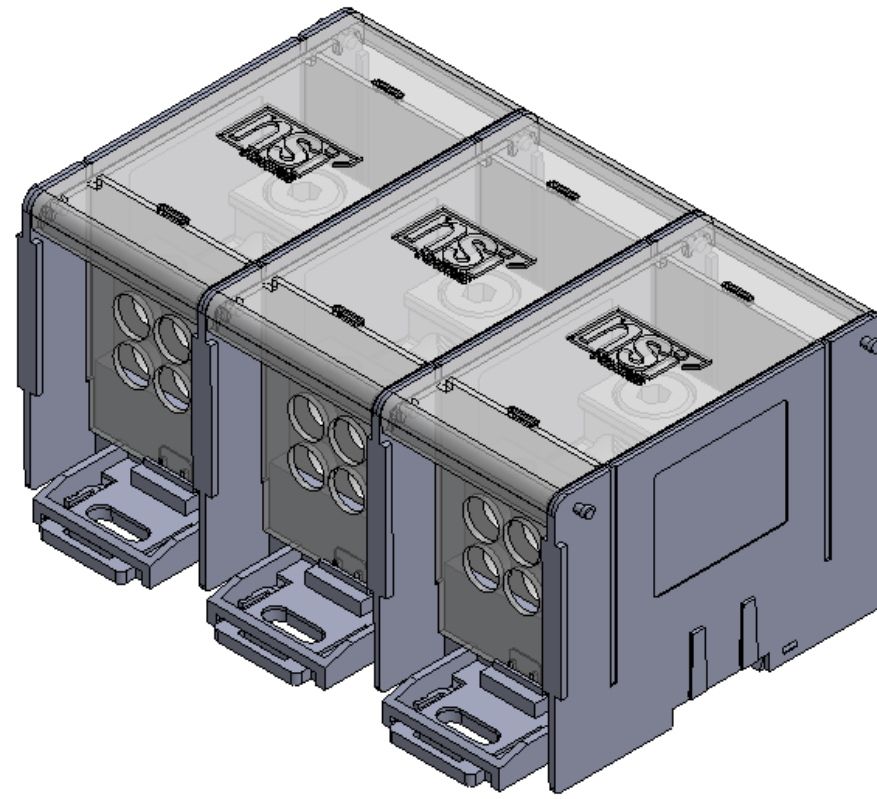

RUN SIDE

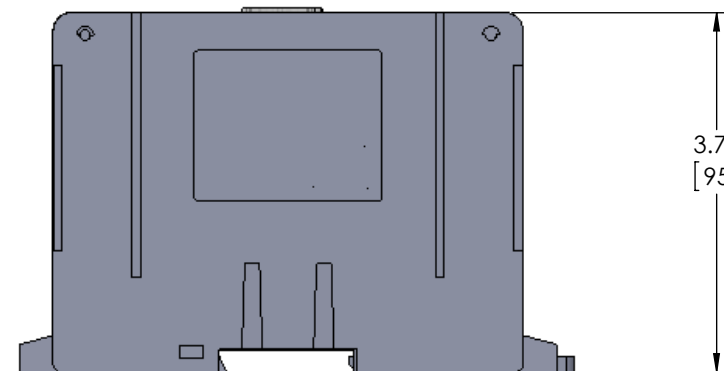

DIN RAL STYLE

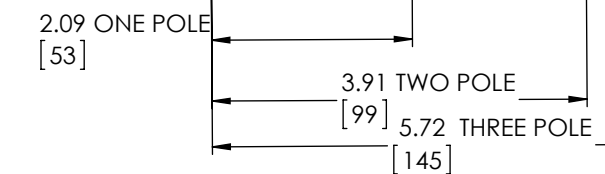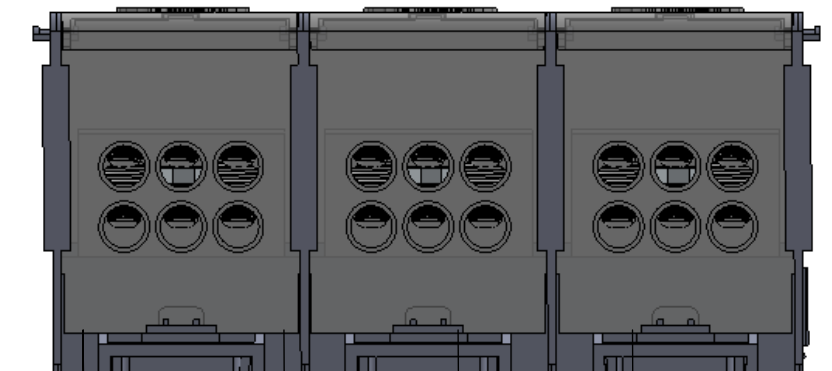

TAP SIDE

NPDB - 26 - 500 - 3

NUMBER OF POLES
 WIRE RANGE
 FIRST DIGIT RUN AND SECOND DIGIT TAP
 NSI POWER DISTRIBUTION BLOCK

NOTES:

- DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
- MATERIALS : BASE, POLE SEPARATING SIDE AND LOCK - NYLON 66 GF30%
 BLOCK AND RETENTION SCREWS - TIN PLATED ALUMINIUM
 FINGER SAFE COVERS - POLYCARBONATE
 BLOCK MOUNTING HARD WEARE - STAINLESS STEEL

DO NOT SCALE DRAWING		REVISION
NSI INDUSTRIES		
TITLE: NPDB -26-500-3		
DWG NO.		A3
SHEET 1 OF 1		