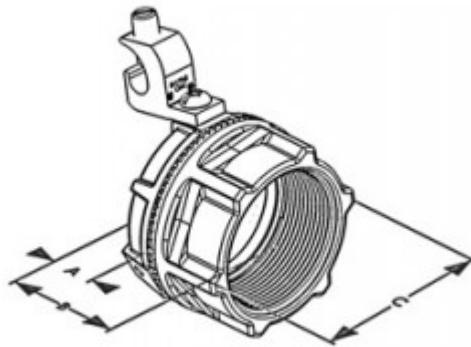


Threaded Grounding and Bonding Hub, Zinc Die Cast, Size 1-1/2 Inch, Aluminum Lay-in Lug

Grounding Hubs connect Rigid/IMC conduit to an enclosure, offering Supply-Side Equipment Bonding and grounding options. The combination of an insulated threaded hub and grounding locknut provides a reliable ground fault path for service entrance equipment, eliminating the need to install an additional grounding bushing. Bridgeport's Grounding Hubs meet the requirements of NEC Article 250.92 for Bonding of Equipment for Services and NEC 250.97 for circuits rated over 250V.

[Download Photo](#)[Download Drawing](#)[Download Drawing](#)

Product details

Catalog Number:	165-DCG
UPC Number:	78174709165
Primary Materials:	Zinc Die Cast
Finish:	Ball Burnished Mirror Smooth
Trade Size:	1-1/2"
Unit Quantity:	2
Standard Package Quantity:	20

Dimensions

Trade Size:	1-1/2"
Dimensions A:	.395
Dimensions B:	2.035
Dimensions C:	2.56

Certifications & Codes

UNSPSC: 39121311**Nema Standard:** FB-1**UL Standard:** Listed ETL Conforms to UL STD 514B Certified to CAN/CSA STD. C22.2 No. 18.3**Country Of Manufacture:** USA