




ECOM+SPMA

Ref.	Pic.	Qty.
A		M5 2
B		M5 2

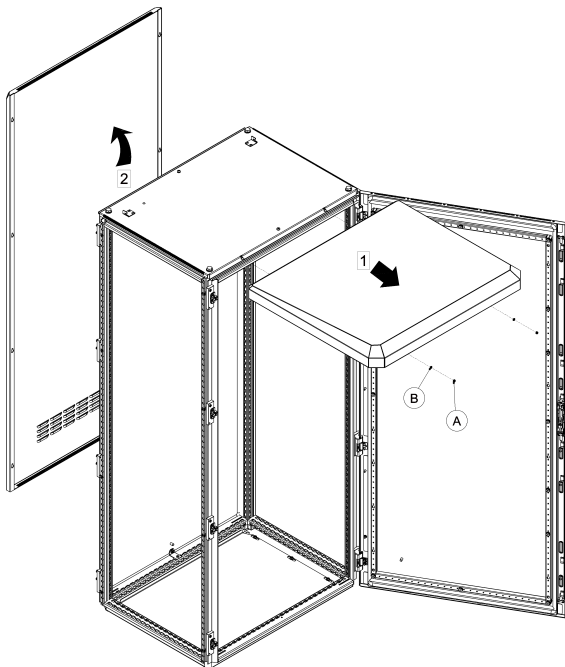


WARNING: When mounting on or over a combustible surface, a floor plate of at least 1.43 mm galvanized or 1.6 mm uncoated steel extended at least 150 mm beyond the equipment on all sides must be installed.

WARNING: In order to maintain the environmental integrity of the enclosure, devices with the same environmental ratings shall be used to close openings in customized enclosure.

ECOM+SPMA




Ref.	Pic.	Qty.
A		4
B	M6x16	16
C	M5x10	4
D	M6	4

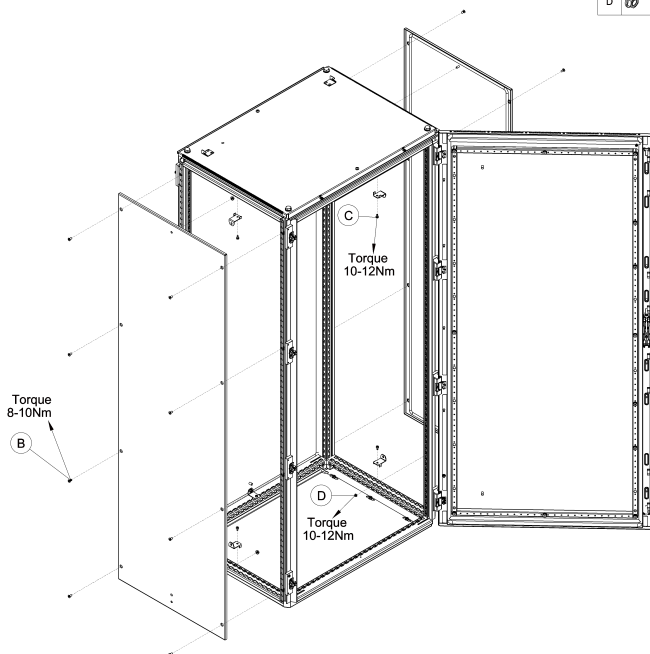

ECOM+SPMA





Ref.	Pic.	Qty.
A		M5x12 16

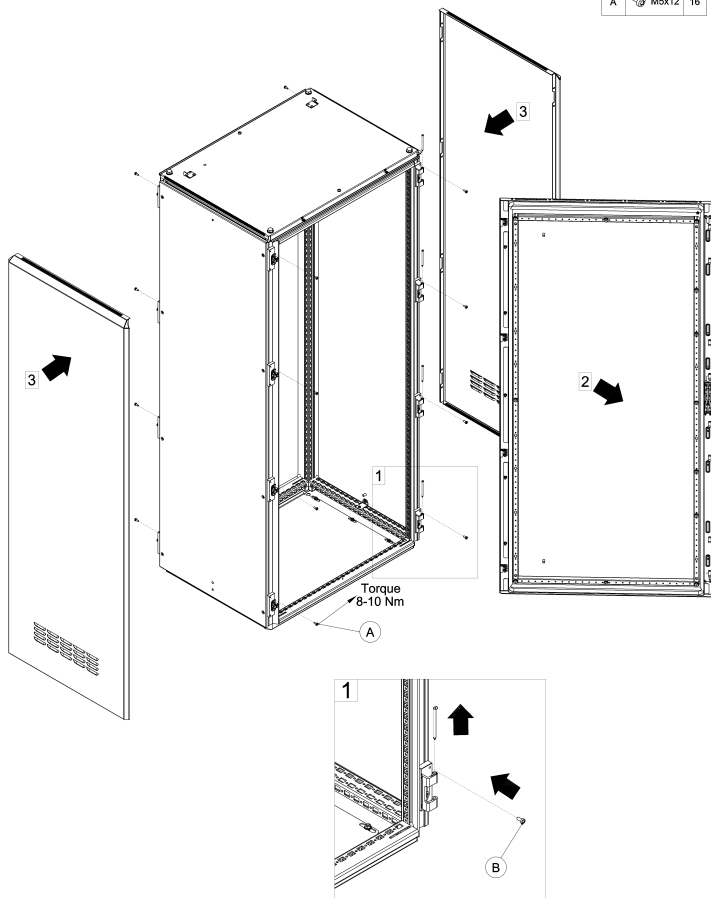




ECOM+SPMA

Ref.	Pic.	Qty.
A		M5 2
B		M5 2

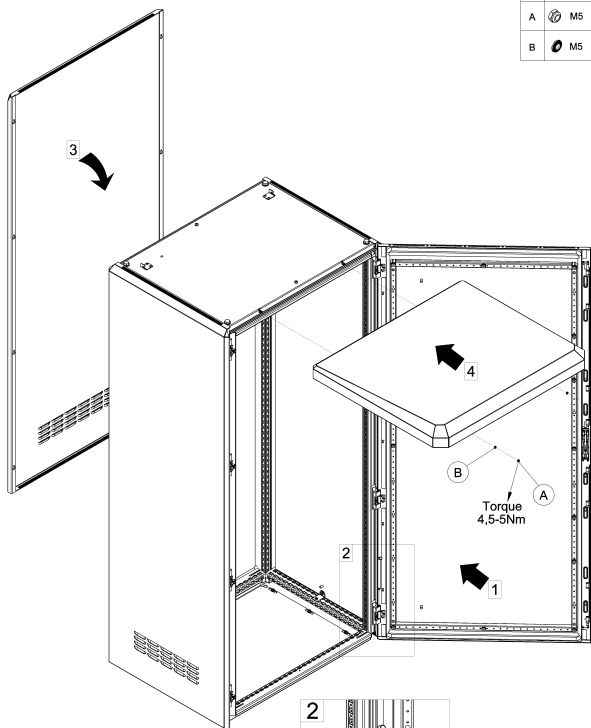




ECOM+SPMA

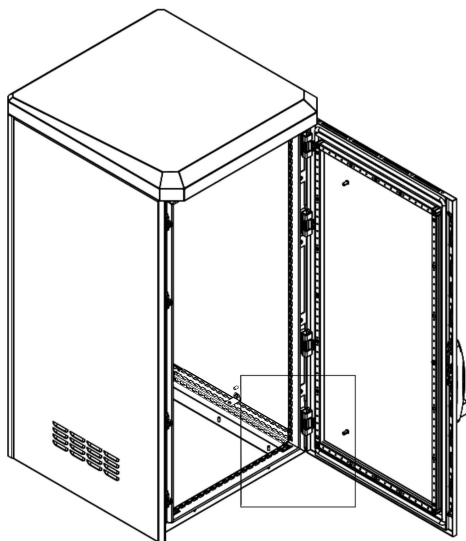

Pic.	Qty.
 M8x25	3
 M8	4
 M8	3
 M8	5
 M8	2
 M8	2

Torque
8-9Nm



Torque
8-9Nm