


Dual-Rated Mechanical Connectors

Type ASL — ALCÜL™ Two-Conductor, Two-Hole Mount



CAT. NO.	CONDUCTOR RANGE (AL OR CU)		DIMENSIONS (IN.)					
	MAX.	MIN.	L	W	H	D	F	
ASL60-22	600 kcmil	2 Str.	4 ²⁹ / ₃₂	1½	3	¾	⅜	⅜
ASL75-22	750 kcmil	3/0 Str.	4 ²⁹ / ₃₂	1½	3	¾	⅜	⅜


UL 486B
AL9CU

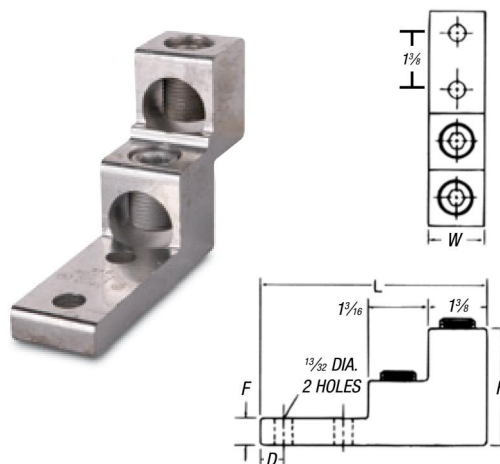

Type ASL — ALCÜL™ Three-Conductor, Two-Hole Mount



CAT. NO.	CONDUCTOR RANGE (AL OR CU)		DIMENSIONS (IN.)					
	MAX.	MIN.	L	W	H	D	F	I
ASL60-32	600 kcmil	2 Str.	4 ²⁹ / ₃₂	2½	3	¾	⅜	1½
ASL75-32	750 kcmil	3/0 Str.	4 ²⁹ / ₃₂	2 ²⁷ / ₂₁	3	¾	⅜	1½

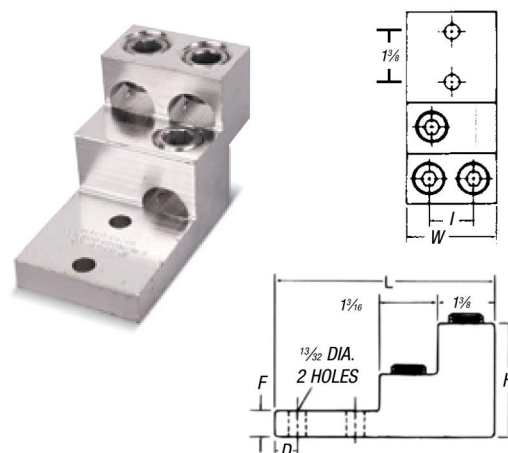

Type ASL — ALCÜL™ Four-Conductor, Two-Hole Mount



CAT. NO.	CONDUCTOR RANGE (AL OR CU)		DIMENSIONS (IN.)					
	MAX.	MIN.	L	W	H	D	F	I
ASL60-42	600 kcmil	2 Str.	4 ²⁹ / ₃₂	2½	3	¾	⅜	1½
ASL75-42	750 kcmil	3/0 Str.	4 ²⁹ / ₃₂	2 ²⁷ / ₂₁	3	¾	⅜	1½

