



Catamount®

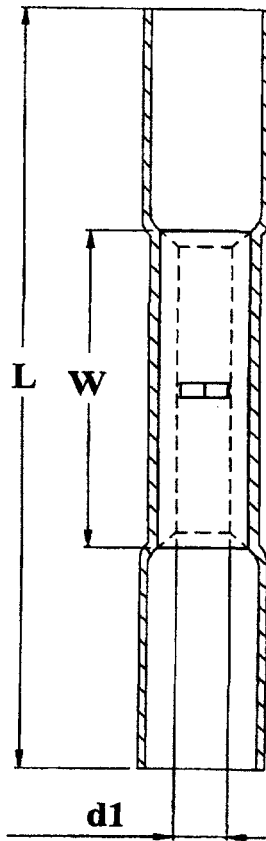

1. OPERATING PARAMETERS:
600V MAX., 105°C MAX.
2. 150°C SHRINK TEMPERATURE
3. CRIMP TOOLING:
22-10 AWG: CM2000G
8 AWG: IZUMI 8
4. MATERIAL:
INSULATION - HIGH DENSITY PE
TERMINAL - COPPER ALLOY

ALL DIMENSIONS ARE FOR
REFERENCE ONLY.

THS18-BS-M	1.417	.591	.067	22-16	RED
THS8-BS-W	1.930	.830	.181	8	RED
THS10-BS-D	1.614	.600	.134	12-10	YELLOW
THS14-BS-D	1.417	.600	.090	16-14	BLUE
T&B CAT. NO.	L	W	d1	WIRE RANGE (AWG)	INSULATED COLOR

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR
REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS []
ARE IN METRIC UNITS.

REVISIONS

SEE ERN (****)
FOR APPROVAL SIGNATURES
& RELEASE DATE.
PROJECT NO: ****

Thomas & Betts
www.tnb.com

DESCRIPTION:

**BUTT SPLICE CONNECTORS
HEAT SHRINKABLE INSULATED**

ORIGINAL PROJECT NO / (ERN NO)

TM401341 / (2008513)

SHEET NO:

1 OF 1

REV. NO:

**

DRAWING NO:

WSD-000374