


Dual-Rated Mechanical Connectors

All-aluminum-body lugs for use on copper and aluminum conductors.

- Easy installation — no special tools required
- Tin plated for low contact resistance

Type ADR—ALCÜL™ Single-Conductor, One-Hole Mount*


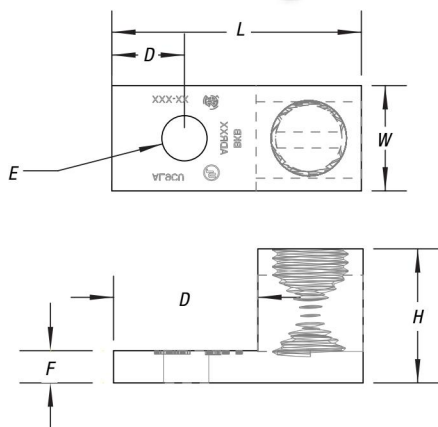


CAT. NO.	CONDUCTOR RANGE (AL OR CU)		DIMENSIONS (IN.)						
	MAX.	MIN.	L	W	H	D	E	F	G
Slotted Screw									
ADR6	#6 Str.	#14	1 3/64	1/2	3 1/64	15/64	1/4	5/64	43/64
ADR2	#2 Str.	#14	1 3/32	1/2	9/16	19/64	1/4	7/64	1 1/16
ADR11	1/0 Str.	#14	1 13/32	5/8	25/32	7/16	1/4	3/16	27/32
ADR21	2/0 Str.	#14	1 15/32	5/8	29/32	7/16	1/4	3/16	27/32
Socket Screw									
ADR25	250	#6 Str.	2	1	1 1/8	15/32	5/16	1/4	1
ADR30	300	#6 Str.	2	1	1 1/8	15/32	5/16	1/4	1
ADR35	350	#6 Str.	2 1/4	1 1/8	1 1/4	1/2	3/8	1/4	1 1/8
ADR50	500	#4 Str.	2 13/16	1 1/2	1 1/8	3/4	3/8	5/16	1 19/32
ADR60	600	#2 Str.	3 3/16	1 1/2	1 1/8	13/16	3/8	7/16	1 13/16
ADR6004*	600 (2) 250	#4 Str. (2) 1/0 Str.	2 13/16	1 3/8	1 13/16	5/8	3/8	5/16	1 1/2
ADR80	800	300	3 3/8	1 3/4	1 15/16	5/8	5/8	1/2	1 3/4
ADR99	1000	500	3 3/8	1 3/4	1 15/16	5/8	5/8	1/2	1 3/4

* Not UL Listed or CSA Certified.

- UL® 486B tested, AL9CU rated
- Slotted screw on lugs up through 2/0 str.; 5/16" socket screw on sizes 250 through 350 kcmil; 3/8" hex socket on sizes 500 kcmil and above

Type ADR—ALCÜL™ Single-Conductor, Two-Hole Mount*



CAT. NO.	CONDUCTOR RANGE (AL OR CU)		DIMENSIONS (IN.)						
	MAX.	MIN.	L	W	H	D	E	F	G
ADR35-12#	350 kcmil	6 Str.	4 1/4	1 1/4	1 3/8	5/8	1/2	5/16	3
ADR60-12D	600 kcmil	2 Str.	5 5/16	1 1/2	1 1/2	5/8	1/2	3/8	3 1/16
ADR80-12D	800 kcmil	300 kcmil	6 3/16	1 3/4	1 1/8	5/8	1/2	9/16	3 7/16
ADR99-12D	1,000 kcmil	500 kcmil	6 3/16	1 3/4	1 1/8	5/8	1/2	9/16	3 7/16

* NEMA spacing: 1 3/4" centers

UL Listed. Connectors accommodating conductors 600 kcmil and larger have double row of set screws (D suffix).