

Issue Date: 03/26/2015
Page: 1 of 2
File: PSS-600ECS-30PCJ

Sealing & Grounding Kit for Power Cable Joint

600ECS-30PCJ



600ECS-30PCJ Sealing & Grounding Kit for Power Cable Joints

Applications:

Used for Elastimold's **PCJ** (Power Cable Joints for concentric neutral cables). The straight joint is a permanent, fully shielded, fully submersible joint or aluminum and/or aluminum to copper conductor, wire shielded cables, with a continuous operating current rating equal to that of the cable on which it is installed and a rated voltage as indicated on the joint housing.


Features:

- Cold Shrinkable Jacket Seal O.D with a minimum of 1.28 inches (32.51 mm.) and a maximum of 2.30 inches (58.42 mm.). (600 ECS Series)
- Mastic strips for sealing purposes.
- Temperature Range: -40° Celsius (-40° Fahrenheit) to 65° Celsius (149° Fahrenheit).
- Used for medium voltage cables with concentric neutral wire.

Issue Date: 03/26/2015
 Page: 2 of 2
 File: PSS-600ECS-30PCJ

Sealing & Grounding for Power Cable Joint

600ECS-30PCJ

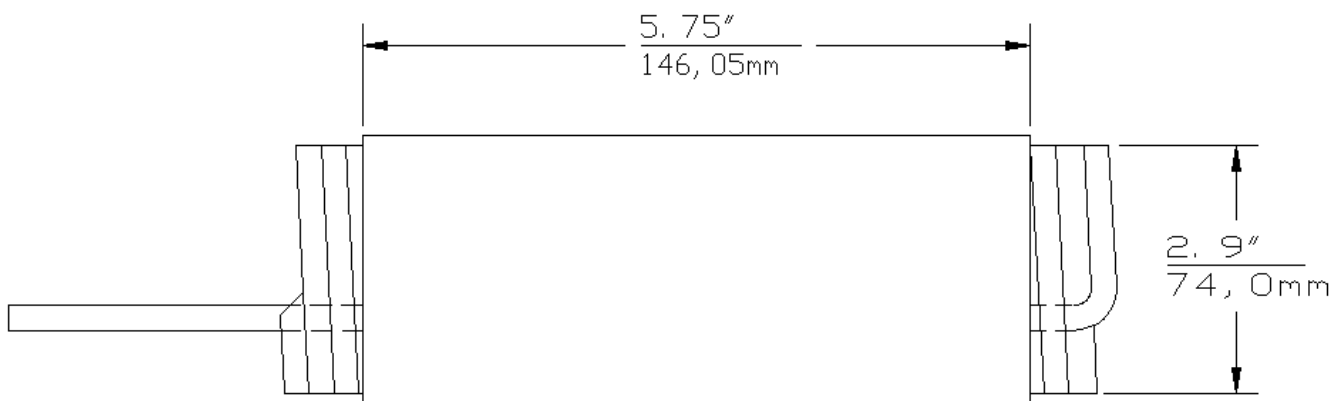

NOTE: WHEN APPLIED TO CABLE, 600ECS's LENGTH WILL INCREASE UP TO 8" DEPENDING ON CABLE O.D.

Each kit contains the following:

3	Cold Shrink Tube	600ECS
3	Jacketing Tape 1.5" x 30'L	15-414-5
5	Mastic (Butyl Auto Tape) 3/PKG	350-37-3
1	Instruction Sheet	IS-1455

Ordering Instructions:

To order Sealing & Grounding Kit for Power Cable Joints, specify **600ECS-30PCJ**.