

Issue Date: 01/29/2014
Page: 1 of 2
File: PSS-K1601PCC-R

15/25 kV	Epoxy Flanged Well w/ Replaceable Well Stud	200A	K1601PCC-R
-------------	--	------	------------



Features:

- 15/25 kV, 200 Amp Loadbreak Rated
- Equipped with copper conductor rod
- Molded epoxy flange for gasketed clamp mounting

K1601PCC-R Epoxy Flanged Well with replacement well stud

Applications:

The K1601PCC clampable bushing well is designed to be directly mounted in oil-filled electrical apparatus for systems rated through 25kv, 200 amps. The bushing well is externally clamped in place and does not require welding to the apparatus. It is required that the entire shank length be completely immersed in oil. Applications include:

- Pad-mounted transformers
- Voltage regulators
- Reclosers
- Switchgear

The K1601PCC clampable bushing well provides the mating interface to accept other ELASTIMOLD products including 1601A4, 1602A3R, 2701A4 and 2702A1 loadbreak bushing inserts and K1501A1 deadbreak bushing inserts

Ratings:

Meets ANSI/IEEE Standard 386, Latest Revision

For 15kV Voltage Class:


8.3kV Max Phase-to-Ground – Operating Voltage
14.4kV Max Phase-to-Phase
95kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
34kV AC – One minute withstand
53kV DC – 15 minutes withstand
11kV AC – Corona Extinction @ 3pC sensitivity
200 Amp – Continuous and Loadbreak
10kA Sym – 10 Cycles Momentary & Fault Close

For 25kV Voltage Class:

15.2kV Max Phase-to-Ground – Operating Voltage
26.3kV Max Phase-to-Phase
125kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
40kV AC – One minute withstand
78kV DC – 15 minutes withstand
19kV AC – Corona Extinction @ 3pC sensitivity
200 Amp – Continuous and Loadbreak
10kA Sym – 10 Cycles Momentary & Fault Close

Issue Date: 01/29/2014
Page: 2 of 2
File: PS-K1601PCC-R

15/25 kV	Epoxy Flanged Well w/ Replaceable Well Stud	200A	K1601PCC-R
-------------	--	------	------------

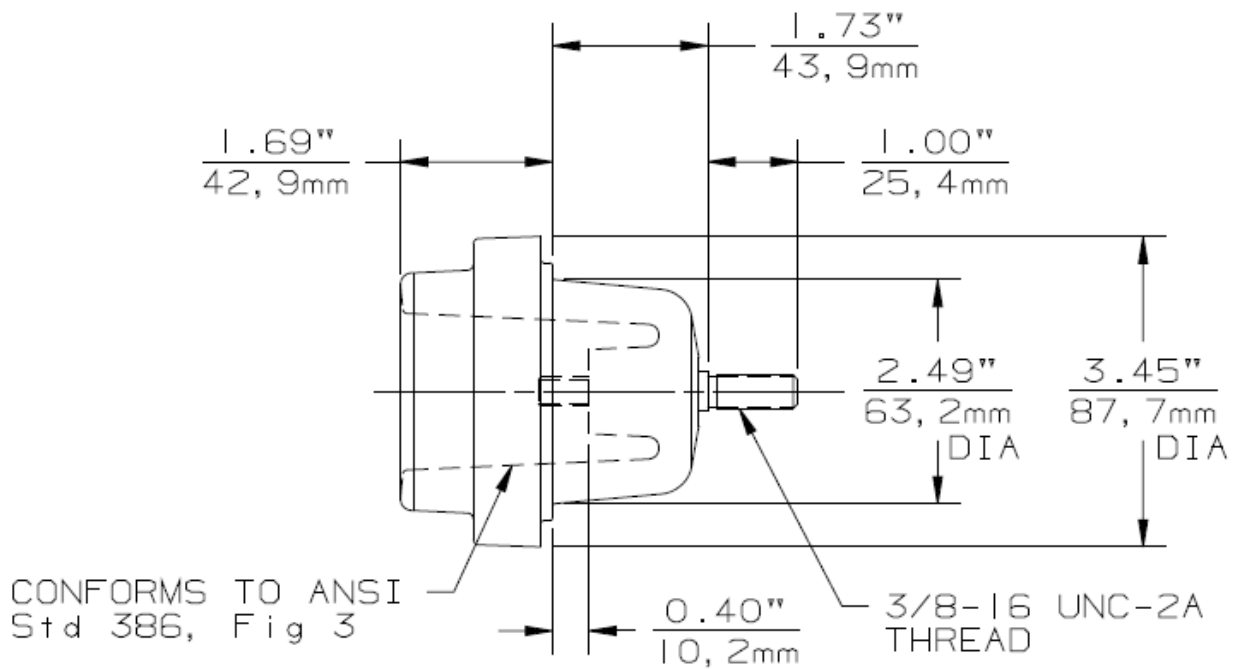

Ordering Instructions:

To order 200A 15/25 kV Loadbreak Well w/
replaceable stud, specify **K1601PCC-R**.

Each kit contains the following:

1 Epoxy Flanged Well	K1601PCC-R
1 Silicone Lubricant	82-08
1 Instruction Sheet	IS-0231