

Issue Date: 11/12/2012

Page: 1 of 2

File: PSS-273RLR-W5X

25kV	200A Loadbreak Replacement Elbow	w/o Test Point	273RLR-W5X
------	----------------------------------	----------------	------------



Features:

- Extended length housing and compression lug
[+ 10-1/2" (266,7 mm)]
- 25kV, 200A Loadbreak Elbow Connector
- Fully shielded, fully submersible molded rubber housing
- 100% Peroxide-cured insulation, insert and jacket
- Provision for hot stick operation
- Provision for ground wire connection
- Wide cable range with minimum number of cable sizes

273RLR Loadbreak Replacement Elbow Connector

Applications:

The Elastimold® 273RLR Replacement Elbow is a fully rated 25kV, 200 Amp Class loadbreak elbow connector with a lengthened compression lug and housing. The Replacement Elbow accommodates cables that are too short to be connected with a standard elbow. The 273RLR is designed for connecting to and operating 25kV Class, 125kV BIL apparatus. Typical uses for the special characteristics of the 273RLR Replacement Elbow include the following:

- Repair of a failed elbow connection where the cable must be stripped back and a new compression lug applied.
- To gain extra length when cables have been accidentally trimmed too short or to connect new apparatus to existing cables.
- Convert equipment connections from live front to dead front without changing cable.


Ratings:

Meets ANSI/IEEE Standard 386, Latest Revision

For 25kV Voltage Class:

15.2kV Max Phase-to-Ground – Operating Voltage
26.3kV Max Phase-to-Phase
125kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
40kV AC – One minute withstand
78kV DC – 15 minutes withstand
19kV AC – Corona Extinction @ 3pC sensitivity
200 Amp – Continuous and Loadbreak
10kA Sym – 10 Cycles Momentary & Fault Close

25kV	200A Loadbreak Replacement Elbow	w/o Test Point	273RLR-W5X
------	----------------------------------	----------------	------------

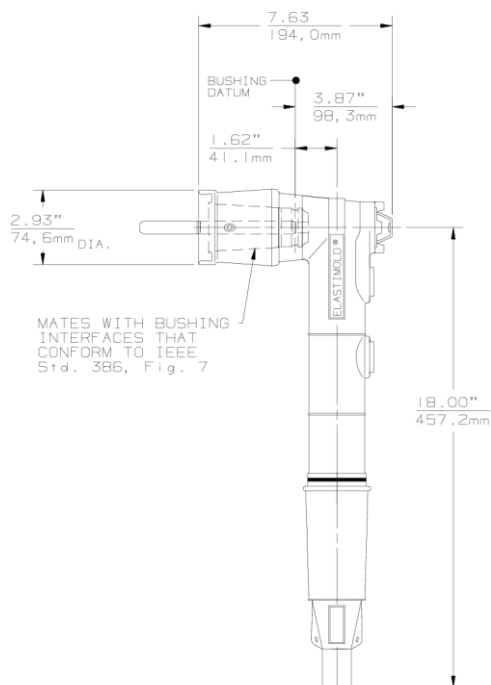

CATALOG NUMBER SELECTION

Step 1 (W)

Determine the insulation diameter of the cable. Select the insulation letter code that best straddles the insulation diameter from W table below. Insert code into catalog number.

Step 2 (X)

Choose the proper compression lug code according to the conductor size from the Conductor Code Table. Insert code into catalog number.

Example:

The ordering number for a Replacement Elbow for a 1/0 compressed/stranded, 260 mil wall cable with an insulation diameter of .885" to .975" is 273RLR-H5240.

273RLR

W Code

XXX Code

5

Cable Insulation Diameter in Inches		Cable Insulation Diameter in mm		Symbol for W
MIN.	MAX.	MIN.	MAX.	
0.760	0.950	19.30	24.13	G
0.850	1.050	21.59	26.67	H
0.980	1.180	24.89	29.97	J
1.090	1.310	27.69	33.27	K

XXX Code	Conductor Size AWG or kcmil			Connector only
	Strand./ Compr.	Solid/ Comp.	mm ²	Bi-Metal
190	-	#4	16.76	00400190
200	#4	#3	21.14	00400200
210	#3	#2	26.67	00400210
220	#2	#1	33.62	00400220
230	#1	1/0	42.41	00400230
240	1/0	2/0	53.49	00400240
250	2/0	3/0	67.43	00400250
260	3/0	4/0	85.01	00400260
270	4/0	250	26.67	00400270

Each kit contains the following:

1	Elbow connector housing	273BRLR-W
1	Bi-metal compression lug	00400XXX
1	Probe wrench	271-94
1	Probe	274LRF
1	Tube, lubricant	82-08
1	Installation instruction	IS-0425
1	Hose clamp	65-27-2
1	Crimp chart	CC-0060