

Issue Date: 05/11/2018
 Page: 1 of 3
 File: PSS_K655LRTP-W0X

25 kV	STICK-OP Connector Kit w/o Test Point	600A	K655LRTP-W0X
-------	---------------------------------------	------	--------------



Features:

- 25kV, 600/200 Amp Rated Loadbreak
- 25 KV Reducing Tap Plug.
- Includes hex-broach for torque installation.
- Peroxide-cured insulation and jacket.
- All copper current path.
- Constructed of EPDM molded rubber.

K655LRTP-W0X STICK-OP Connector Kit w/o Test Point

Applications:

STICK-OP connectors allow direct testing and grounding with no required cable movement. Stick-OP provides an external visible break by hotstick removal of the elbow. Installed on apparatus, this remarkably convenient system permits you to take full advantage of the greater safety in deadfront construction, with its reduced spaced requirements – a particularly significant factor at higher voltage levels.

Ratings:



Meets ANSI/IEEE Standard 386, Latest Revision

For 25kV Voltage Class:

15.2kV Max Phase-to-Ground – Operating Voltage
 26.3kV Max Phase-to-Phase
 125kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
 40kV AC – One minute withstand
 78kV DC – 15 minutes withstand
 19kV AC – Corona Extinction @ 3pC sensitivity
 600 Amp – Continuous
 25kA Sym – 10 Cycles Momentary

Issue Date: 05/11/2018
 Page: 2 of 3
 File: PSS_K655LRTP-W0X

25 kV	STICK-OP Connector Kit w/o Test Point	600A	K655LRTP-W0X
-------	---------------------------------------	------	--------------

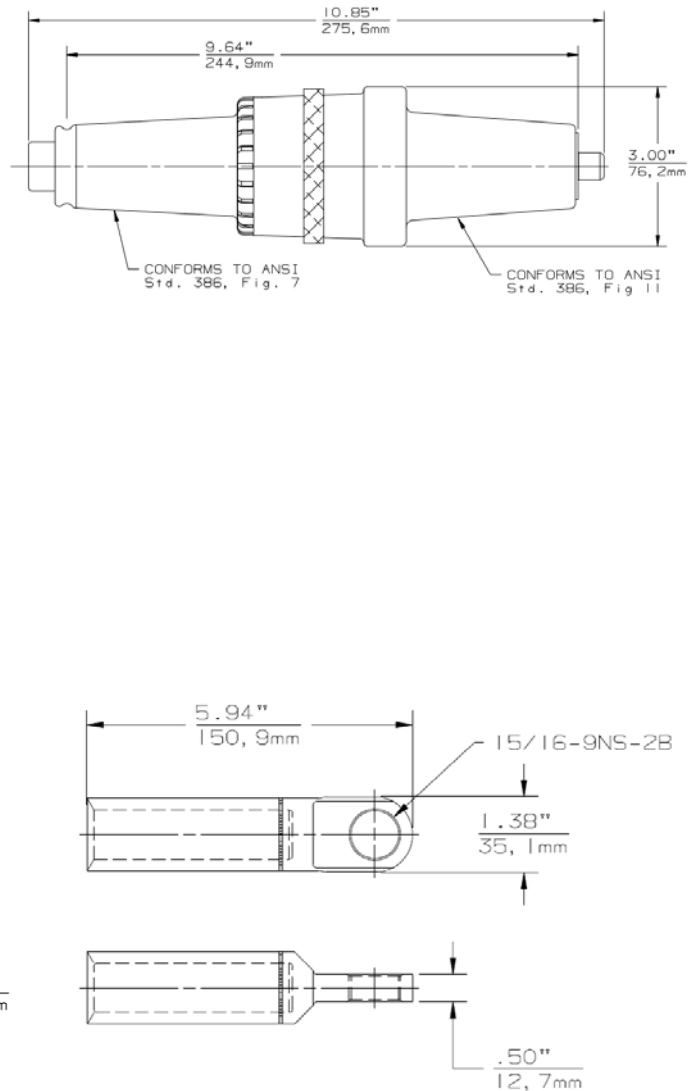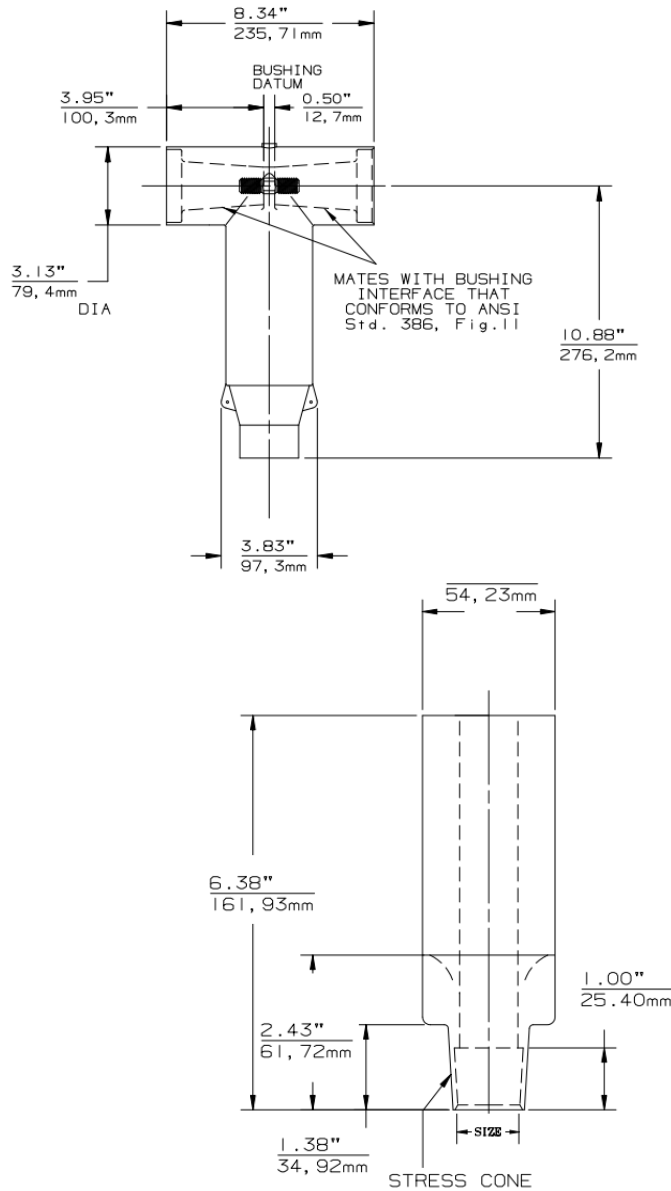

25 kV	STICK-OP Connector Kit w/o Test Point	600A	K655LRTP-W0X
-------	---------------------------------------	------	--------------

Example:

The ordering number for a 600 Amp STICK-OP Connector Kit w/o Test Point for a 4/0 compressed, 260 mil wall cable with an insulation diameter of 1.180" to 1.295" is K655LRTP-K0270.
For 900A series please use K675LRTP. Or when test point is needed, please use : K656LRTP.

Catalog Number Selection

Step 1 (W)

Determine the insulation diameter of the cable.
Select the insulation letter code that best straddles the insulation diameter from W table below. Insert code into catalog number.

Step 2

Choose the proper connector material type and insert it into the catalog number.

Step 3 (X)

Choose the proper compression lug code according to the conductor size from the Conductor Code Table. Insert code into catalog number.

Material Code

Universal Al	0
CU	2
Bi-metal	5

W Code

XXX Code

K655LRTP -

Cable Insulation Diameter in inches		Cable Insulation Diameter in millimeters		Symbol for W
MIN.	MAX.	MIN.	MAX.	
0.640	0.820	16.256	20.828	F
0.760	0.950	19.304	24.130	G
0.850	1.050	21.590	26.670	H
0.980	1.180	24.892	29.972	J
1.090	1.310	27.686	33.274	K
1.180	1.465	29.972	37.211	L
1.280	1.430	32.512	36.322	LM
1.370	1.630	34.798	41.402	M
1.515	1.780	38.481	45.212	N
1.725	1.935	43.815	49.149	P

X Code	AWG or kcmil		mm2	Connector Only		
	Strand./ Compr.	Solid/ Compact	Compact	Universal Aluminum	Copper	Bi-metal
210	-	2	-	03600210	03602210	05501210
220	2	1	35	03600220	03602220	05501220
230	1	1/0	50	03600230	03602230	05501230
240	1/0	2/0		03600240	03602240	05501240
250	2/0	3/0	70	03600250	03602250	05501250
260	3/0	4/0	95	03600260	03602260	05501260
270	4/0	250	125	03600270	03602270	05501270
280	250	300	-	03600280	03602280	05501280
290	300	350	150	03600290	03602290	05501290
300	350	400	185	03600300	03602300	05501300
310	400	450	240	03600310	03602310	05501310
320	450	500/550	-	03600320	03602320	05501320
330	500	600	250/300	03600330	03602330	05501330
350	600	700	-	03600350	03602350	05501350
360	650	750	400	03600360	03602360	05501360
380	700/750	900	-	03600380	03602380	05501380
390	800	-	-	03600390	03602390	05501390
400	900	1000	500	03600400	03602400	05501400
410	1000	-	-	03600410	03602410	05501410
420	-	1250	-	03600420	03602420	05501420
440	1250	-	-	03600440	03602440	05501440

Each kit contains the following:

- | | |
|--|------------|
| 1 600 Series Elbow Housing | K655BLR |
| 1 STICK-OP Loadbreak Reducing Tap Plug | K650LRTPA2 |
| 1 Cable Size Adapter | 655CA-W |
| 1 Compression Lug | 03600X |
| 3 Silicone Lubricant | 82-08 |
| 1 Instruction Sheet | IS-0249 |
| 1 Crimp Chart | CC-0047 |