


ALL	600A Deadbreak Bi-Metal Contact	04601XXX
-----	---------------------------------	----------



04601XXX bi-metallic connectors consist of a copper tip section and a universal aluminum crimp barrel for aluminum or copper conductor. Units are designed for use with **K655/K656LR** and **755/756LR** elbows on aluminum or copper conductors.

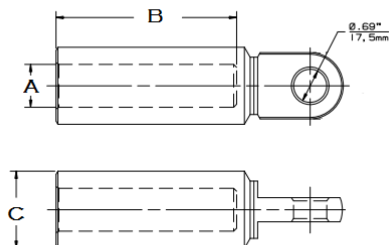

Catalog Number	"A" (inches)	"B" (inches)	"C" (inches)
04601220	0.315	3.500	0.787
04601230	0.354	3.500	0.787
04601240	0.397	3.500	0.787
04601250	0.444	3.500	0.787
04601260	0.496	3.500	0.787
04601270	0.546	3.500	0.984
04601280	0.609	3.625	0.984
04601290	0.656	3.750	0.984
04601300	0.179	3.750	1.260
04601310	0.750	3.750	1.260
04601320	0.796	3.750	1.260
04601330	0.844	3.750	1.600
04601340	0.890	3.750	1.600
04601350	0.922	3.750	1.600
04601360	0.968	3.750	1.600
04601380	1.031	3.750	1.600
04601390	1.078	3.750	1.850
04601400	1.125	3.750	1.850
04601410	1.205	3.750	1.850
04601420	1.250	3.750	1.850
04601440	1.320	3.750	1.850

Ordering Instructions:

X Code	AWG or kcmil		Connector
	Strand./ Compr.	Solid/ Compact	Bi-metal
220	2	1	04601220
230	1	1/0	04601230
240	1/0	2/0	04601240
250	2/0	3/0	04601250
260	3/0	4/0	04601260
270	4/0	250	04601270
280	250	300	04601280
290	300	350	04601290
300	350	400	04601300
310	400	450	04601310
320	450	500/550	04601320
330	500	600	04601330
340	550	650	04601340
350	600	700	03705350
360	650	750/800	04601360
380	700/750	900	04601380
390	800	-	04601390
400	900	1000	04601410
410	1000	-	04601410
420	-	1250	04601420
440	1250	-	04600440

Each kit contains the following:

- | | | |
|---|-------------|----------|
| 1 | Connector | 04601XXX |
| 1 | Crimp Chart | CC-0050 |