

Issue Date: 05/06/2015

Page: 1 of 2

File: PSS-655CK-W0X

15/25kV	600A Series Size Sensitive Kit	w/o Test Point	655CK-W0X
---------	--------------------------------	----------------	-----------



Features:

- Fully rated 15/25kV, 600 Amp Size Sensitive Kit
- 100% peroxide-cured construction includes insulation and conductive EPDM materials

655CK 600A Series Size Sensitive Kit

Applications:

The Elastimold® 600A Series Size Sensitive Kit provides size sensitive components for all 15/25kV, 600 series connectors except Stick-Op and those products requiring a retaining ring. Kit includes, 655CA-W cable adapter and 03700XXX crimp connector.

Ratings:

Meets ANSI/IEEE Standard 386, Latest Revision



For 15kV Voltage Class:

8.3kV Max Phase-to-Ground – Operating Voltage
14.4kV Max Phase-to-Phase
95kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
34kV AC – One minute withstand
53kV DC – 15 minutes withstand
11kV AC – Corona Extinction @ 3pC sensitivity
600 Amp – Continuous
25kA Sym – 10 Cycles Momentary

For 28kV Voltage Class:

16.2kV Max Phase-to-Ground – Operating Voltage
28kV Max Phase-to-Phase
140kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
45kV AC – One minute withstand
84kV DC – 15 minutes withstand
21.5kV AC – Corona Extinction @ 3pC sensitivity
600 Amp – Continuous
25kA Sym – 10 Cycles Momentary

15/25kV	600A Series Size Sensitive Kit	w/o Test Point	655CK-W0X
---------	--------------------------------	----------------	-----------

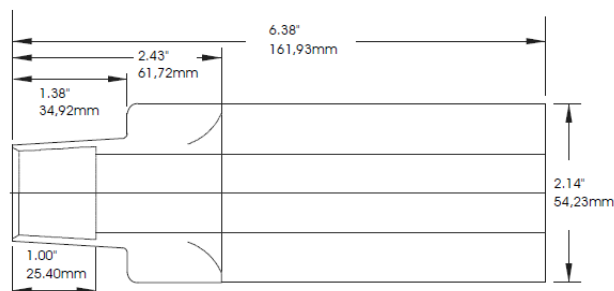

Step 1 (W)

Determine the insulation diameter of the cable.
Select the insulation letter code that best straddles the insulation diameter from W table below. Insert code into catalog number.

Step 2


Choose the proper connector material type and insert it into the catalog number.

Step 3 (X)

Choose the proper compression lug code according to the conductor size from the Conductor Code Table. Insert code into catalog number.

Example:

The ordering number for a 600 Amp Size Sensitive Kit for a 4/0 compressed, 175 mil wall cable with an insulation diameter of .865" to .950" is 655CK-H0270.

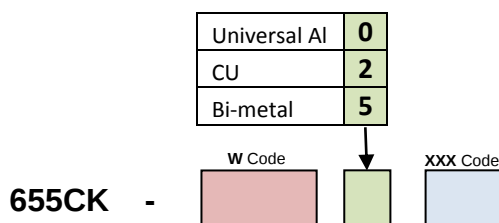

Cable Insulation Diameter in inches		Cable Insulation Diameter in millimeters		Symbol for W
MIN.	MAX.	MIN.	MAX.	
0.640	0.820	16.256	20.828	F
0.760	0.950	19.304	24.130	G
0.850	1.050	21.590	26.670	H
0.980	1.180	24.892	29.972	J
1.090	1.310	27.686	33.274	K
1.180	1.465	29.972	37.211	L
1.280	1.430	32.512	36.322	LM
1.370	1.630	34.798	41.402	M
1.515	1.780	38.481	45.212	N
1.725	1.935	43.815	49.149	P

X Code	AWG or kcmil		mm2	Connector Only		
	Strand./Compr.	Solid/Compact	Compact	Universal Aluminum	Copper	Bi-metal
210	-	2	-	03700210	03702210	04601210
220	2	1	35	03700220	03702220	04601220
230	1	1/0	50	03700230	03702230	04601230
240	1/0	2/0	-	03700240	03702240	04601240
250	2/0	3/0	70	03700250	03702250	04601250
260	3/0	4/0	95	03700260	03702260	04601260
270	4/0	250	125	03700270	03702270	04601270
280	250	300	-	03700280	03702280	04601280
290	300	350	150	03700290	03702290	04601290
300	350	400	185	03700300	03702300	04601300
310	400	450	240	03700310	03702310	04601310
320	450	500/550	-	03700320	03702320	04601320
330	500	600	250/300	03700330	03702330	04601330
340	550	650	-	03700340	03702340	04601340
350	600	700	400	03700350	03702350	03705350
360	650	750/800	-	03700360	03702360	04601360
380	700/750	900	-	03700380	03702380	04601380
390	800	-	500	03700390	03702390	04601390
400	900	1000	-	03700410	03702410	04601410
410	1000	-	-	03700410	03702410	04601410
420	-	1250	-	03700420	03702420	04601420
440	1250	-	-	03700440	03702440	04600440

Each kit contains the following:

- 1 Copper compression lug 03700XXX
- 1 Cable adapter 655CA-W
- 1 Crimp chart CC-0050