

Issue 04/06/2015
 Date:
 Page: 1 of 2
 File: PSS-K656L2

15/25kV	600A Deadbreak 2 Way L-Kit	w/ Test Point	K656L2
---------	----------------------------	---------------	--------



Deadbreak 2 Way L-Kit

- Fully shielded, fully submersible
molded rubber housing
- 100% peroxide-cured construction
includes insulation and conductive

K656L2 2-Way L-Kit

Applications:

The K656L2 2-Way L-Kit w/ Test Point is comprised of two K656LR elbow connector, two K650BIP basic insulating plugs, and one K651CP connecting plug. It is used to connect two cable ends and using the two insulating plugs as test points allows for capacitive voltage testing.

Ratings:

Meets ANSI/IEEE Standard 386, Latest Revision

For 15kV Voltage Class:

8.3kV Max Phase-to-Ground –
Operating Voltage
14.4kV Max Phase-to-Phase
95kV BIL – Impulse Withstand


Issue 04/06/2015

Date:

Page: 2 of 2

File: PSS-K656L2

15/25kV	600A Deadbreak 2 Way L-Kit	w/ Test Point	K656L2
---------	----------------------------	---------------	--------

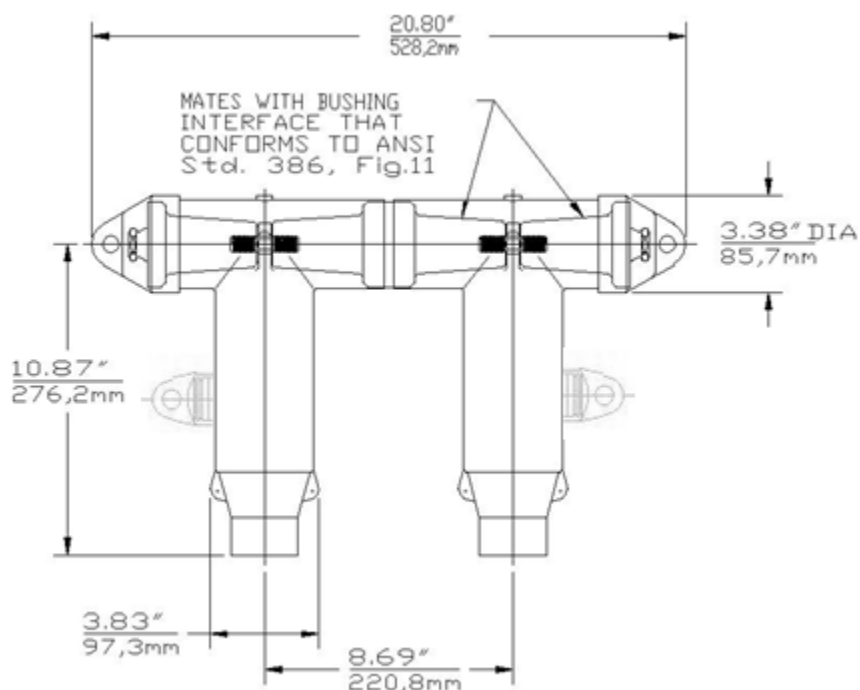

Ordering Instructions:

To order 15/25kV, 600A 2 Way L-Kit w/ Test Point, specify **K656L2**.

Each kit contains the

2	Basic Elbow	K656BLR
6	Tube, lubricant	82-08
2	Basic Insulating Plug	K650BIP
2	Stud	650SA
1	Connecting Plug	K651CP
1	Installation Instruction	IS-0230
1	Installation Instruction	IS-0249
1	Installation Instruction	IS-0915

Example:

The ordering number for a 600 Amp 2 Way L-Kit w/ Test Point is **K656L2**.