


INSTALLATION INSTRUCTIONS

for "Flood-Seal"®
YY-Type Disconnect Kits
YFU and YDU

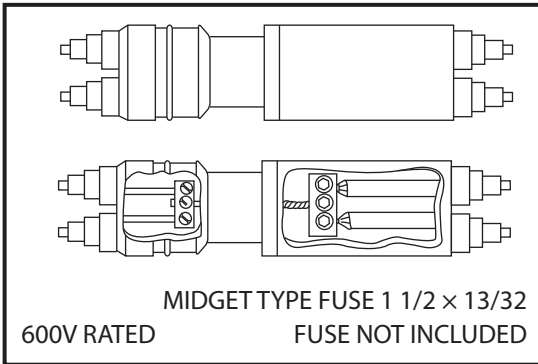


THIS KIT CONTAINS:

- 1 Y-Type Insert & Housing (Line Side).
- 1 Connecting Link (Disconnect Kits Only).
- 1 Load End Insert with Connector.
- 1 Load End Twin Cap.
- 2 Containers of Silicone Grease.

CAUTION
Identify load side wire and assemble per instructions.





- 1** Select correct cut-off rings on Load end housing for cable being used. Cut off end of housing at the tip of arrow, leaving correct cable size showing.

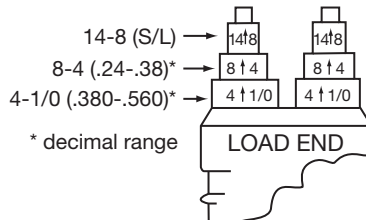


- 2** Wipe cable clean. On larger size cables, Bevel the end of cable insulation for ease of installation. Apply silicone grease to end of cable and to cut opening of load end housing.



- 3** Insert cables until they extend 2" to 3" beyond the housing.

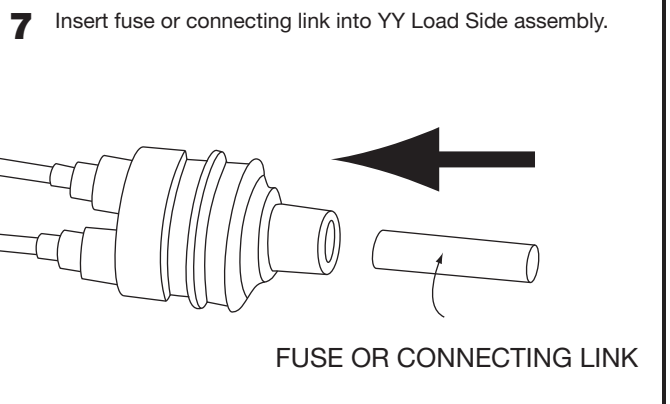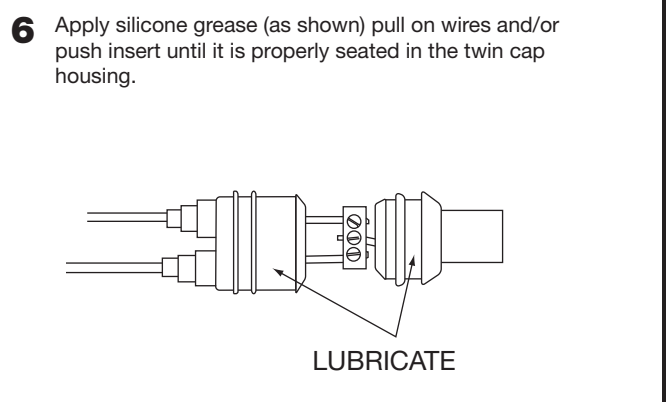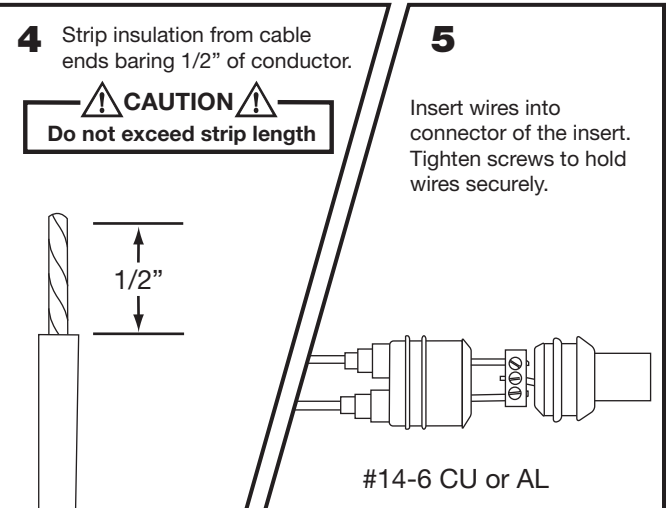

8 FOR RUN CONNECTIONS: (LINE SIDE-TWIN HOUSING)

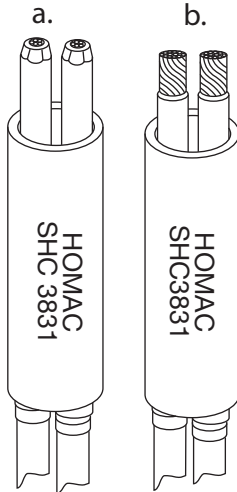


Select correct cut-off ring for cable being used.

a. Cut and pencil cable insulation. Apply silicone grease to end of cable and to cut opening of housing. Slide cable through till it extends 2" to 3" beyond the housing.


b. Bare insulation 1/2".



9 Use 1/8" hex wrench.



10

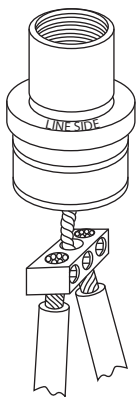

Insert cables as shown in illustration. Tighten to minimum of 30" lbs using 1/8" hex wrench.


#14-4 CU, #14-2 AL

11

LUBRICATE

Assemble insert in Y-Type housing:


- Lubricate with silicone grease.
- Slide housing up to bottom of insert.
- Push insert into opening of housing.
- Pulling on cables while holding onto housing, slide it toward insert.
- Push insert till seated in housing.

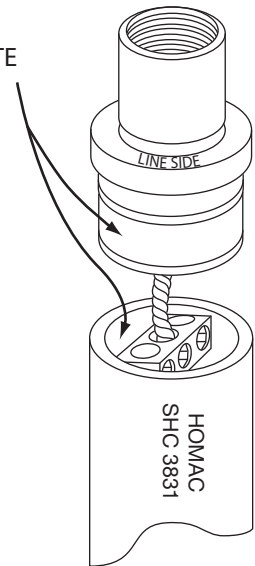

12

Lubricate male and female components with supplied silicone grease.

LUBRICATE

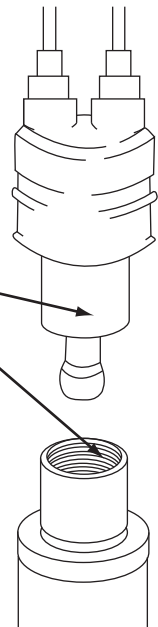

WARRANTY: Thomas & Betts sells this product with the understanding that the user will perform all necessary tests to determine the suitability of this product for the user's intended application. Thomas & Betts warrants that this product will be free from defects in materials and workmanship for a period of two (2) years following the date of purchase. Upon prompt notification of any warranted defect, Thomas & Betts will, at its option, repair or replace the defective product or refund the purchase price. Proof of purchase is required. Misuse or unauthorized modification of the product voids all warranties.

Limitations and Exclusions: THE ABOVE WARRANTY IS THE SOLE WARRANTY CONCERNING THIS PRODUCT, AND IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE SPECIFICALLY DISCLAIMED. LIABILITY FOR BREACH OF THE ABOVE WARRANTY IS LIMITED TO COST OF REPAIR OR REPLACEMENT OF THE PRODUCT, AND UNDER NO CIRCUMSTANCES WILL THOMAS & BETTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Thomas & Betts Corporation
Memphis, Tennessee
www.tnb.com