

Issue Date: 10/25/2012

Page: 1 of 2

File: PSS-K675RTP

15/25kV	900A Deadbreak Reducing Tap Plug	K675RTP
---------	----------------------------------	---------



Features:

- Fully rated 15/25kV, 900 Amp Deadbreak Reducing Tap Plug
- Includes 200 Amp Deadbreak Interface
- Includes Bail Tabs

K675RTP Reducing Tap Plug

Applications:

The 15/25kV K675RTP permits a 200 A deadbreak tap-off of a 900A connector. The K675RTP 200A tap accepts Elastimold K150T connectors, K151SR straight receptacles and 156LR elbows. For assembly, a 600SW spanner wrench is required.

Ratings:

Meets ANSI/IEEE Standard 386, Latest Revision

For 15kV Voltage Class:

8.3kV Max Phase-to-Ground – Operating Voltage
14.4kV Max Phase-to-Phase
95kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
34kV AC – One minute withstand
53kV DC – 15 minutes withstand
11kV AC – Corona Extinction @ 3pC sensitivity
900 Amp – Continuous
25kA Sym – 10 Cycles Momentary

For 28kV Voltage Class:


16.2kV Max Phase-to-Ground – Operating Voltage
28kV Max Phase-to-Phase
140kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
45kV AC – One minute withstand
84kV DC – 15 minutes withstand
21.5kV AC – Corona Extinction @ 3pC sensitivity
900 Amp – Continuous
25kA Sym – 10 Cycles Momentary

Issue Date: 10/25/2012

Page: 2 of 2

File: PSS-K675RTP

15/25kV	900A Deadbreak Reducing Tap Plug	K675RTP
---------	----------------------------------	---------

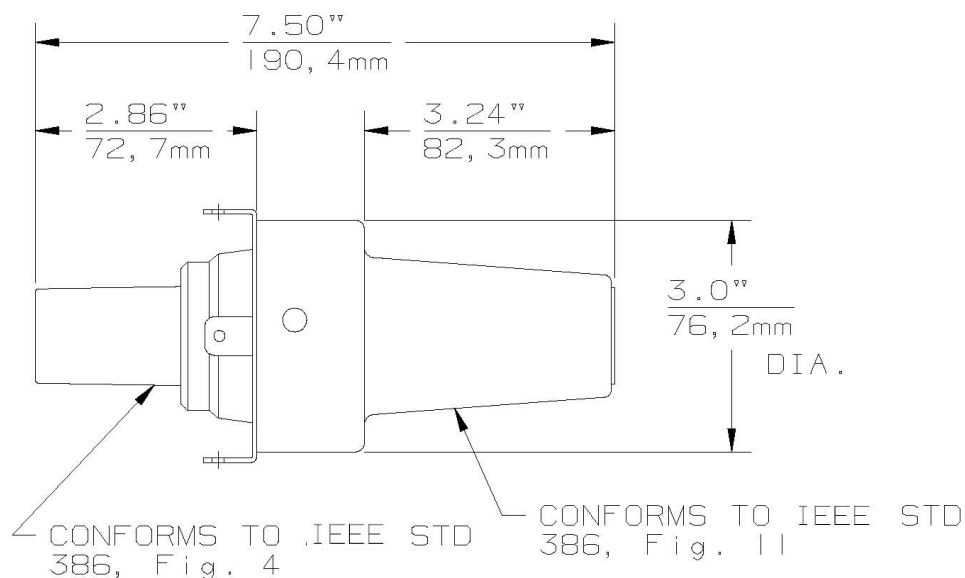

Ordering Instructions:

To order 15/25kV, 900A reducing tap plug, specify **K675RTP**.

Each kit contains the following:

- | | | |
|---|--------------------------|---------|
| 1 | Reducing Tap Plug | K675RTP |
| 1 | Tube, lubricant | 82-08 |
| 1 | Installation Instruction | IS-0230 |

Example:

The ordering number for a 900 Amp insulating plug is K675RTP.