

Issue Date: 10/04/2012

Page: 1 of 2

File: PSS-K675BEA2

25kV	900/200A Stick Op Loadbreak Bushing Adapter	K675BEA2
------	---	----------



Features:

- 25kV Tap, 200 Amp Rated Loadbreak Bushing Adapter
- Includes hex-broach for torque installation
- Peroxide-cured insulation and jacket
- All copper current path
- Constructed of EPDM molded rubber
- Converts a 675 Series Bushing Interface to a 200 Amp Loadbreak Interface

K675BEA2 Stick Op Loadbreak Bushing Adapter

Applications:

The Elastimold K675BEA2 Loadbreak bushing adapter is constructed of EPDM molded rubber and is used in conjunction with the Elastimold stick operable 900 Amp deadbreak connector system. The unit mates with a 900 Amp bushing interface and provides a 200 Amp loadbreak tap, an access hole thru the bore of the reducing tap plug allows use of a 600AT operating tool to bolt and secure the component to a mating 900 Amp bushing apparatus. The following Elastimold products are used with the K675BEA2:

- K675LB

Ratings:

Meets ANSI/IEEE Standard 386, Latest Revision

For 25kV Voltage Class:


16.2kV Max Phase-to-Ground – Operating Voltage
 28kV Max Phase-to-Phase
 140kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
 45kV AC – One minute withstand
 84kV DC – 15 minutes withstand
 21.5kV AC – Corona Extinction @ 3pC sensitivity
 200 Amp – Continuous and Loadbreak
 10kA Sym – 10 Cycles Momentary & Fault Close

Issue Date: 10/04/2012

Page: 2 of 2

File: PSS-K675BEA2

25kV	900/200A Stick-Op Loadbreak Bushing Adapter	K675BEA2
------	--	----------

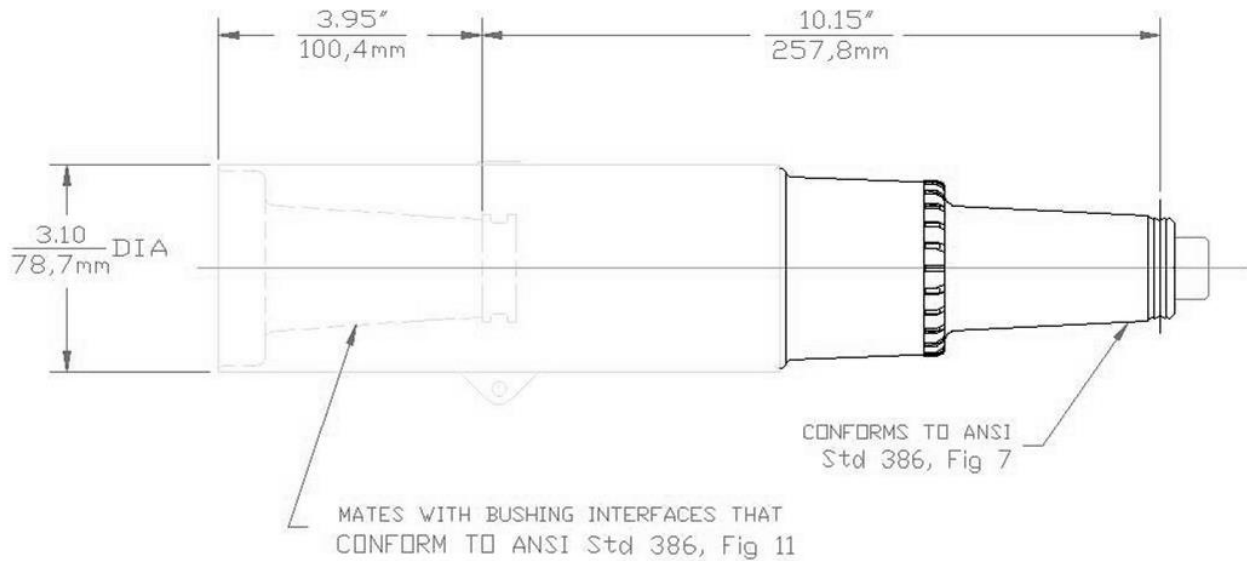

Ordering Instructions:

To order, specify number **K675BEA2** loadbreak bushing adapter.

Each kit contains the following:

- | | | |
|---|--------------------------|----------|
| 1 | Bushing Adapter | K675BEA2 |
| 2 | Lubricant | 82-08 |
| 1 | Installation Instruction | IS-0174 |

Notes:

- 600AT Assembly Tool required for operation and/or installation of Stick-Op device