

35kV	900/200A Loadbreak Elbow Tap Plug	775ETP
------	-----------------------------------	--------



Features:

- 35kV Tap, 200 Amp Loadbreak Rated Elbow Tap Plug
- Includes hex-broach for torque in installation
- Peroxide-cured insulation and jacket
- Loadbreak interface is designed for energized operation
- Rated for single phase application only
- Vents that eliminate partial vacuum

775ETP Loadbreak Elbow Tap Plug

Applications:

The Elastimold® 35kV 775ETP elbow tap plug permits a 200 Amp tap off of a mating 900 Amp connector. The 775ETP is installed with a 600ATM assembly tool.

The Elastimold® 775ETP mates with the following products (along with their test point models):

- 755BLR
- 755BE
- 375DRG
- 376DRG
- 375ESA-XX
- 375LR
- 370GLR

Ratings:

Meets ANSI/IEEE Standard 386, Latest Revision

For 35kV Voltage Class 1Ø Only:

21.1kV Max Phase-to-Ground – Operating Voltage
36.6kV Max Phase-to-Phase
150kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
50kV AC – One minute withstand
103kV DC – 15 minutes withstand
26kV AC – Corona Extinction @ 3pC sensitivity

200 A Loadbreak Interface

200 Amp – Continuous and Loadbreak
10kA Sym – 10 Cycles Momentary

900 A Deadbreak Interface


900 Amp – Continuous
25kA Sym – 10 Cycles Momentary

Issue Date: 3/21/2013

Page: 2 of 2

File: PSS-775ETP

35kV	900/200A Loadbreak Elbow Tap Plug	775ETP
------	-----------------------------------	--------

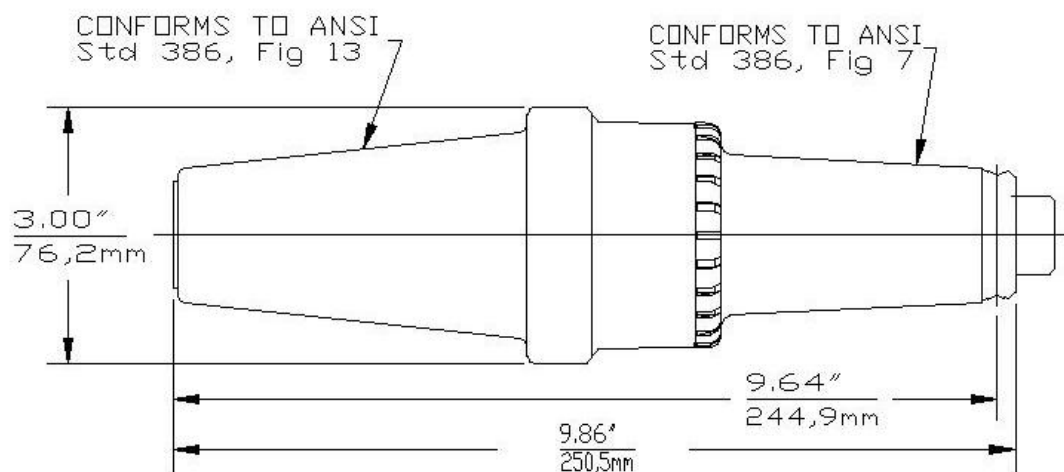

Ordering Instructions:

To order, specify number **775ETP** loadbreak elbow tap plug.

Each kit contains the following:

1	Elbow Tap Plug	775ETP
1	Protective shipping cap	2701-41
2	Lubricant	82-08
1	Installation Instruction	IS-1155

Notes:

- Available with stud factory-assembled by adding "SP" to the part number.
- Available with a loose stud by adding suffix "S" to the part number.
- Use 600ATM assembly tool.