

Shrink-Kon

PRODUCT REFERENCE:

TBM XXXX

TBM=RATED
FOR 600V,
90°C
CONTINUOUS USE
EXPANDED
DIAMETER
CHART AS
SUPPLIED
IN 1/10
INCH

COLOR

COLOR
BLACK ONLY

EXAMPLE: TBM0400

NOTES:

1. ALL PRODUCTS SHALL BE RoHS COMPLIANCE.
2. STANDARD COLOR: BLACK.
3. PACKAGING: "TBM" PRODUCTS ARE PACKED IN POLY BAG.

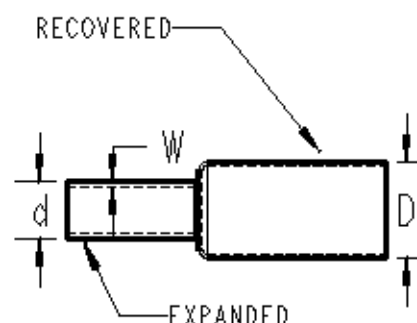


ABB PRODUCT REF.	EXPANDED DIA. AS SUPPLIED: (D)		DIA.: (d)	WALL THICKNESS AFTER SHRINKING	LENGT H PER BAG	QUANTITY PER BAG
	[inch]	[mm]	[mm]	[mm]	[m]	[PIECES 1.22m]
TBM0400	2/5"	10.2	3.8	2.0	6.1	5
TBM0750	3/4	19.1	5.6	2.0	6.1	5
TBM0950	19/20"	25.0	8.0	2.0	3.6	3
TBM1100	1-1/10	27.9	10.2	2.0	3.6	3
TBM1500	1-1/2"	38.1	12.7	2.0	2.4	2
TBM2050	2-1/2"	52.1	19.1	2.0	1.2	1
TBM2750	2-3/4"	69.9	25.4	2.0	1.2	1
TBM3500	3-1/2"	88.9	30.0	2.4	1.2	1
TBM4700	4-7/10	119.4	39.9	2.7	1.2	1
TBM6700	6-7/10	170.2	58.4	2.8	1.2	1
TBM9000	9	228.6	77.0	3.0	1.2	1

MATERIAL	CROSSLINKED POLYOLEFIN WITH THERMOPLASTIC ADHESIVE LINER
SHRINK RATIO	3:1
RoHS FOR ALL COLORS	YES
TUBE TYPE	DUAL WALL
TEMP. RANGE	-55°C TO +110°C
SHRINKING TEMP.	+120°C
WALL THICKNESS	MEDIUM
IP RATING	IP67
STANDARD COLOR	BLACK

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

** SEE ERN (****)
FOR APPROVAL SIGNATURES
& RELEASE DATE.
PROJECT NO: ****

www.tnb.com

Thomas & Betts
A Member of the ABB Group

DESCRIPTION: **MEDIUM WALL SHRINK TUBING "TBM"**
FOR ABB GLOBAL LESS NORTH AMERICA

ORIGINAL PROJECT NO / (ERN NO)

017P000624 / (2016681)

SHEET NO:

1 OF 1

REV. NO:

**

DRAWING NO:

WSD-001482

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY, AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON.
COPYRIGHT THOMAS & BETTS CORPORATION. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL.