

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS – in. [mm]				
		A ± .02 [0,5]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .02 [0,5]	H ± .01 [0,3]
P14-6RHT6	#6	.62 [15,75]	.25 [6,35]	.20 [5,08]	.50 [12,70]	.15 [3,81]
P14-8RHT6	#8	.71 [18,03]	.31 [7,87]	.25 [6,35]	.55 [13,97]	.17 [4,32]
P14-10RHT6	#10	.71 [18,03]	.31 [7,87]	.25 [6,35]	.55 [13,97]	.20 [5,08]

UL TOOLS

CT-100B - #16-14 AWG
CT-1570 - #18-14 AWG
CT-2300 - #18-14 AWG
CT-2500 (CT-2570CH) -
#18-14 AWG

METRIC EQUIVALENT


#18 AWG	= 1,0 mm ²
#16 AWG	= 1,5 mm ²
#14 AWG	= 2,5 mm ²

NOTES:


1. UL 486A/B LISTED FOR
 - A. SOLID OR STRANDED WIRE.
 - B. 650F [343 C] MAXIMUM TEMPERATURE RATING
 - C. 600V MAX BLDG WIRE
(1000V MAX IN SIGNS, FIXTURES & LUMINARIES)
 - D SOME TOOLS HAVE EXPANDED WIRE SIZES. SEE TOOL
TABLES FOR AWG WIRE SIZES SUPPORTED BY EACH TOOL.
2. SEE www.panduit.com FOR PACKAGE QUANTITIES.
3. .MATERIAL:
 - A. STAMPING - .032" [0,8] THICK COPPER, NICKEL PLATED
4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT.
5. WIRE STRIP LENGTH: 9/32" +1/32 -0 [7,1mm +0.8 -0]



LISTED
587H
F52164

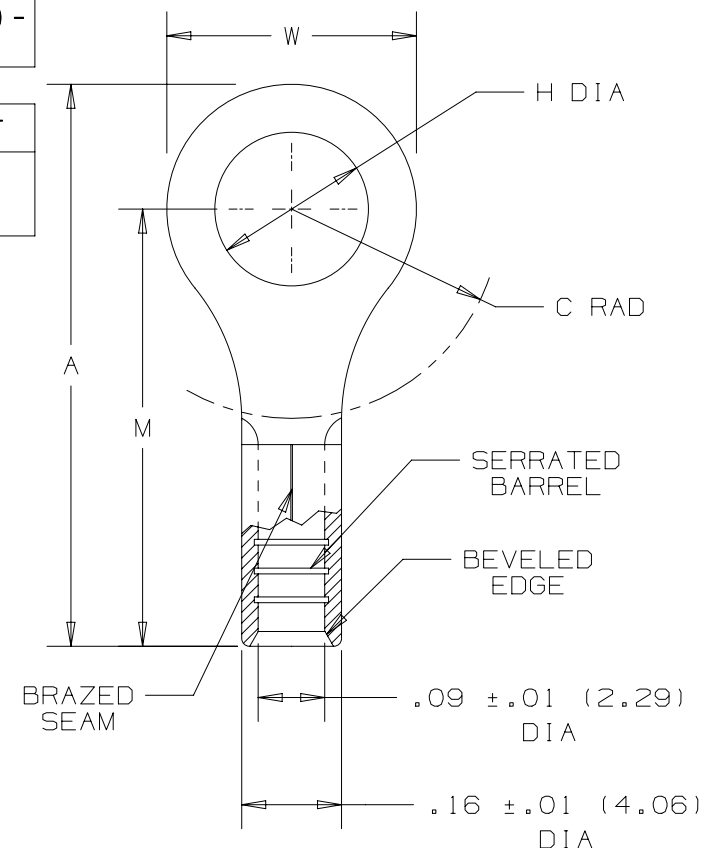

09A	3-25-26	ANVM	ANVM	JSUN	CORRECTED NOTE 3.A. WAS TIN PLATED.	010191/01
08A	01-20-25	DPOI	ACC	JSUN	ADDED METRIC EQUIVALENT CHART. MODIFY NOTES & GAUGE RANGE.	010191/00
07	5/17	JHNU	TMR	RGB	UPDATED TOOL CHART FORMAT	N41266BA-A41266
06	06/14	MBY	JHNU	RGB	ADDED cULus LOGO, REVISED NOTES, MOVED TOOLS TO TABLE, UPDATED BORDER	N41266BA-A41266
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE				
#16-14 BARREL NON-INSULATED RING TONGUE, HIGH TEMPERATURE, 650° F				
CUSTOMER DRAWING				
ITEM REVISION NAME		N41266BA/09 		
DATASET FILE NAME		N41266BA/09		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:		
.X ± .XXX ± .XX ± ANGLES ±		SEE NOTE 3		
		THIRD ANGLE PROJECTION		
DRAWING NUMBER:		A41266		
DRAWN BY	DATE	CHK	SCALE	SIZE
DAW			NONE	SHT 1 OF 1
				A