


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]
PN14-6R-3K	#6	M3,5	.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.15 [3,8]
PN14-8R-3K	#8	M4	.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.17 [4,3]
PN14-10R-3K	#10	--	.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]
PN14-14R-3K	1/4"	M6	1.06 [26,9]	.44 [11,2]	.38 [9,7]	.83 [21,1]	.27 [6,9]

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- DIMENSIONS IN [] ARE METRIC.
- WEIGHT: .002 TO .004 Lbs.
- PART INCLUDES:
 - STAMPING: .03" [0,8] THK COPPER, TIN PLATED
 - HOUSING: NYLON, BLUE
 - SLEEVE: BRASS, TIN PLATED
- UL LISTED AND CSA CERTIFIED FOR:
 - #16-14 AWG [1,5-2,5 mm²] SOLID OR STRANDED COPPER WIRE.
 - 221°F [105°C] MAX. OPERATING TEMPERATURE.
 - 600 V. MAX. VOLTAGE RATING
- WIRE STRIP LENGTH:

1/4	+1/32	[6,4	+0,8
	-0	-0	
- INSTALLATION TOOLS:
 - PRESSES: CP-861, CP-862, CP-871
 - APPLICATOR: CA-800EZ, CA9
 - DIE INSERTS: CD-800-2, CD9-2A, CD9-2B

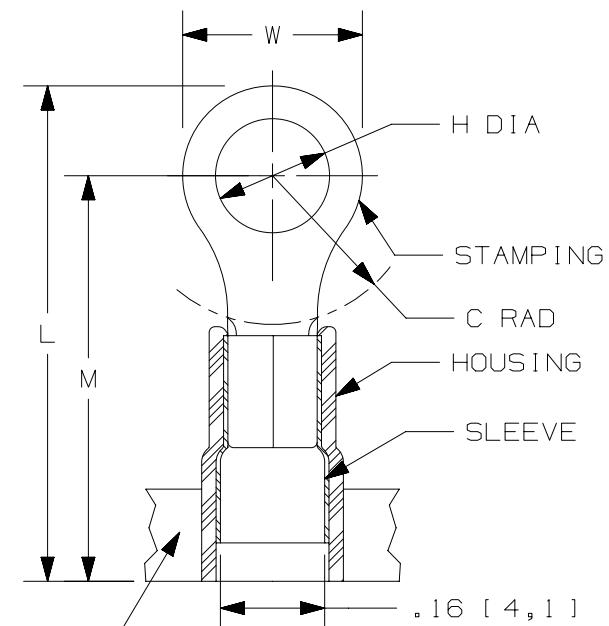


CARRIER STRIP
(CONFIGURATION
MAY VARY)


.16 [4,1]
MAX. WIRE
INSUL. DIA.



LISTED
587H
E52164

CERTIFIED
LR31212



PART NUMBER		SEE CHART	
TITLE		RING TERMINALS, 3 PC. NYLON INSULATED, #16-14	
ITEM REVISION NAME		CUSTOMER DRAWING	
N41099BA/08			
DATASET FILE NAME			
N41099BA-DC r08A			
		THIRD ANGLE PROJECTION	
MATERIAL		DRAWING NUMBER	
SEE NOTES		A41099	
DRAWN BY	DATE	CHK	SCALE
JMV	09-12-12	LA	N.T.S.
SHEET 1 OF 1			SIZE
			A