

2

1


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MATERIAL	HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
PLATING	ELECTRO-TIN
WIRE SIZE	6 AWG
WIRE TYPE	STRANDED COPPER; CLASS B: COMPACT, COMPRESSED OR CONCENTRIC, CLASS C: CONCENTRIC
WIRE STRIP LENGTH	1-1/8 IN.
STUD SIZE	1/4 IN.
UL LISTED WIRE CONNECTOR	YES, FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
UL TEMPERATURE RATING	90° C
CSA CERTIFIED WIRE CONNECTOR	YES
PANDUIT COLOR CODE ON BARREL	BLUE
PANDUIT DIE INDEX NO. ON BARREL	P24
ALTERNATE INDUSTRY DIE INDEX NO. () ON BARREL	(7)

DIMENSIONS IN BRACKETS ARE MILLIMETERS

LISTED
WIRE CONNECTOR

CERTIFIED

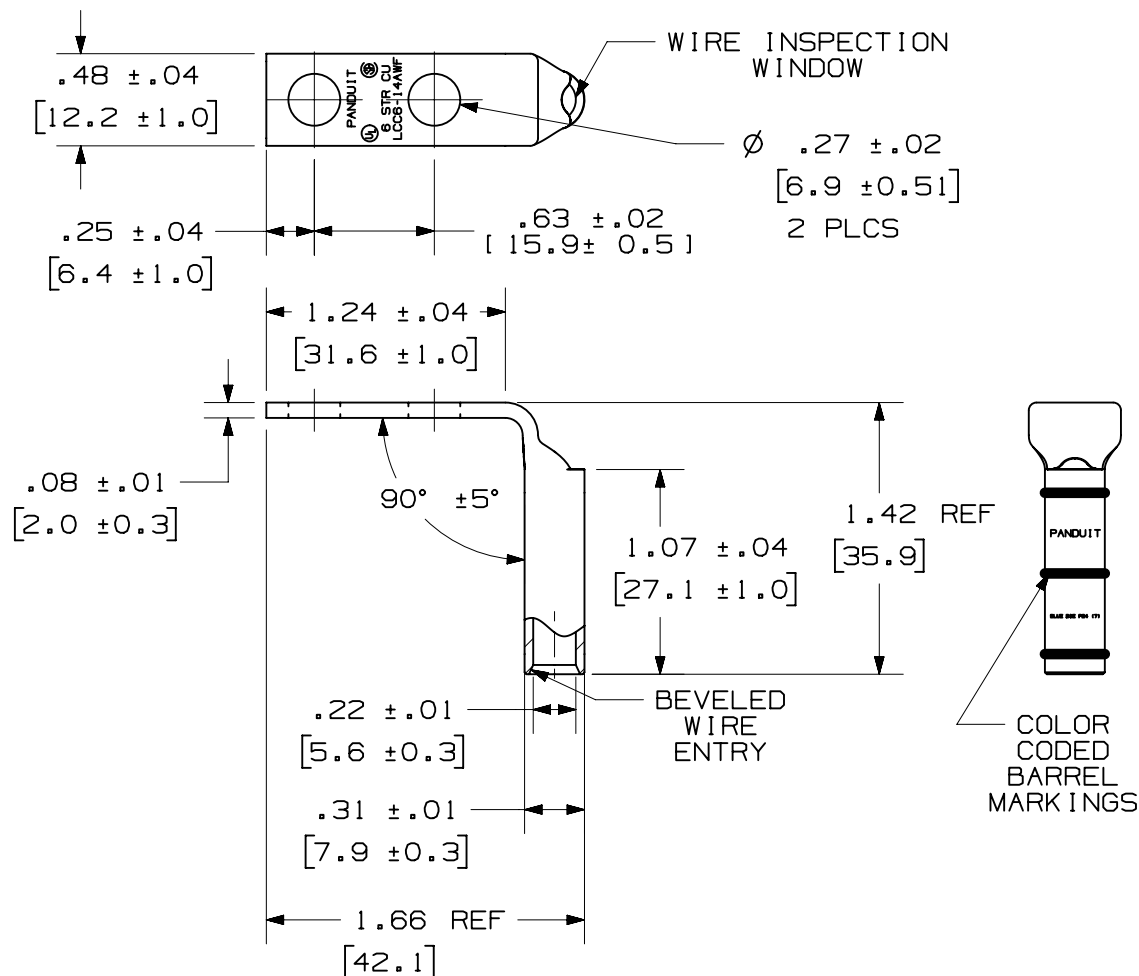

PART NUMBER		LCC6-14AWF-L	
TITLE		COPPER LUG - TWO HOLE, LONG BARREL WITH WINDOW, 90° ANGLE TONGUE	
CUSTOMER DRAWING			
ITEM REVISION NAME		N10884B0/00	
DATASET FILE NAME		N10884B0/00A	
THIRD ANGLE PROJECTION		PANDUIT	
MATERIAL		SEE TABLE	
DRAWING NUMBER		N10884B0-DC	
DRAWN BY	DATE	CHK	SCALE
SAB	DRL	9-02	NONE
SHEET 1 OF 1			SIZE
			A

2

1

B

B

←

→

A

A

A-SIZE CUSTOMER

00A	10-16-24	JHNU	JHNU	MRWA	D. REVISED STAMP LOCATION TO MIDDLE OF TONGUE C. REVISED TO SHOW 3 BARREL MARKING LINES B. REVISED DRAWING NUMBER: N10884B0-DC WAS LCC6-14AWF-CUST A. CONVERTED TO NX	006540
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN