


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	4 STR/FLEX (ALL), 3 & 5 FLEX*
Wire Type	Stranded Copper: Class B & C, Compact, Class G, H, I, K, M, Locomotive (*Locomotive only)
Wire Strip Length	5/8 in.
Stud Size	3/8 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	GRAY
Panduit Die Index No. on Barrel	P29
Alternate Industry Die Index No. () on Barrel	(8)



Technical drawing of a Panduit 4 STR/FLEX LCDX4-38DF cable. The drawing shows a side view of the cable with two circular features (likely strain relief or mounting points) and a "Wire inspection window" at the end. Dimensions are provided: overall width is $.62 \pm .04$; distance from left edge to first circular feature is $.36 \pm .04$; distance between the two circular features is $1.00 \pm .02$; and the diameter of the circular features is $.41 \pm .02$ DIA. The text "PANDUIT 4 STR/FLEX LCDX4-38DF" is printed on the cable body. A note "(2) PLS" is at the bottom right.

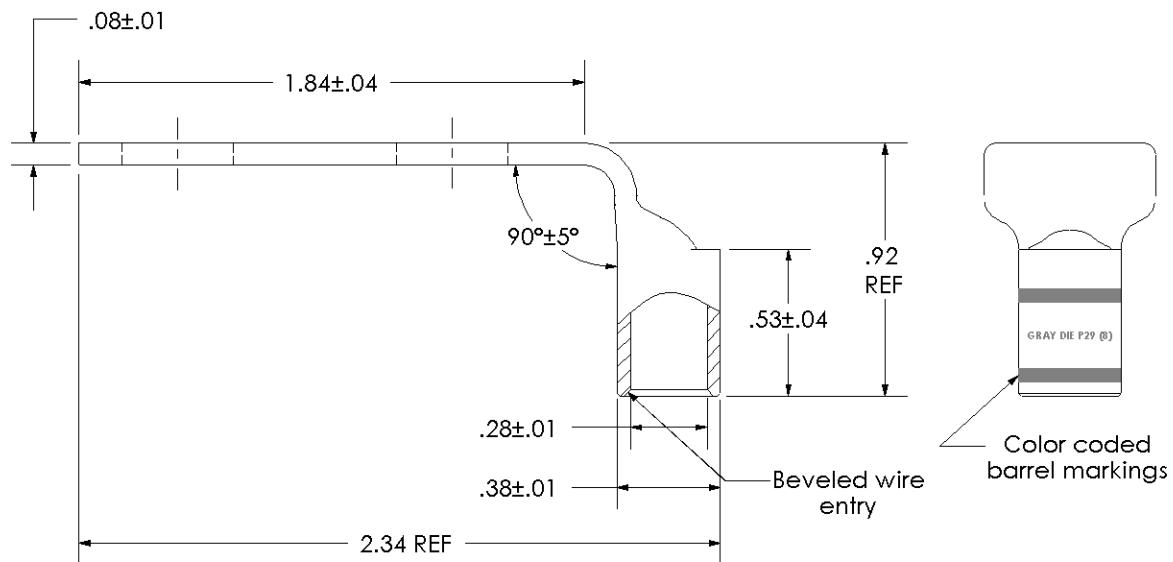

						 PANDUIT CORP. TINLEY PARK, ILLINOIS	
						LCDX4-38DF-L Copper Lug - Two-Hole, Standard Flex Barrel, 90° Angle Tongue	
01	3/04	KLFU	TLCO	WIRE SIZE WAS: 4 STR/FLEX ADDED 3 & 5 FLEX, LOCOMOTIVE ONLY * NOTE	11610		
REV	DATE	BY	CHK	DESCRIPTION	ECN	SCALE N/A	DRAWING NO / CAD FILE LCDX4-38DF-CUST