


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- 1) DIMENSIONS IN [] ARE MILLIMETERS
- 2) SOLID ALUMINUM BODY WITH STEEL SHACKLE
- 3) LOCK BODY PROTECTED BY COLORED VINYL COVER
- 4) SHACKLE PROTECTED BY BLACK POLYETHYLENE SHEATH
- 5) 6-PIN CYLINDER
- 6) KEY RETAINING
- 7) AVAILABLE WITH CUSTOM KEYING USING OUR CUSTOM ORDER FORM.
- 8) NON-CONDUCTIVE
- 9) OPERATING TEMPERATURE -40°C TO 85°C.

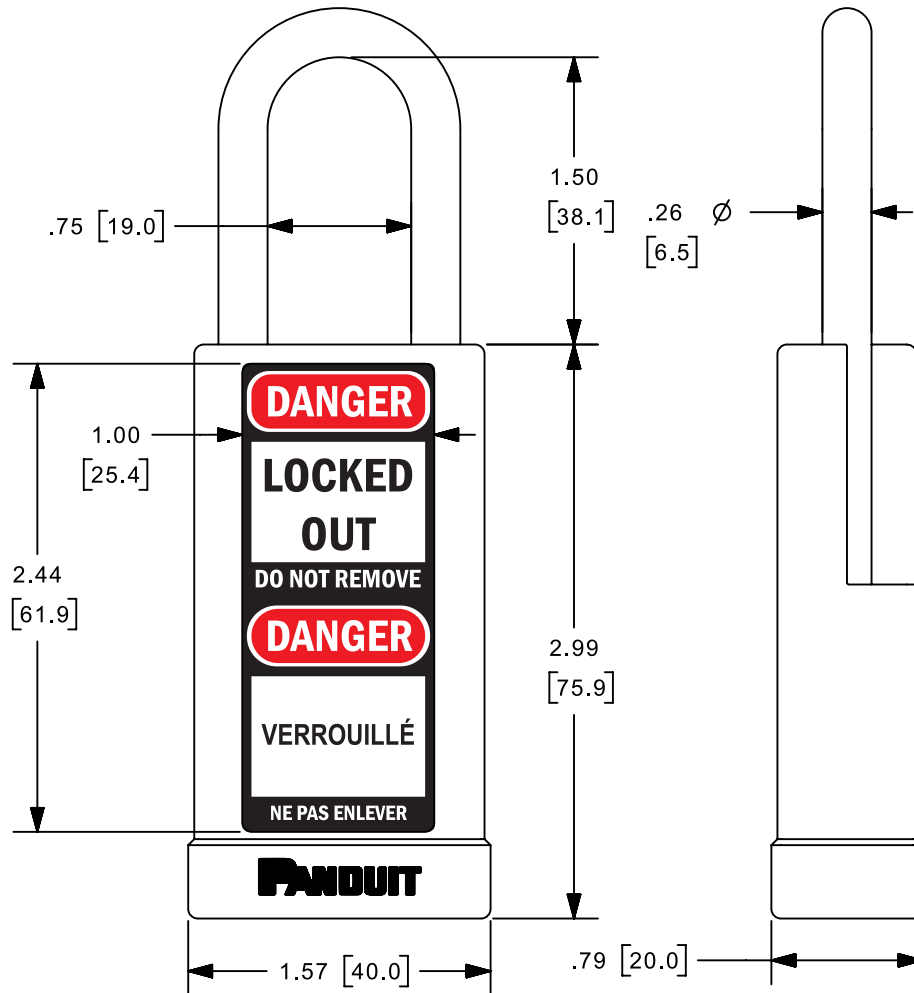

B

PART NUMBER	BODY COLOR
PSL-8-LB	RED

C

A


B

A

A

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	5/1/2026	RVU	MSAD	MSAD	D. OBSOLETE ALL PN EXCEPT PSL-8-LB. C. REMOVED NOTE 7 EXCEPT PSL-8-LB & REORDERED NOTES. B. ADDED PSL-8-LB, RED TO NEW TABLE. A. REMOVED "AND ENGRAVING" FROM NOTE 8.	GAECN07607
00A	11/5/12	RVU	MJPF	MSAD	DRAWING RELEASE	GAECN00389

TITLE									
PSL-8-LB LONG BODY SAFETY PADLOCK									
CUSTOMER DRAWING									
ITEM REVISION NAME									
I00923DT/02									
DATASET FILE NAME					MATERIAL: SEE NOTE 2, 3 & 4				
I00923DT_DC/02A C11033 CUST DWG									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .150 [3.81] .xxx ± .031 [0.787] .xx ± .10 [2.54] ANGLES ± 5 °									
					THIRD ANGLE PROJECTION				
DRAWN BY		DATE		CHK		SCALE		DRAWING NUMBER:	
RVU		11/5/12		MSAD		NTS		C11033	
								SIZE	
SHT 1 OF 1								A	

2

1

21/10100DA/12