


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MATERIAL	HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
PLATING	ELECTRO-TIN
WIRE SIZE	8 AWG
WIRE TYPE	STRANDED COPPER; CLASS B: COMPACT, COMPRESSED OR CONCENTRIC, CLASS C: CONCENTRIC
WIRE STRIP LENGTH	5/8 IN
STUD SIZE	1/4 IN.
UL LISTED WIRE CONNECTOR	YES, FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
UL TEMPERATURE RATING	90° C
CSA CERTIFIED WIRE CONNECTOR	YES
PANDUIT COLOR CODE ON BARREL	RED
PANDUIT DIE INDEX NO. ON BARREL	P21
ALTERNATE INDUSTRY DIE INDEX NO. () ON BARREL	N/A

DIMENSIONS IN BRACKETS ARE MILLIMETERS

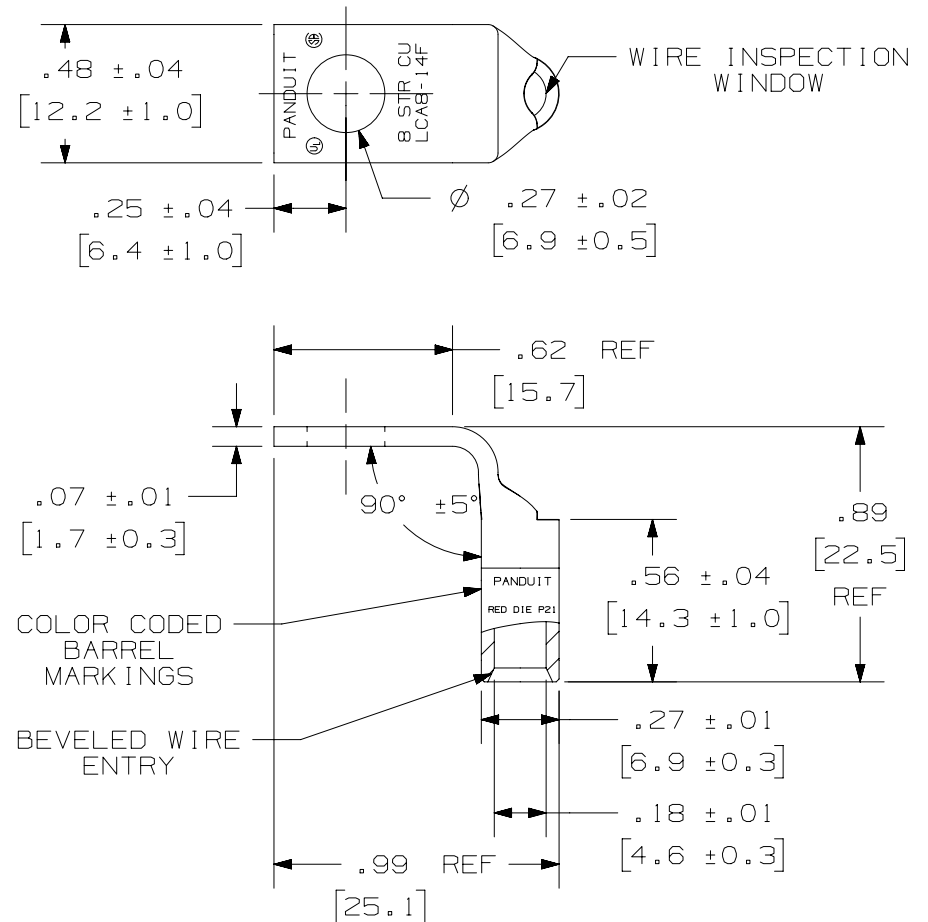

PART NUMBER		LCA8-14F-L	
TITLE		COPPER LUG - ONE HOLE, STANDARD BARREL 90° ANGLE TONGUE	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		N10881HN-DC/00A	
THIRD ANGLE PROJECTION		PANDUIT	
MATERIAL		SEE TABLE	
DRAWING NUMBER		N10881HN-DC	
DRAWN BY	DATE	CHK	SCALE
DRL	9-03	JAC	NONE
SHEET 1 OF 1			SIZE
			A

00A	2-13-25	JHNU	JHNU	JSUN	C. REVISED TONGUE LENGTH DIMENSION TO REFERENCE B. REVISED DWG NUMBER: N10881HN-DC WAS LCA8-14F-CUST A. CONVERTED TO NX	011114
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN