

2


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MATERIAL	HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
PLATING	ELECTRO-TIN
WIRE SIZE	6 AWG
WIRE TYPE	STRANDED COPPER; CLASS B: COMPACT, COMPRESSED OR CONCENTRIC, CLASS C: CONCENTRIC
WIRE STRIP LENGTH	7/8 IN
STUD SIZE	1/4 IN.
UL LISTED WIRE CONNECTOR	YES, FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
UL TEMPERATURE RATING	90° C
CSA CERTIFIED WIRE CONNECTOR	YES
PANDUIT COLOR CODE ON BARREL	BLUE
PANDUIT DIE INDEX NO. ON BARREL	P24
ALTERNATE INDUSTRY DIE INDEX NO. () ON BARREL	(7)

DIMENSIONS IN BRACKETS ARE MILLIMETERS



1

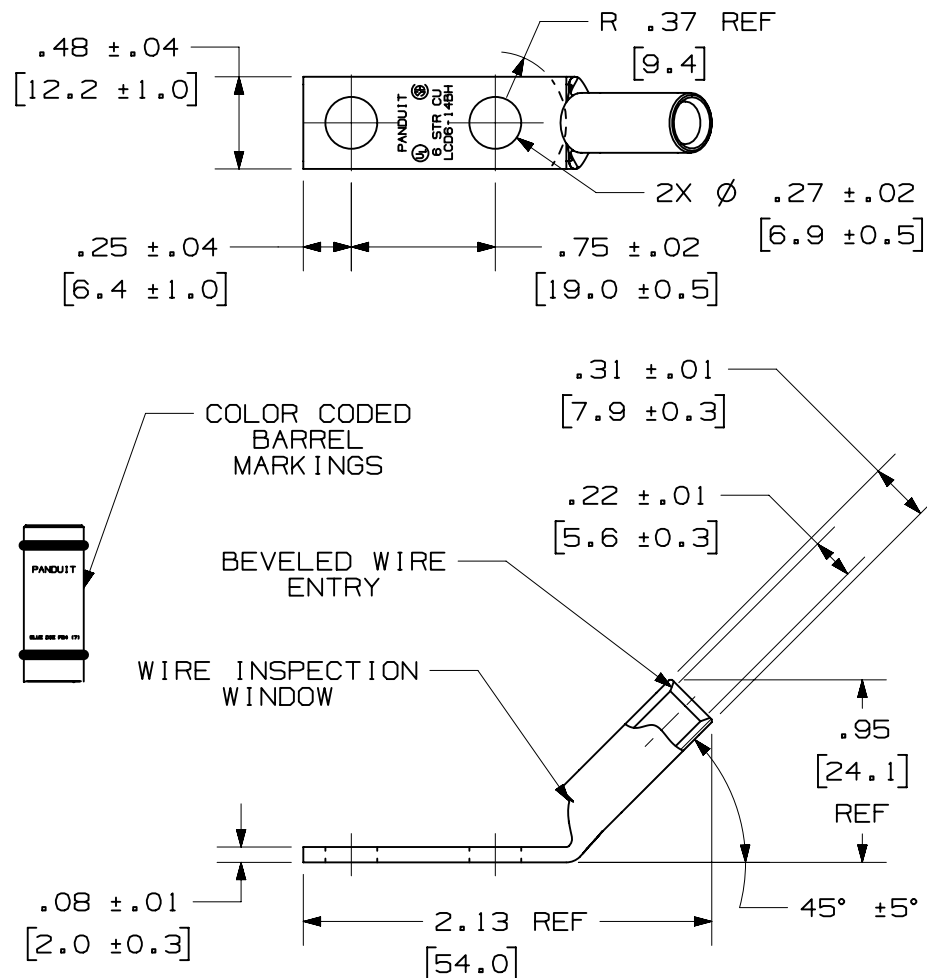

PART NUMBER		LCD6-14BH-L	
TITLE		COPPER LUG - TWO HOLE STANDARD BARREL 45° ANGLE TONGUE	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		N10884VP-DC/03B	
THIRD ANGLE PROJECTION		PANDUIT	
MATERIAL		SEE TABLE	
DRAWING NUMBER		N10884VP-DC	
DRAWN BY		JHNU	
DATE		9-23	
CHK		JHNU	
SCALE		NONE	
SHEET 1 OF 1		A	

2

1

03B	10-30-24	JHNU	JHNU	MRWA	D. REMOVED TONGUE LENGTH DIMENSION	007987
03A	8-23-24	JHNU	JHNU	MRWA	C. ADDED TONGUE LENGTH DIMENSION B. REVISED DRAWING NUMBER: N10884VP-DC WAS LCD6-14BH-CUST A. CONVERTED TO NX	005809
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

B

A

A-SIZE CUSTOMER