


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- 1) DIMENSIONS IN [] ARE MILLIMETERS
- 2) SOLID ALUMINUM BODY WITH STEEL SHACKLE
- 3) LOCK BODY PROTECTED BY COLORED VINYL COVER
- 4) SHACKLE PROTECTED BY BLACK POLYETHYLENE SHEATH
- 5) 6-PIN CYLINDER.
- 6) KEY RETAINING.
- 7) AVAILABLE WITH CUSTOM KEYING USING OUR CUSTOM ORDER FORM.
- 8) NON-CONDUCTIVE
- 9) OPERATING TEMPERATURE -40°C TO 85°C

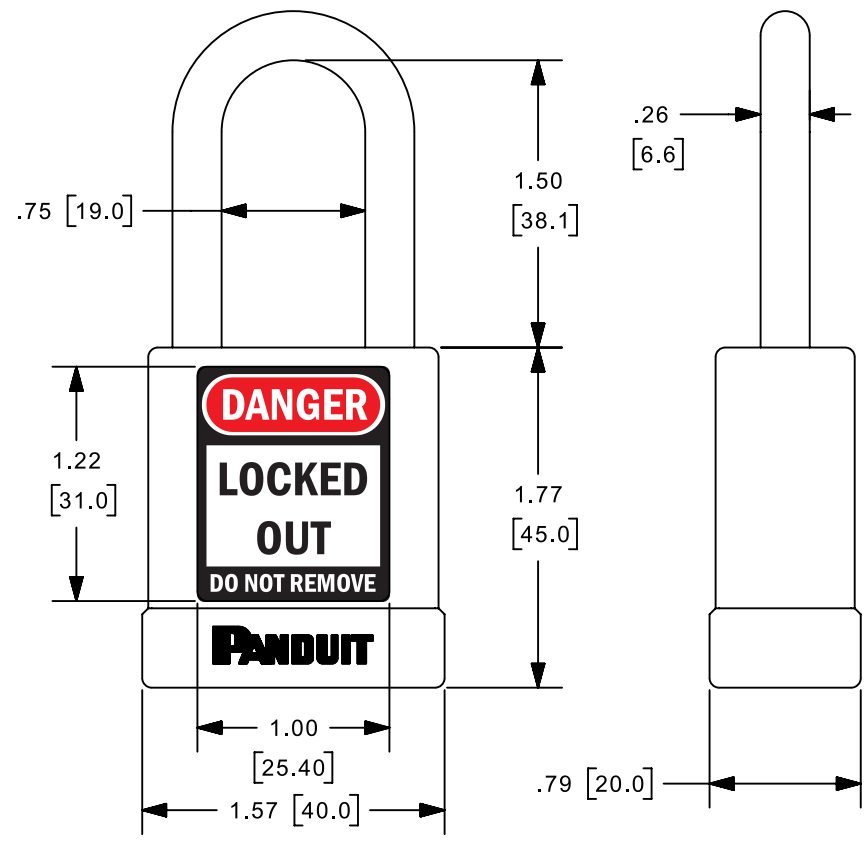

B

PART NUMBER	BODY COLOR
PSL-8	RED
PSL-8YL	YELLOW
PSL-8OR	ORANGE
PSL-8BL	BLACK
PSL-8BU	BLUE
PSL-8GR	GREEN
PSL-8PU	PURPLE
PSL-8BR	BROWN

D

A

B

A

A

A

							PSL-8** NON-CONDUCTIVE SAFETY PADLOCK CUSTOMER DRAWING				
05A	5/1/2026	RVU	MSAD	MSAD	D. REMOVED NOTE 7 & REORDERED NOTES. C. UPDATED TITLE, "NON-CONDUCTIVE SAFETY PADLOCK". B. ADDED PART NUMBERS, PSL-8** TO NEW TABLE. A. REMOVED "AND ENGRAVING" FROM NOTE 8. ADDED "USING OUR CUSTOM ORDER FORM".	GAECN07607	ITEM REVISION NAME				
04	8/27/12	JHAC			CHANGED MATERIAL SECTION TO SEE NOTES 2, 3, & 4.	GAECN00028	100923DA/05				
03	3/31/12	RVU			ADDED PSL-8PU & PSL-8BR TO NOTE 7.	6809	DATASET FILE NAME				
02	4/20/12	JHAC			ADDED NOTES 4, 9 AND 10.	6766	100923DA_DC/05A C10704 CUST DWG				
01	12/02/09	JHAC			CHANGED MM DIMENSIONS.	5919	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				
00	5/14/08	JHAC			DRAWING RELEASE.	5437	.x ± .150 [3.81] .xxx ± .031 [0.787] .xx ± .10 [2.54] ANGLES ± 5 °				
							THIRD ANGLE PROJECTION				
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	
							JHAC	5/14/08	MSAD	1:1	

MATERIAL:				SEE NOTES 2, 3 & 4			
DRAWING NUMBER:				C10704			
SHT 1 OF 1				A			

2

1

D10100DA/20