


B


A

B


A

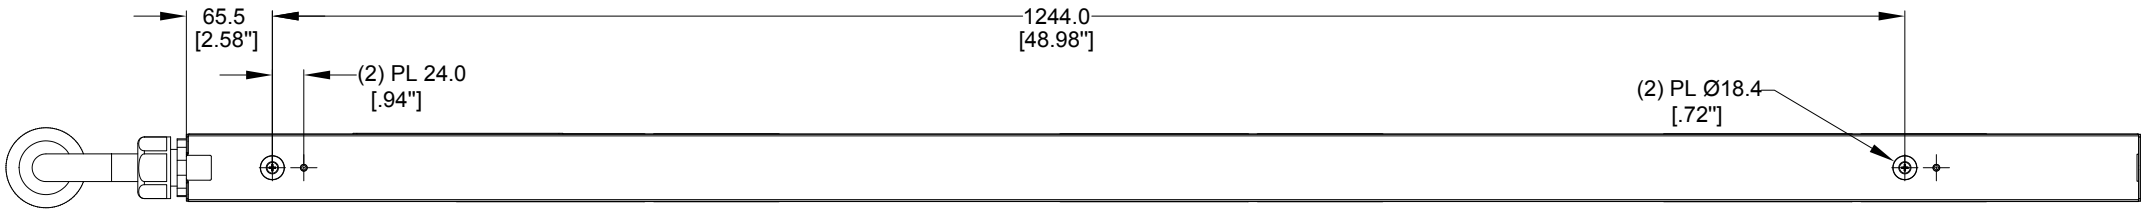

REAR VIEW

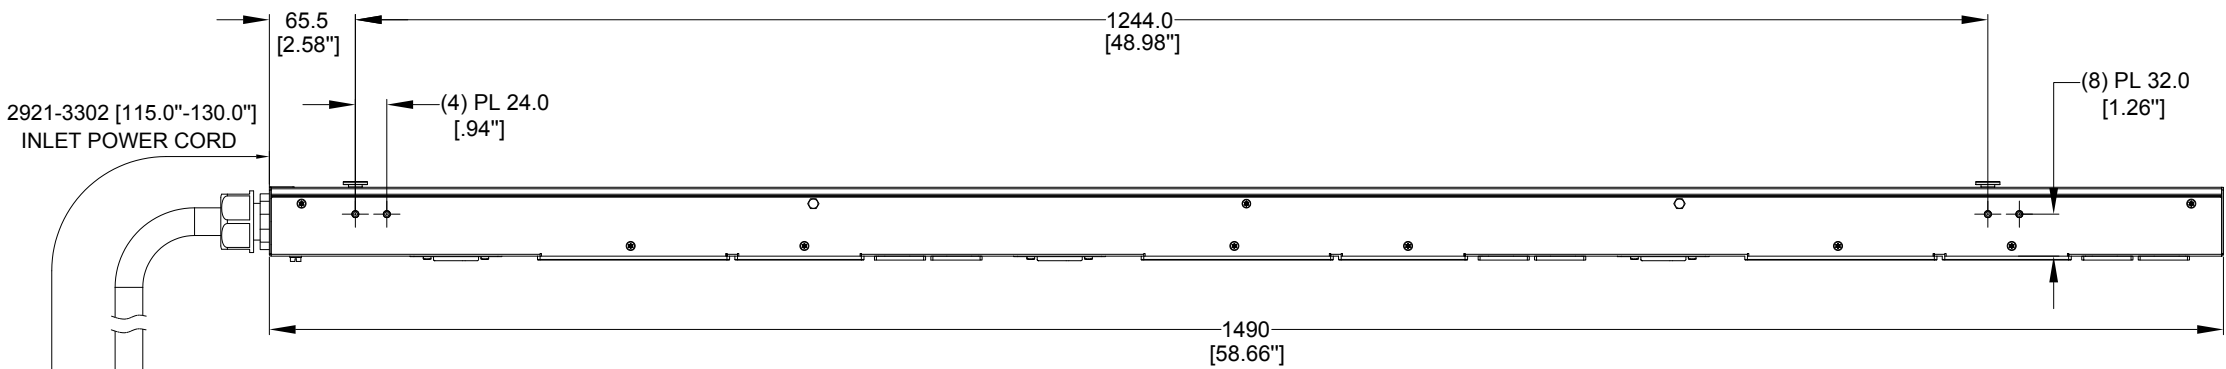


TOP VIEW

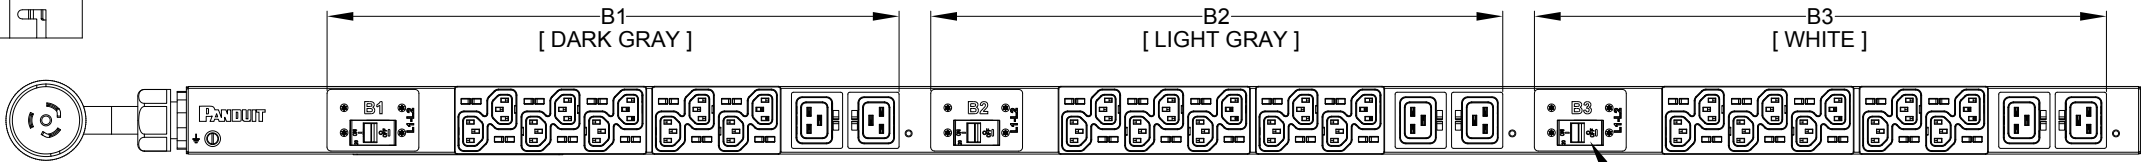

FRONT VIEW

20 AMP, DOUBLE - POLE ELECTRO-MECHANICAL SWITCH / BREAKER (3) PLACES

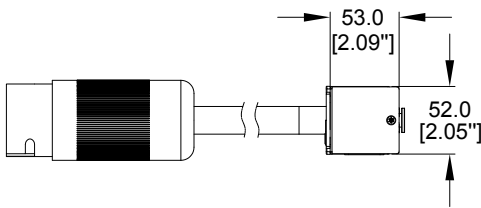

SIDE VIEW

PANDUIT P/N	WEIGHT
P36B18M	6.0kg

NOTES:

1. IDENTIFICATION:
- UNIT TYPE:

ORIENTATION:

OUTLET QTY&TYPE:

BREAKER QTY&TYPE:

INPUT VOLTAGE:

INPUT CURRENT:

INPUT PHASE:

RATED POWER:

INPUT PLUG:

INPUT CORD LENGTH:
- BASIC

VERTICAL, MID

(30) C13, (6) C19

(3) 20A, DOUBLE-POLE

200-240VAC


50A (40A DERATED)

SINGLE PHASE


8.3kVA

HUBBELL CS8265C


3m [10']
2. ACCESSORIES:
- POCKET GUIDE
3. RoHS COMPLIANT
4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 8.3kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES



PLUG
50 AMP, 250V
TWIST LOCK
NEMA CS-8265C




SIX (6)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19

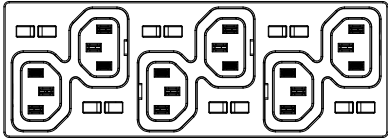

THIRTY (30)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

01B	08/21/2017	KUN	MIM	EDM	REVISED TOLERANCES	P36B18M
01A	06/28/2017	KUN	MIM	EDM	INITIAL RELEASE	P36B18M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE		BASIC SERIES PDU P36B18M CUSTOMER DRAWING	
ITEM REVISION NAME			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION		N/A	
		DRAWING NUMBER:	
		P36B18M_DC	
DRAWN BY	DATE	CHK	SCALE
KUN	05/24/2017	SEAN	NONE
SHT 1 OF 1		SCALE B	