


B

A



B

A


PANDUIT P/N	WEIGHT
P22B05M	2.0kg

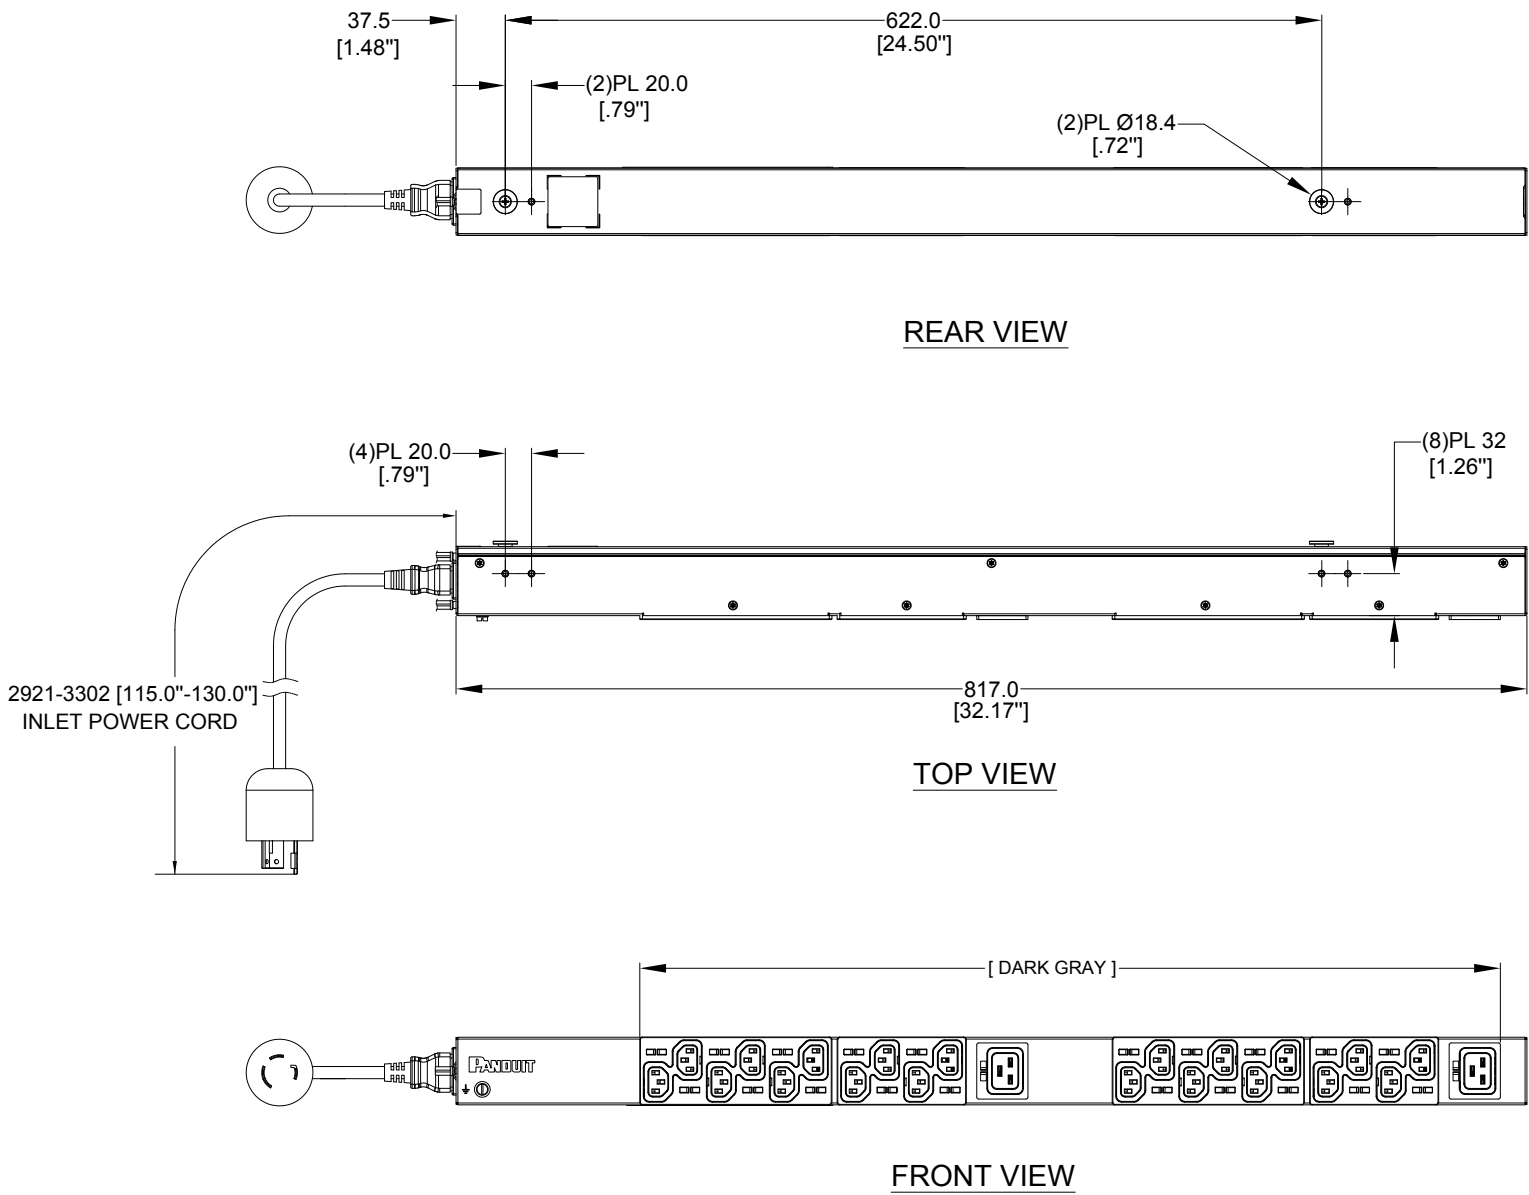

- NOTES:
1. IDENTIFICATION:
UNIT TYPE: BASIC
ORIENTATION: VERTICAL, HALF
OUTLET QTY&TYPE: (20) C13, (2) C19
BREAKER QTY&TYPE: N/A
INPUT VOLTAGE: 100-240VAC
INPUT CURRENT: 20A (16A DERATED)
INPUT PHASE: SINGLE-PHASE
RATED POWER: 1.9kVA
INPUT PLUG: NEMA L5-20P
INPUT CORD LENGTH: 3m [10']
 2. ACCESSORIES:
POCKET GUIDE
 3. RoHS COMPLIANT
 4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
 5. MAXIMUM ALLOWABLE INPUT POWER = 1.9kW
 6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

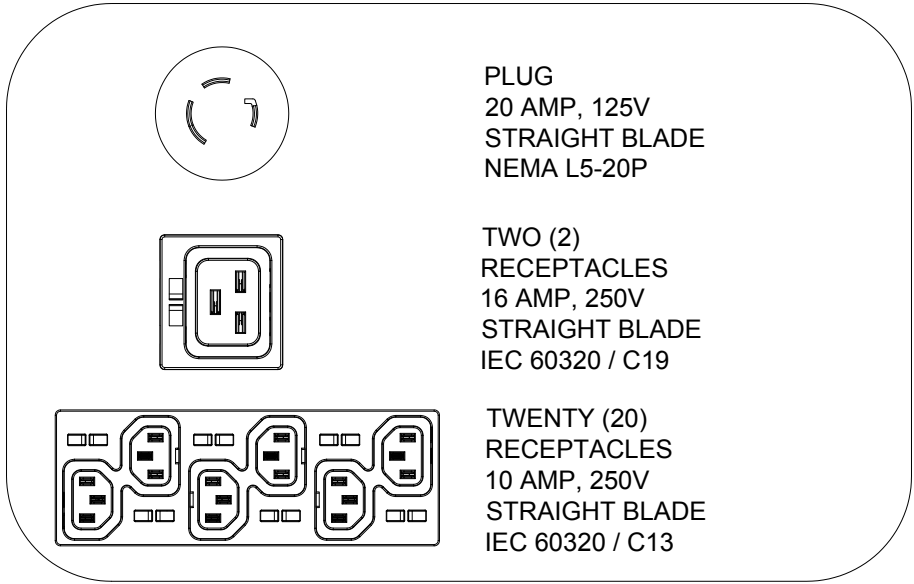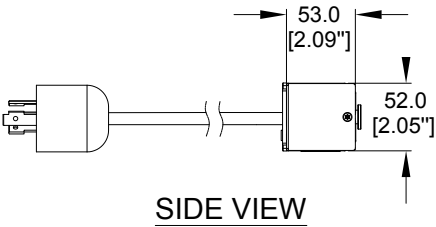

01B	08/21/2017	ZHAI	MIM	EDM	REVISED TOLERANCES	P22B05M
01A	06/28/2017	ZHAI	MIM	EDM	INITIAL RELEASE	P22B05M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY			SIGN	
			DATE	
			PRINT	
TITLE				
BASIC SERIES PDU P22B05M CUSTOMER DRAWING				
ITEM REVISION NAME				
DATASHEET FILE NAME:				
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				
Tolerance(mm)				
0<=50 ±0.5				
50<=250 ±1.0				
250<=500 ±1.5				
500<=1000 ±2.5				
1000<=2000 ±4.0				
 THIRD ANGLE PROJECTION			MATERIAL/COLOR:	
			N/A	
			DRAWING NUMBER:	
			P22B05M_DC	
DRAWN BY	DATE	CHK	SCALE	SCALE
DI.ZHAI	05/24/2017	SEAN	NONE	SHT 1 OF 1
				B