


B


A

B


A

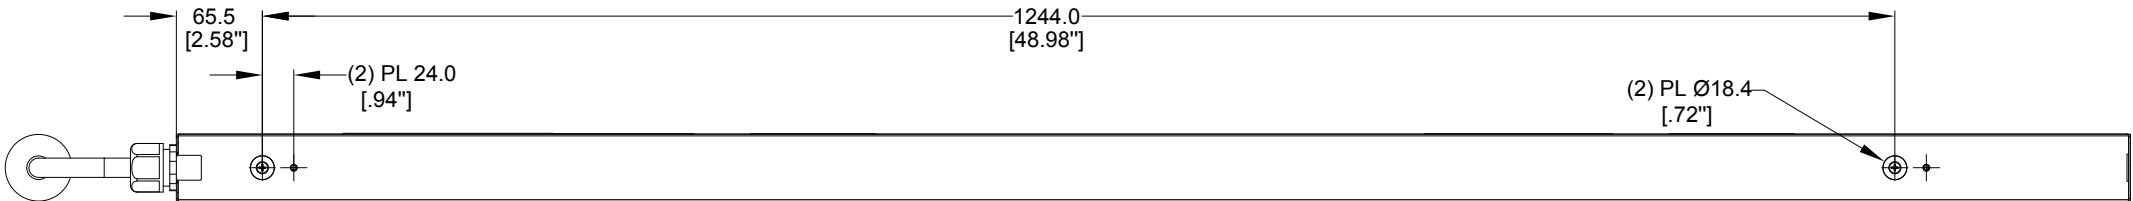


REAR VIEW

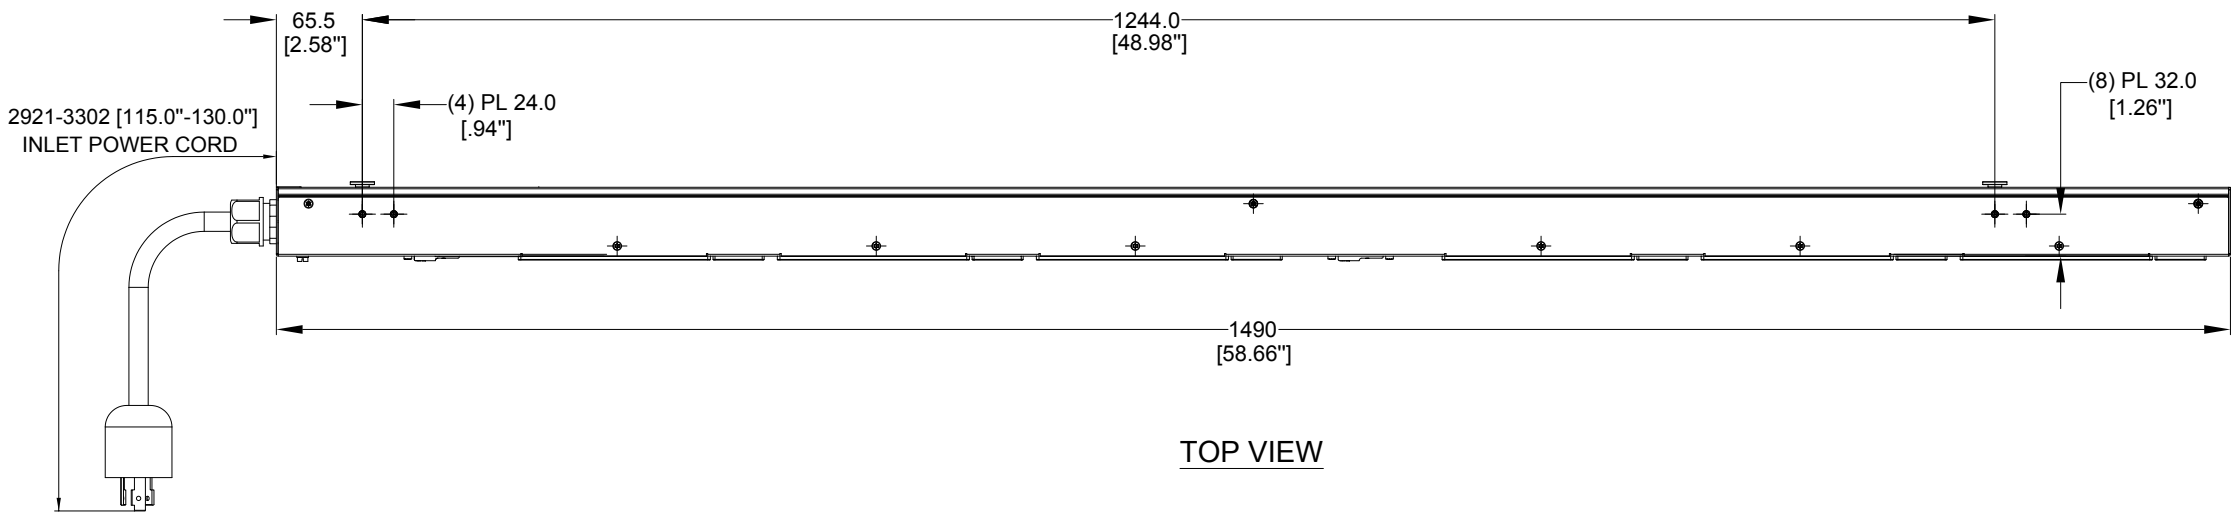

TOP VIEW

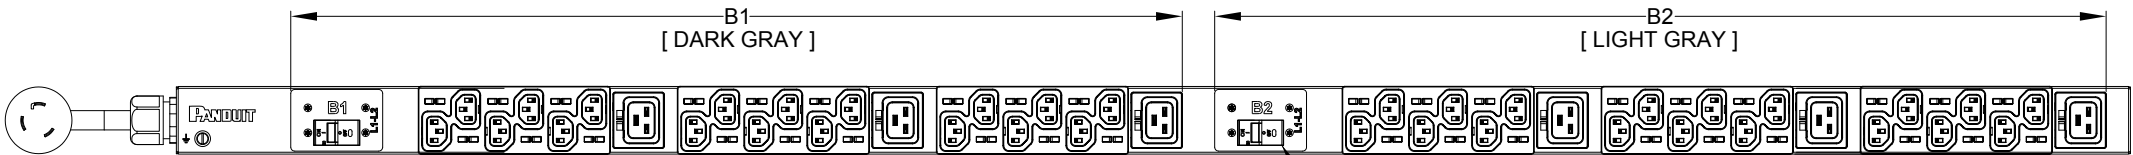


FRONT VIEW

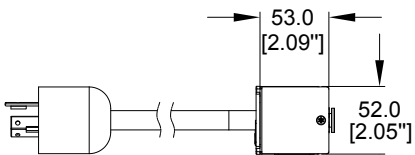

SIDE VIEW

NOTES:

1. IDENTIFICATION:
 - UNIT TYPE: BASIC
 - ORIENTATION: VERTICAL, MID
 - OUTLET QTY&TYPE: (36) C13, (6) C19
 - BREAKER QTY&TYPE: (2) 20A, DOUBLE-POLE
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 30A (24A DERATED)
 - INPUT PHASE: SINGLE PHASE
 - RATED POWER: 5.0kVA
 - INPUT PLUG: NEMA L6-30P
 - INPUT CORD LENGTH: 3m [10']
2. ACCESSORIES: POCKET GUIDE
3. RoHS COMPLIANT
4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 5.0kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES


WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN	
				DATE	
				PRINT	
TITLE					
BASIC SERIES PDU P42B17M CUSTOMER DRAWING					
ITEM REVISION NAME					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
Tolerance(mm)				N/A	
04<50 ±0.5				 THIRD ANGLE PROJECTION	
504<250 ±1.0					
2504<500 ±1.5					
5004<1000 ±2.5					
10004<2000 ±4.0				DRAWING NUMBER:	
				P42B17M_DC	
DRAWN BY		DATE	CHK	SCALE	SCALE
Hanson		05/24/2017	SEAN	NONE	SHT 1 OF 1
					B

1


2



PLUG
30 AMP, 250V
TWIST LOCK
NEMA L6-30P



SIX (6)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19

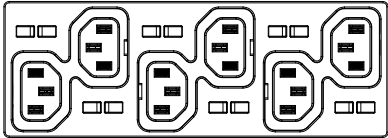

THIRTY-SIX (36)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13