


B


A

B


A

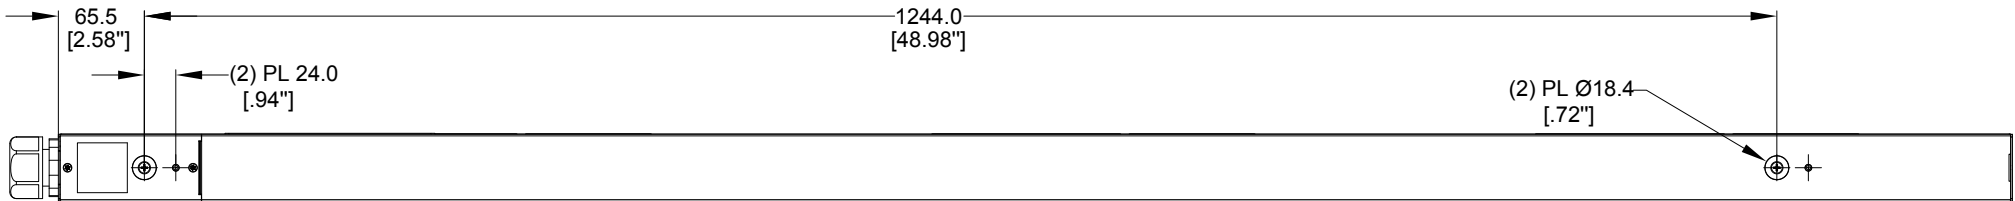

REAR VIEW

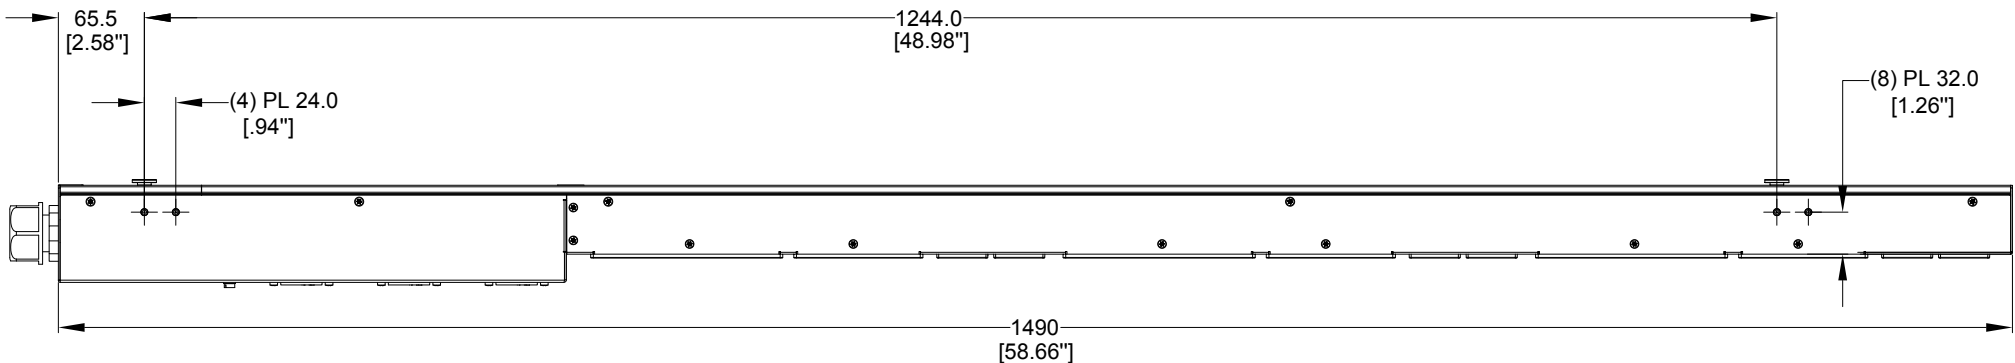


TOP VIEW

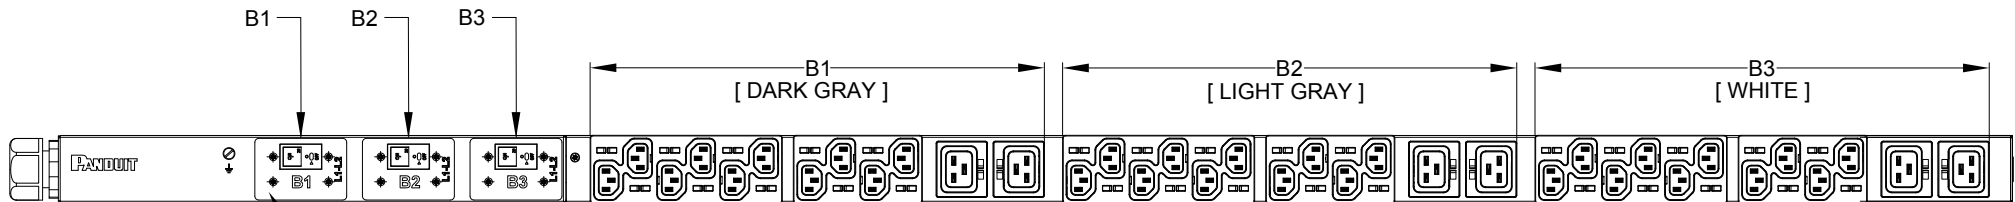

FRONT VIEW

20 AMP, DOUBLE - POLE ELECTRO-MECHANICAL SWITCH / BREAKER (3) PLACES




SIDE VIEW


PANDUIT P/N	WEIGHT
P36B20M	3.9kg

- NOTES:
1. IDENTIFICATION:
UNIT TYPE: BASIC
ORIENTATION: VERTICAL, MID
OUTLET QTY&TYPE: (30) C13, (6) C19
BREAKER QTY&TYPE: (3) 20A, DOUBLE-POLE
INPUT VOLTAGE: 200-240VAC
INPUT CURRENT: 50A (40A DERATED)
INPUT PHASE: SINGLE PHASE
RATED POWER: 8.3kVA
INPUT PLUG: N/A
INPUT CORD LENGTH: N/A
 2. ACCESSORIES: POCKET GUIDE
 3. RoHS COMPLIANT
 4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
 5. MAXIMUM ALLOWABLE INPUT POWER = 8.3kW
 6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES


WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE BASIC SERIES PDU P36B20M CUSTOMER DRAWING			
ITEM REVISION NAME			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
Tolerance(mm) 04<50 ±0.5 50<250 ±1.0 250<500 ±1.5 500<1000 ±2.5 1000<2000 ±4.0		DRAWING NUMBER: P36B20M_DC	
DRAWN BY KUN	DATE 05/24/2017	CHK SEAN	SCALE NONE
SHT 1 OF 1		SCALE B	



SIX (6)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19



TWELVE (12)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

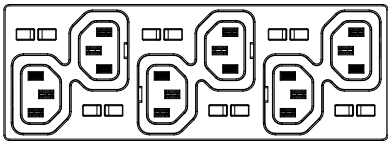

EIGHTEEN (18)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

01B	08/21/2017	DI.ZHAI	MIM	EDM	REVISED TOLERANCES	P36B20M
01A	06/28/2017	KUN	MIM	EDM	INITIAL RELEASE	P36B20M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN