

B

A

B

A

PANDUIT P/N	WEIGHT
P24B32M	9.6kg

- NOTES:
1. IDENTIFICATION:

UNIT TYPE:

ORIENTATION:

OUTLET QTY&TYPE:

BREAKER QTY&TYPE:

INPUT VOLTAGE:

INPUT CURRENT:

INPUT PHASE:

RATED POWER:

INPUT PLUG:

INPUT CORD LENGTH:

BASIC

VERTICAL, 0U HALF, 2-SIDED

(18) C13, (6) C19

(6) 20AMP, DOUBLE-POLE

200-240VAC, DELTA

60A (48A DERATED)






THREE-PHASE DELTA

17.3kVA


IEC 60309 3P+E 9H 60A

3m [10']
2. ACCESSORIES:


POCKET GUIDE
3. RoHS COMPLIANT
4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 17.3 kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

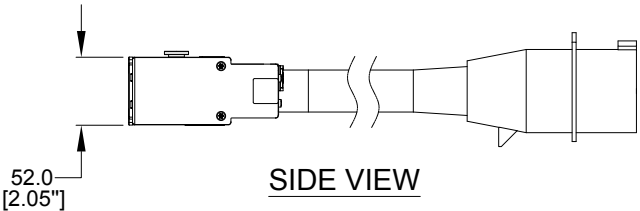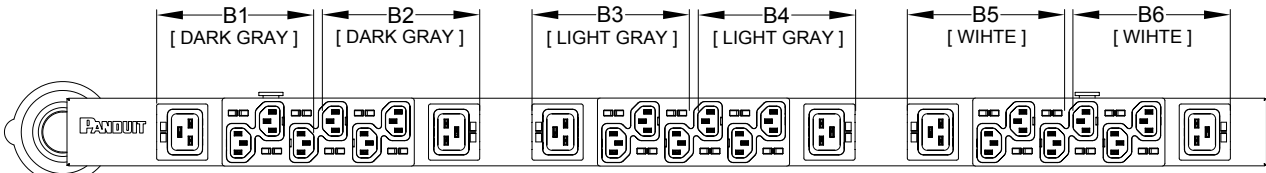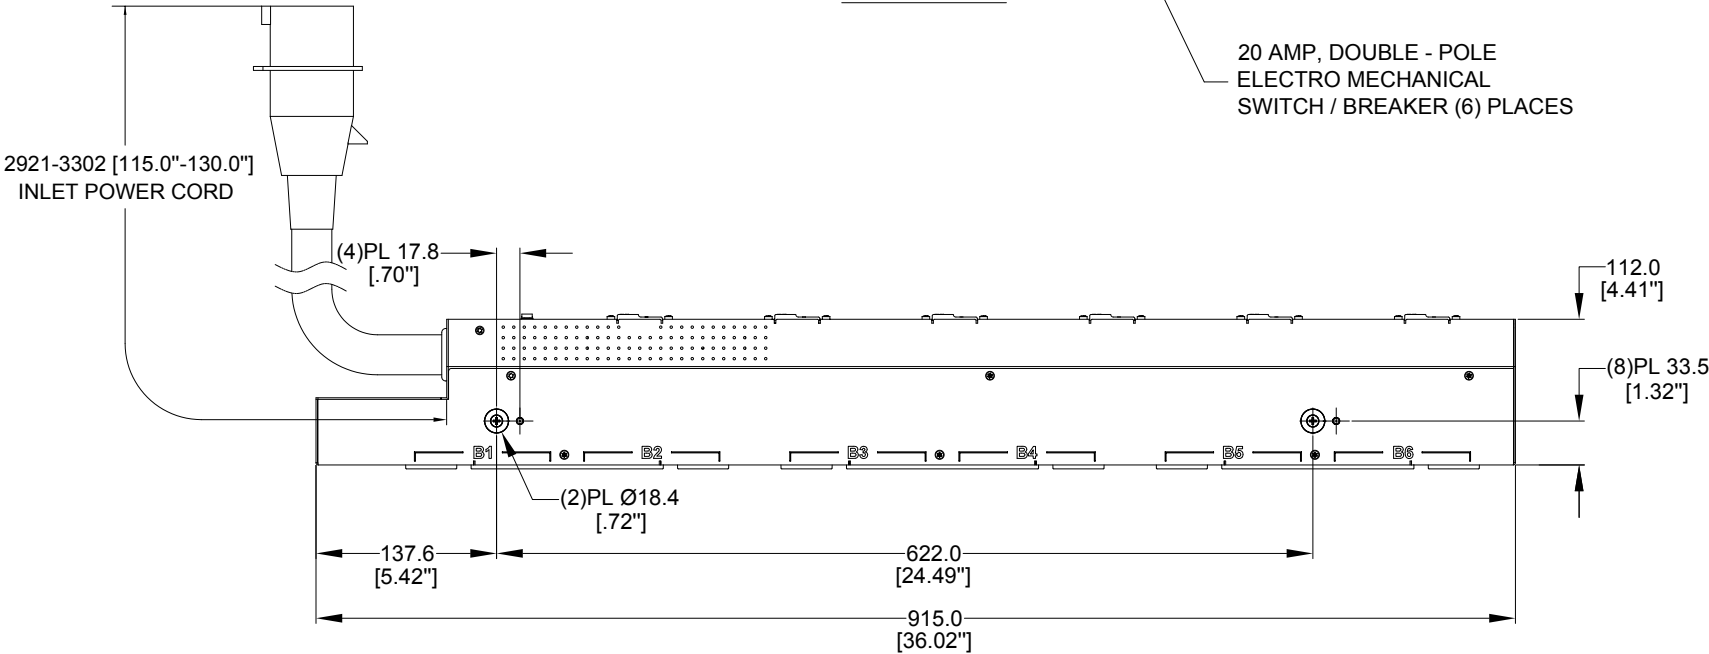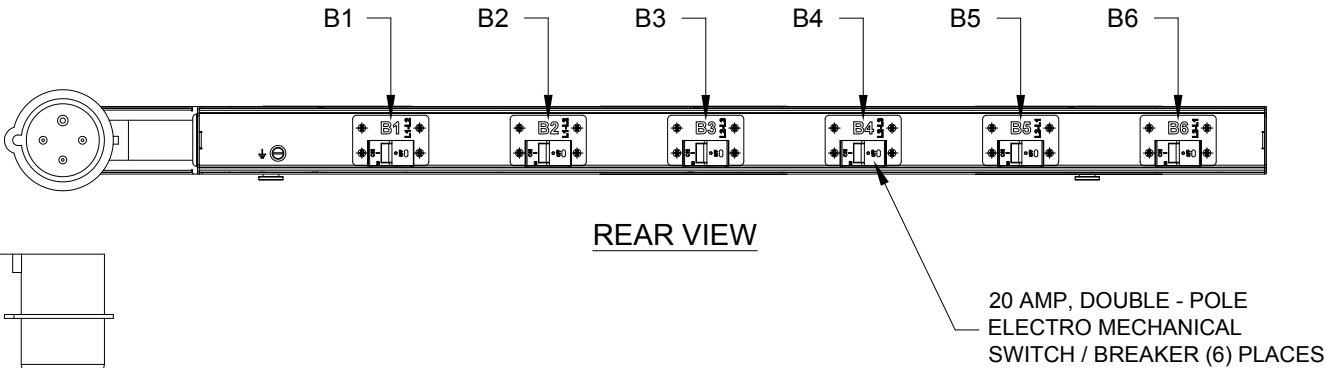

PLUG
60 AMP, 250V x 3~ DELTA
3P/4W
IEC 60309, SPLASHPROOF, IP44
2G (S); 2W (W), 9H




SIX (6)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19

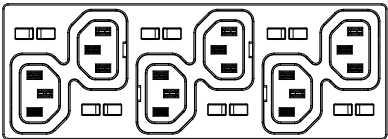

EIGHTEEN (18)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

01B	08/21/2017	ZHAI	MIM	EDM	REVISED TOLERANCES	P24B32M
01A	06/28/2017	ZHAI	MIM	EDM	INITIAL RELEASE	P24B32M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN	
				DATE	
				PRINT	
TITLE: BASIC SERIES PDU P24B32M CUSTOMER DRAWING					
ITEM REVISION NAME:					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION				N/A	
				DRAWING NUMBER: P24B32M_DC	
DRAWN BY DI.ZHAI	DATE 05/24/2017	CHK SEAN	SCALE NONE	SHT 1 OF 1	
				SCALE B	