


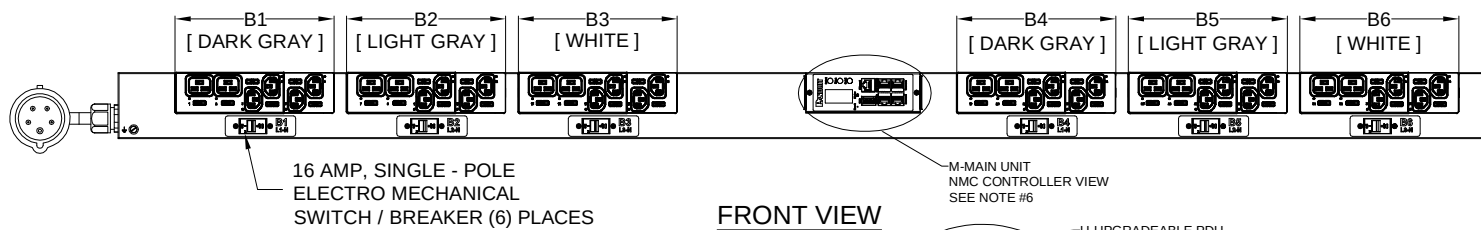
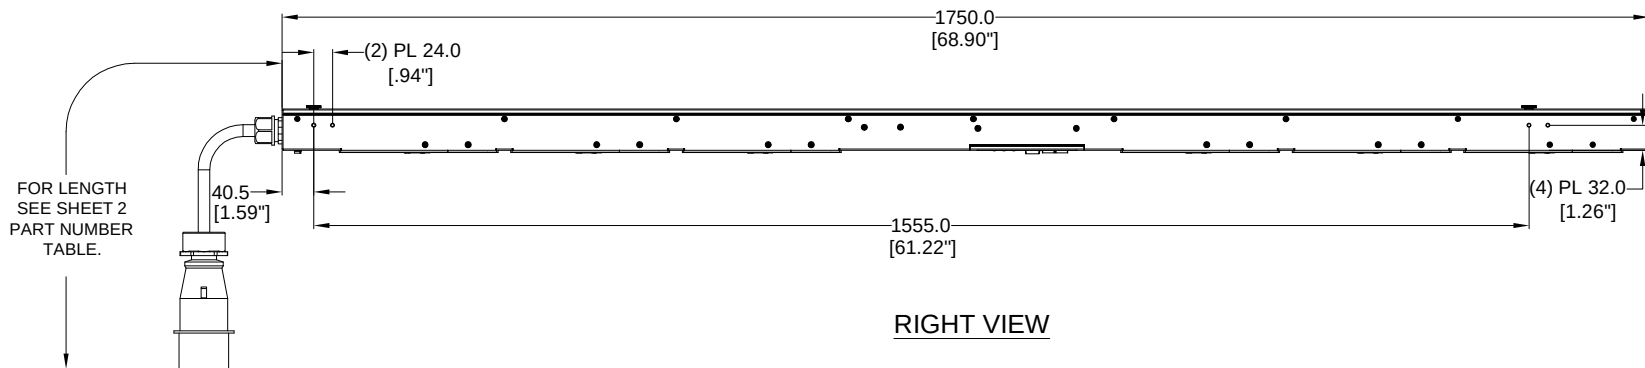


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

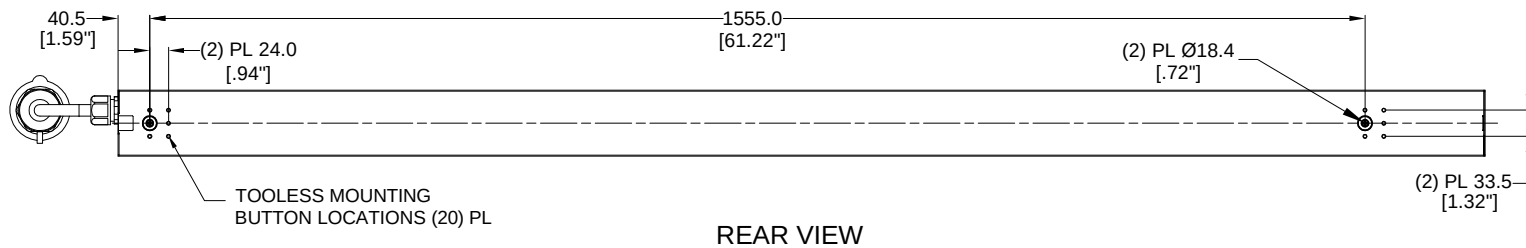

PLUG/RECEPTACLE BLOCK

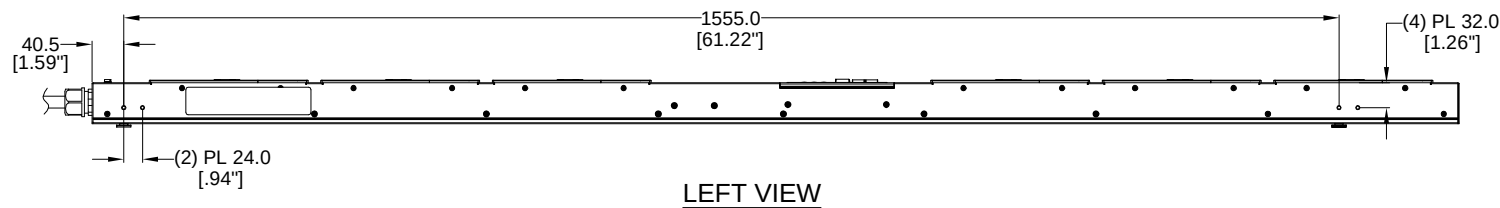

PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPLASHPROOF)
32A, 346-415V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04A	05/13/2022	ZLF	MIM	MJD	1. ADDED UPGRADEABLE PDU OPTION 2. REMOVED OBSOLETE SKU'S	P36E09M
03A	06/04/2020	LEO	MIM	EDM	UPDATED THE OUTLET DESIGN	P36E09M
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER'	P36E09M
01A	08/15/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36E09M

SPECIFICATION:

1. STANDARD:

UNIT TYPE:	SEE SHEET 2
ORIENTATION:	VERTICAL, 0U FULL, WIDE
OUTLET QTY&TYPE:	(24) C13, (12) C19
INPUT VOLTAGE:	200-240/346-415VAC
INPUT CURRENT:	32A
BREAKER QTY&TYPE:	(6) 16AMP, SINGLE-POLE
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	22.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 32A
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:

NONE

3. ACCESSORIES:

(1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION
- PARTS USING UPGRADEABLE IPDU BLANKING PANEL CAN BE UPGRADED TO INTELLIGENT MODELS USING PANDUIT CONTROLLER PART NUMBER MA002

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36E09M-XX Y Z

M: NMC TYPE M = MAIN PDU U = UPGRADEABLE PDU	XX: FINISHED GOOD COLOR BL = BLACK RD = RED WH = WHITE YL = YELLOW BU = BLUE GN = GREEN	Y: INPUT FEED TYPE 1 = TOP-END FED 2 = BOTTOM-END FED	Z: INPUT CORD LENGTH A = 1 METER B = 2 METER C = 3 METER
--	---	---	---

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE: INTELLIGENT SERIES PDU P36E09M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:		MATERIAL/COLOR: N/A	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0-1<50 ±0.5 50-1<250 ±1.0 250-1<500 ±1.5 500-1<1000 ±2.5 1000-1<2000 ±4.0		DRAWING NUMBER: P36E09M_DC	
DRAWN BY: GEORGE	DATE: 08/15/2017	CHK: SEAN	SCALE: NONE
SHT 1 OF 2		SCALE: B	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MAIN PDU CONFIGUGRATIONS				
FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36E09M	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-BL1A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-RD1A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-RD1C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-YL1A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-YL1C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-BU1A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-BU1C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-BL2A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-BL2C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-RD2A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-RD2C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-YL2A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-YL2C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-BU2A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-BU2C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[+10"/-5"]	10.8kg
UPGRADEABLE PDU CONFIGUGRATIONS				
FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36E09U	UPGRADEABLE,VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	10.5kg

04A	05/13/2022	ZLF	MIM	MJD	1.ADDED UPGRADEABLE PDU OPTION 2.REMOVED OBSOLETE SKU'S	P36E09M
03A	06/04/2020	LEO	MIM	EDM	UPDATED THE OUTLET DESIGN	P36E09M
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER'	P36E09M
01A	08/15/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36E09M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE: INTELLIGENT SERIES PDU P36E09M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0-1<50 ±0.5 50-1<250 ±1.0 250-1<500 ±1.5 500-1<1000 ±2.5 1000-1<2000 ±4.0		MATERIAL/COLOR: N/A	
 THIRD ANGLE PROJECTION		DRAWING NUMBER: P36E09M_DC	
DRAWN BY GEORGE	DATE 08/15/2017	CHK SEAN	SCALE NONE
SHT 2 OF 2		SCALE B	