




PANDUIT P/N	WEIGHT
P24F02M-XXYZ	SEE SHEET 2

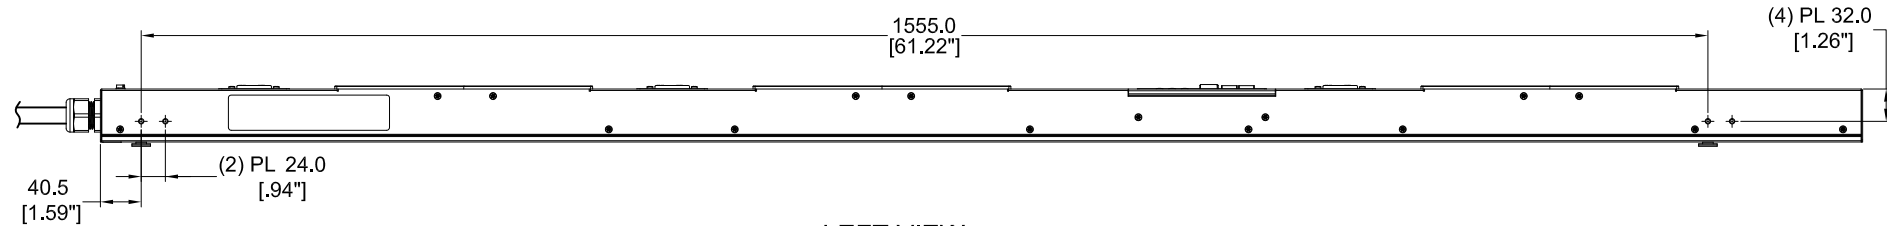


LEFT VIEW

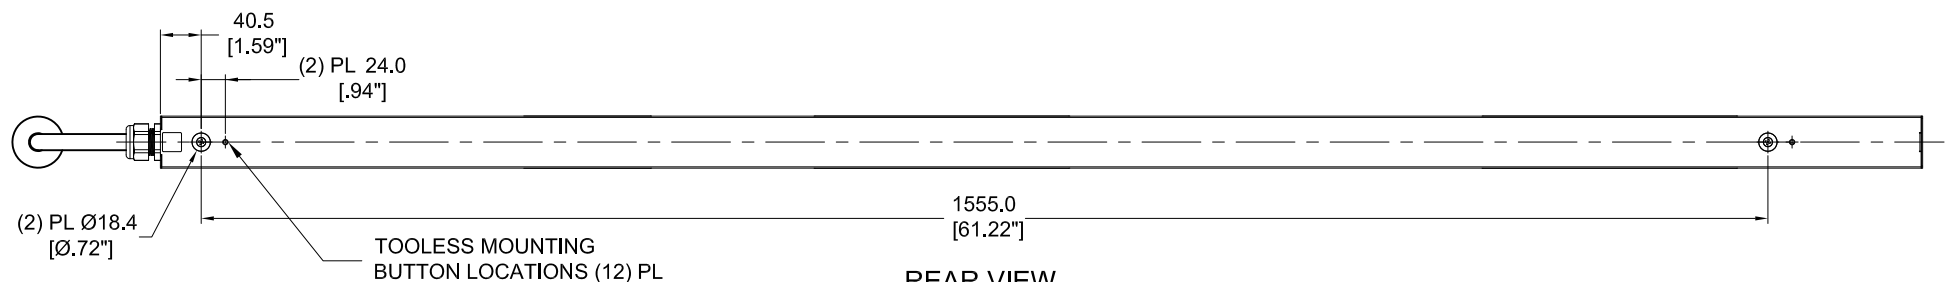


REAR VIEW

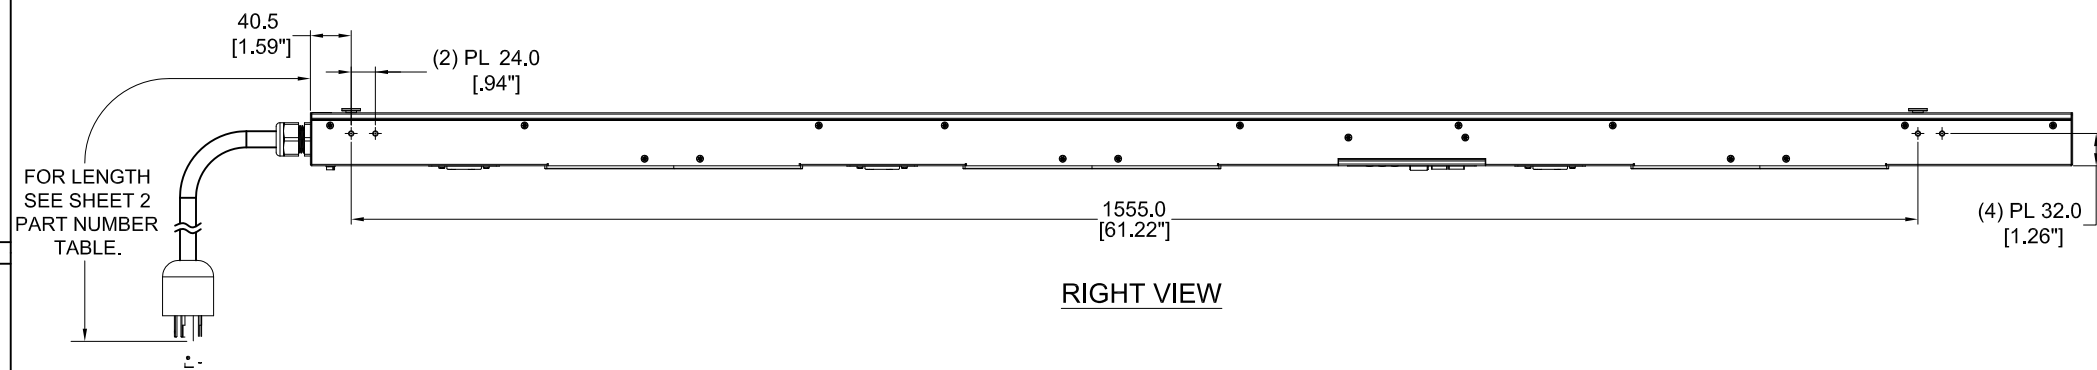

RIGHT VIEW

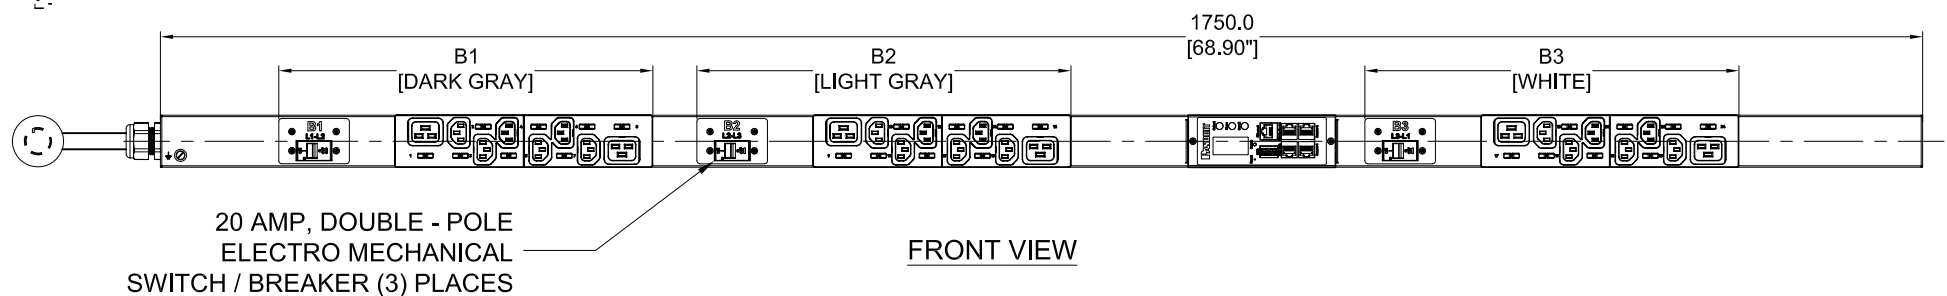

FRONT VIEW



BOTTOM VIEW

1. STANDARD:	
UNIT TYPE:	MONITORED OUTLET
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY & TYPE:	(18) C13, (6) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	30A (24A DERATED)
BREAKER QTY & TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE, DELTA
RATED POWER:	8.6KVA
INPUT PLUG:	NEMA L15-30P
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:
NONE

3. ACCESSORIES:
(1) QUICK-START GUIDE

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P24F02M-XX Y Z

XX: FINISHED GOOD COLOR

BL =BLACK	YL =YELLOW
RD =RED	BU =BLUE
WH =WHITE	GN =GREEN

Y: INPUT FEED TYPE
1 =TOP-END FED
2 =BOTTOM-END FED

Z: INPUT CORD LENGTH

A = 1 METER
B = 2 METER
C = 3 METER



PLUG
NEMA L15 - 30P, 3P 4W
30A, 250V, 3 - PHASE MAX RATED INPUT
24A DERATED




RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24F02M
01A	10/09/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24F02M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P24F02M-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION				N/A	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0				DRAWING NUMBER: P24F02M_DC	
DRAWN BY	DATE	CHK	SCALE	SCALE	
WSJ	10/09/2017	SEAN	NONE	SHT 1 OF 2 B	



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

[illegible]

B

B



A

A

							DELIVERY					
							TITLE		INTELLIGENT SERIES PDU P24F02M-XXYZ			
							ITEM REVISION NAME		CUSTOMER DRAWING			
							DATASHEET FILE NAME:					
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24F02M	UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:			
01A	10/09/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24F02M	 THIRD ANGLE PROJECTION		N/A			
							Tolerance(mm) 0<≤50 ±0.5 50<≤250 ±1.0 250<≤500 ±1.5 500<≤1000 ±2.5 1000<≤2000 ±4.0		DRAWING NUMBER: P24F02M_DC			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY WSJ	DATE 10/09/2017	CHK SEAN	SCALE NONE	SHT 2 OF 2	SCALE B

