

PANDUIT P/N	WEIGHT
P36F16M-XXYZ	SEE SHEET 2

LEFT VIEW

REAR VIEW

RIGHT VIEW

FRONT VIEW


TOOLESS MOUNTING
BUTTON LOCATIONS (12) PL

20 AMP, DOUBLE-POLE ELECTRO
MECHANICAL SWITCH / BREAKER(3) PLACES

1. STANDARD:	
UNIT TYPE:	MONITORED OUTLET
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY & TYPE:	(30) C13, (6) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	30A (24A DERATED)
BREAKER QTY & TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE DELTA
RATED POWER:	8.6kVA
INPUT PLUG:	NEMA L15-30P
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT
2. ADDITIONAL: NONE	
3. ACCESSORIES:	
(1) QUICK-START GUIDE	

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P36F16M-XX Y Z

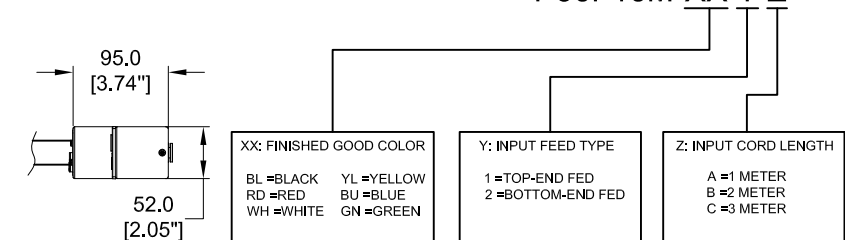

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT													
TITLE INTELLIGENT SERIES PDU P36F16M-XXYZ CUSTOMER DRAWING															
ITEM REVISION NAME:															
DATASHEET FILE NAME:															
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:													
THIRD ANGLE PROJECTION		N/A													
<table border="0"> <tr> <td></td> <td style="text-align: center;">Tolerance(mm)</td> </tr> <tr> <td>04<50</td> <td style="text-align: center;">±0.5</td> </tr> <tr> <td>50<4250</td> <td style="text-align: center;">±1.0</td> </tr> <tr> <td>250<4500</td> <td style="text-align: center;">±1.5</td> </tr> <tr> <td>1000<41000</td> <td style="text-align: center;">±2.5</td> </tr> <tr> <td>4000<42000</td> <td style="text-align: center;">±4.0</td> </tr> </table>			Tolerance(mm)	04<50	±0.5	50<4250	±1.0	250<4500	±1.5	1000<41000	±2.5	4000<42000	±4.0	DRAWING NUMBER: P36F16M_DC	
	Tolerance(mm)														
04<50	±0.5														
50<4250	±1.0														
250<4500	±1.5														
1000<41000	±2.5														
4000<42000	±4.0														
DRAWN BY GEORGE	DATE 10/11/2017	CHK SEAN	SCALE NONE												
		SHT 1 OF 2													
		SCALE B													

PLUG
NEMA L15-30P, 3P 4W
30A, 250V, 3-PHASE MAX RATED INPUT
24A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36F16M
01A	10/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36F16M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36F16M	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-BL1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-BL1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-RD1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-RD1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-RD1C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-WH1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-WH1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-WH1C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-YL1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-YL1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-YL1C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-BU1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-BU1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-BU1C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-GN1A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-GN1B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-GN1C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-BL2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-BL2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-BL2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-RD2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-RD2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-RD2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-WH2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-WH2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-WH2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-YL2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-YL2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-YL2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-BU2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-BU2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-BU2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg
P36F16M-GN2A	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[*+7"/-3.5"]	8.4kg
P36F16M-GN2B	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	8.9kg
P36F16M-GN2C	VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240V/30A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[*+10"/-5"]	9.4kg

B

B

A

A

02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36F16M
01A	10/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36F16M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE
INTELLIGENT SERIES PDU
P36F16M-XYZ
CUSTOMER DRAWING

ITEM REVISION NAME:
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

THIRD ANGLE
PROJECTION

Tolerance(mm)
0<L<50
50<L<250
250<L<500
500<L<1000
1000<L<2000

±0.5
±1.0
±1.5
±2.5
±4.0

MATERIAL/COLOR:
N/A
DRAWING NUMBER:
P36F16M_DC

DRAWN BY
GEORGE

DATE
10/11/2017

CHK
SEAN

SCALE
NONE

SHT 2 OF 2

SCALE
B

2

1