
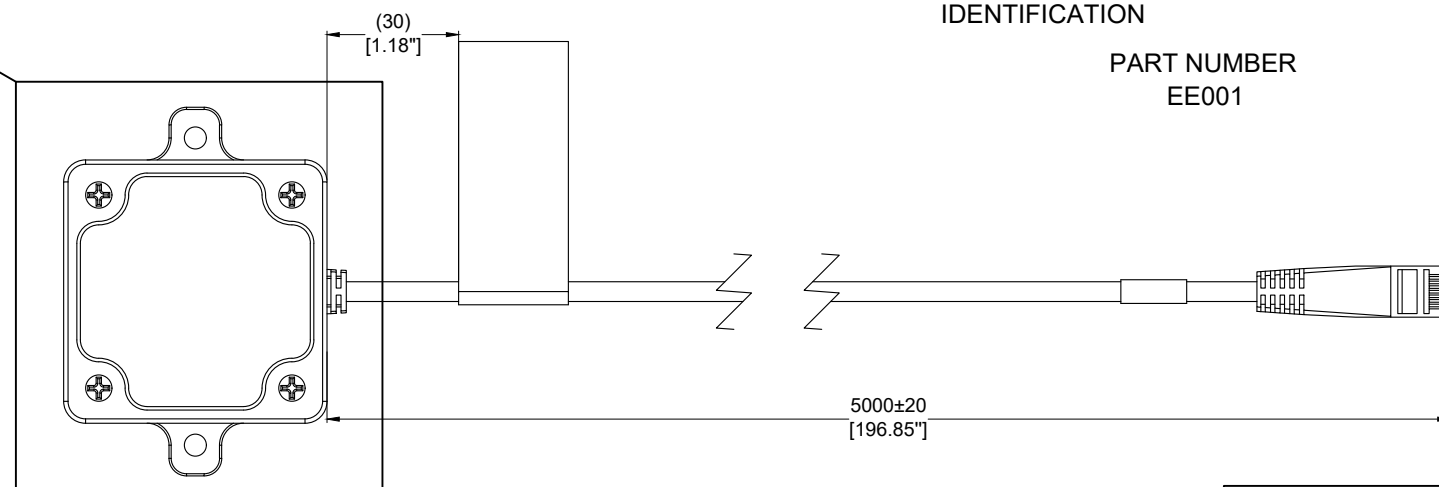
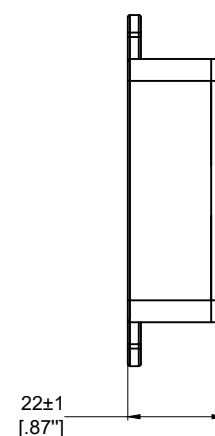
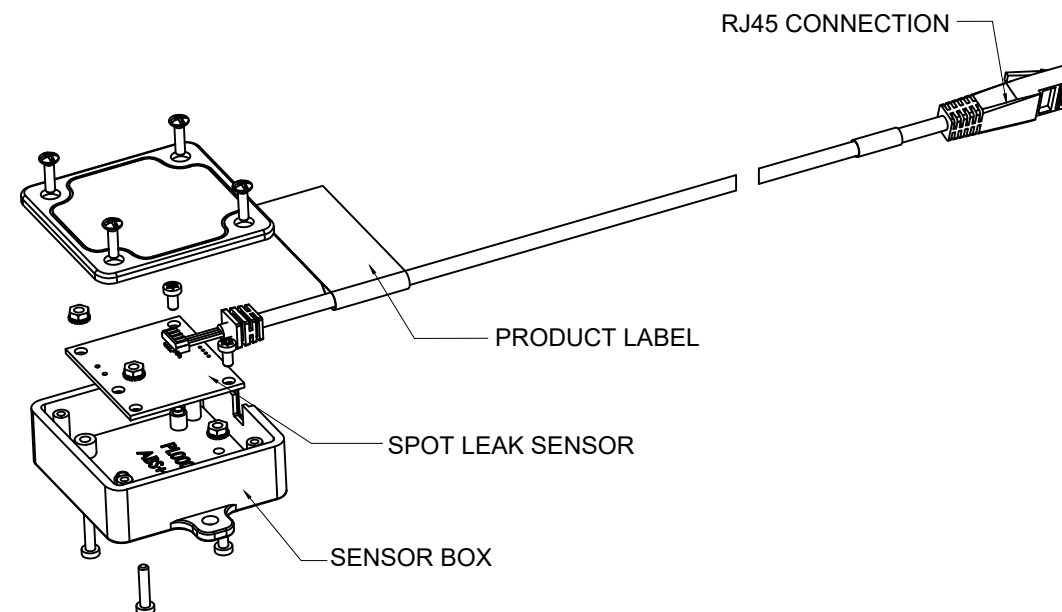


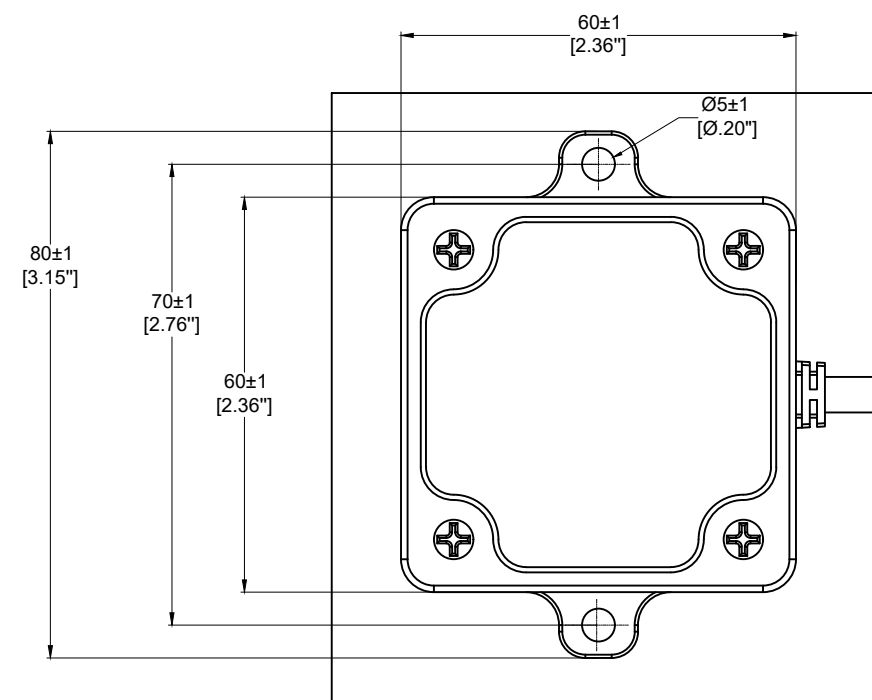

PANDUIT P/N	WEIGHT
EE001	1.2kg

SPECIFICATION:

1. STANDARD
MEASURING RANGE:

OPERATING RANGE:

OPERATIONAL VOLTAGE:
CURRENT DRAW:
SENSOR HOUSING MATERIAL:
SENSOR HOUSING COLOR:
INTERFACE PLUG:
INTERFACE PLUG HOUSING MATERIAL:
INTERFACE PLUG HOUSING COLOR:
2. ADDITIONAL:
NONE
3. ACCESSORY COMPONENTS:
INSTALLATION PAD, QTY:(1)
CABLE TIES, QTY:(5)
ADHESIVE BACKED MOUNT, QTY:(5)

DETECTS LIQUIDS WITH A RESISTANCE OF
<2MOHMS PER CM
0°C - 65°C, NON-CONDENSING
[32°F - 149°F, NON-CONDENSING]
4.2 - 5.5 VOLTS DC
30 mA MAX
ABS, 10% GLASS-FILLED
BLACK
RJ45 COMPLIANT
PC
TRANSPARENT

NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART

IDENTIFICATION

PART NUMBER
EE001

DESCRIPTION
SPOT FLUID LEAK SENSOR KIT

01B	01/13/2025	NW	CSH	MJD	REMOVE THE WORD SMARTZONE AND INSTALLATION GUIDE IN ACCESSORY COMPONENTS	EE001
01A	05/23/2022	NW	MIM	MJD	1. OPFRATIONAL VOLTAGE 4.2 – 5.5 VOLTS WAS 5 +/-0.1 VOLTS	EE001
00A	11/01/2017	Hanson	MIM	DJB	INITIAL RELEASE	EE001
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE: SPOT FLUID LEAK SENSOR KIT			
		CUSTOMER DRAWING	
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
 THIRD ANGLE PROJECTION		DRAWING NUMBER: EE001_DC	
WIRE HARNESS TOLERANCE(MM)	0<L<500 ±10 500<L<2000 ±20 2000<L<6000 ±50		
DRAWN BY Hanson	DATE 11/01/2017	CHK MM	SCALE NONE
		SHT 1 OF 1	
		SCALE B	