


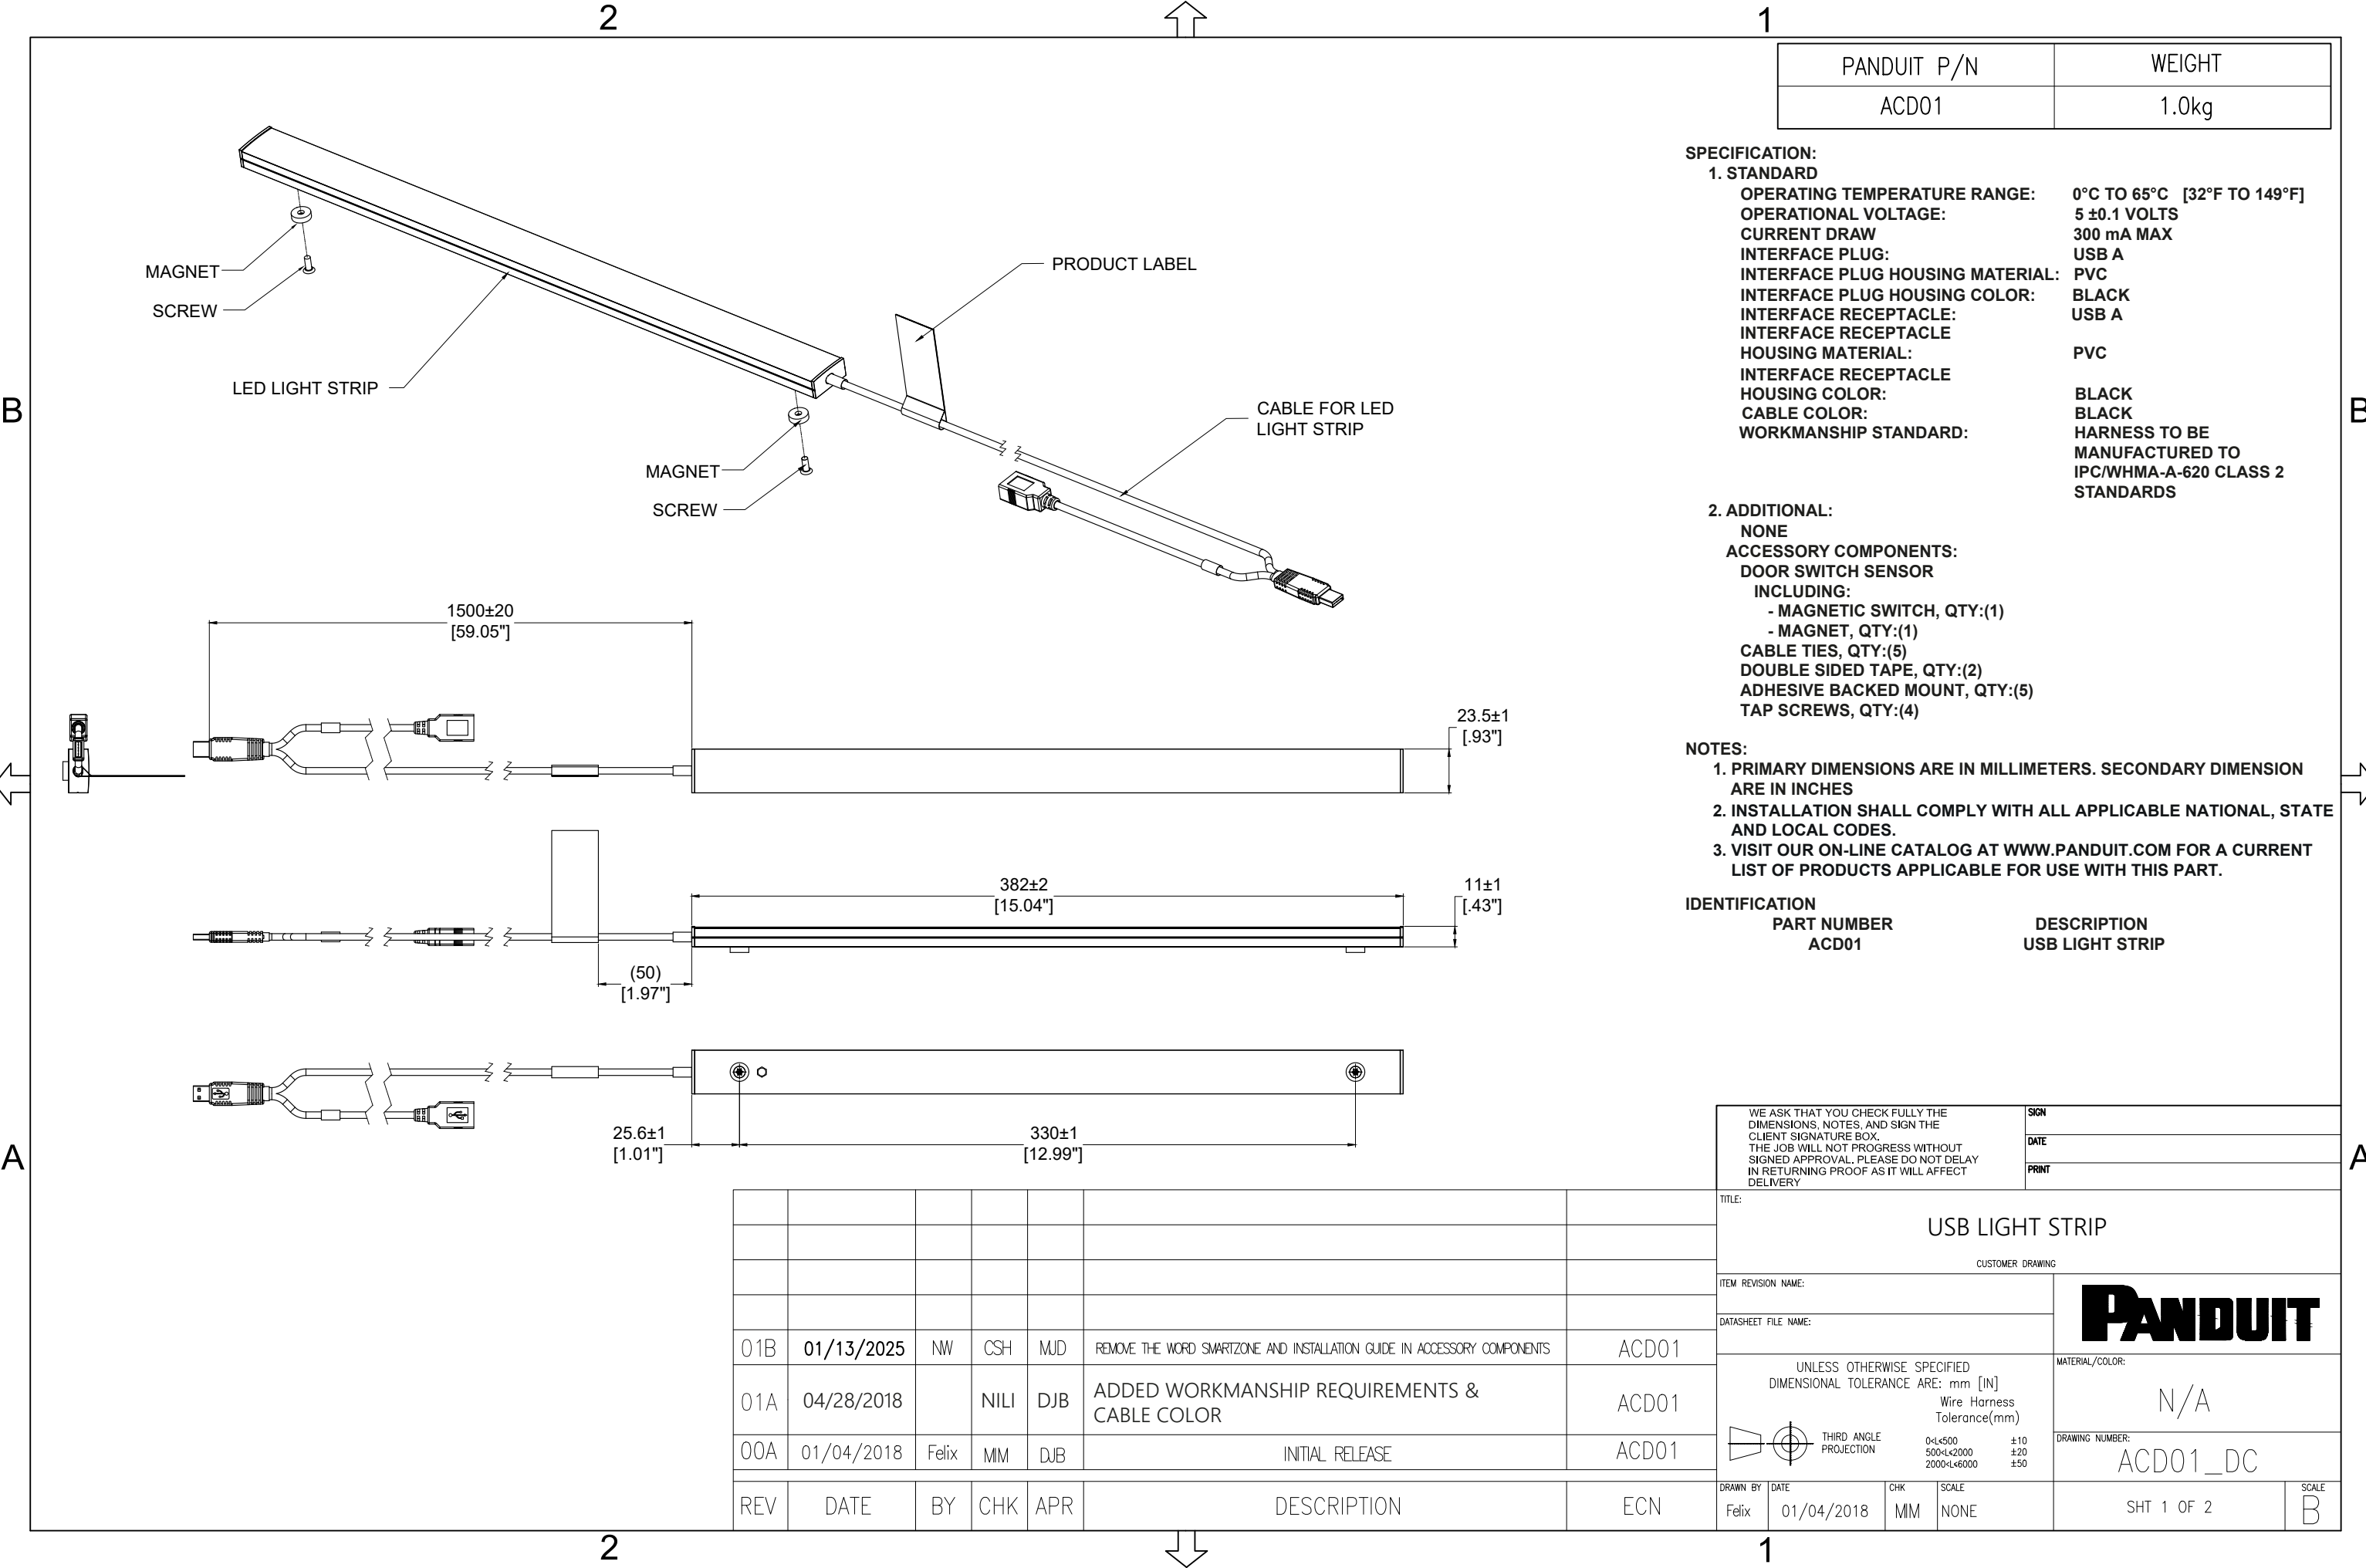

PANDUIT P/N

ACD01

WEIGHT

1.0kg

SPECIFICATION:

1. STANDARD

OPERATING TEMPERATURE RANGE: 0°C TO 65°C [32°F TO 149°F]

OPERATIONAL VOLTAGE: 5 ±0.1 VOLTS

CURRENT DRAW: 300 mA MAX

INTERFACE PLUG: USB A

INTERFACE PLUG HOUSING MATERIAL: PVC

INTERFACE PLUG HOUSING COLOR: BLACK

INTERFACE RECEPTACLE: USB A

INTERFACE RECEPTACLE HOUSING MATERIAL: PVC

INTERFACE RECEPTACLE HOUSING COLOR: BLACK

CABLE COLOR: BLACK

WORKMANSHIP STANDARD: HARNESS TO BE MANUFACTURED TO IPC/WHMA-A-620 CLASS 2 STANDARDS

2. ADDITIONAL:

NONE

ACCESSORY COMPONENTS:

DOOR SWITCH SENSOR

INCLUDING:

- MAGNETIC SWITCH, QTY:(1)

- MAGNET, QTY:(1)

CABLE TIES, QTY:(5)

DOUBLE SIDED TAPE, QTY:(2)

ADHESIVE BACKED MOUNT, QTY:(5)

TAP SCREWS, QTY:(4)

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES

2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.

3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.

IDENTIFICATION

PART NUMBER

ACD01

DESCRIPTION

USB LIGHT STRIP

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN

DATE

PRINT

TITLE:

USB LIGHT STRIP

CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]

Wire Harness Tolerance(mm)

0<L<500 ±10

500<L<2000 ±20

2000<L<6000 ±50

THIRD ANGLE PROJECTION

MATERIAL/COLOR:

N/A

DRAWING NUMBER:

ACD01_DC

DRAWN BY

DATE

CHK

SCALE

SHT 1 OF 2

SCALE

B