
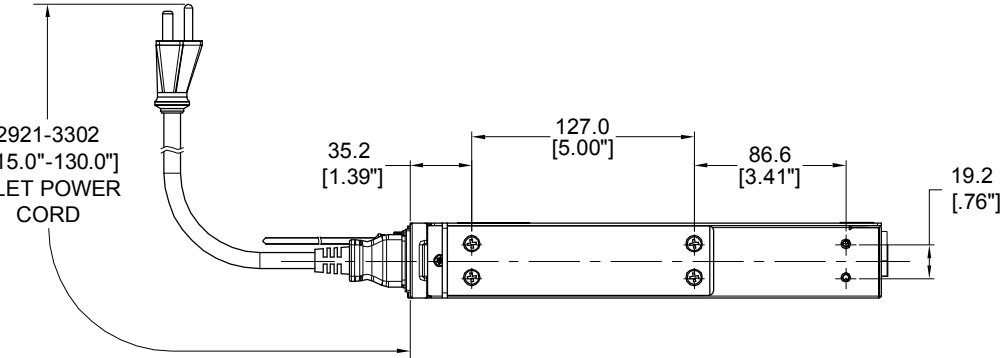


B

A

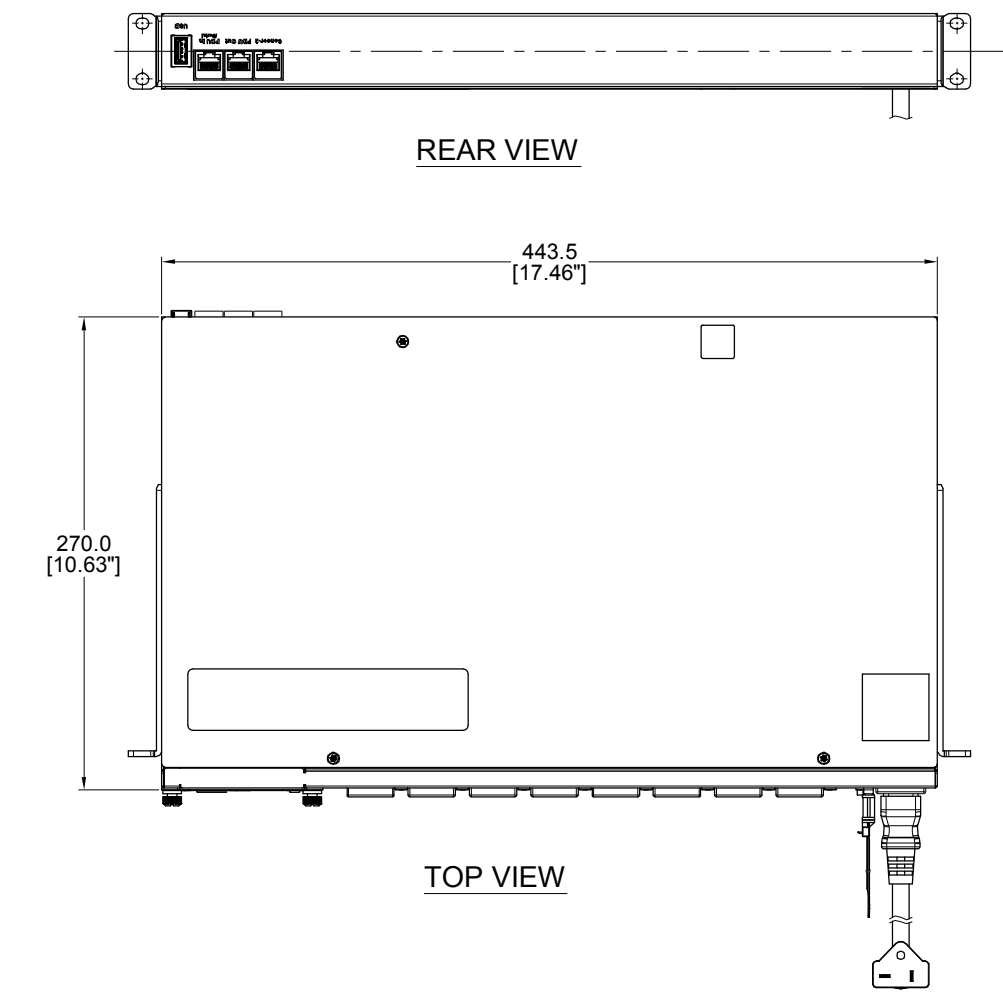

PANDUIT P/N	WEIGHT
P08E15M	6.1kg

- NOTES:
- IDENTIFICATION:
UNIT TYPE: MONITORED SWITCHED
ORIENTATION: HORIZONTAL, 1U
OUTLET QTY&TYPE: (8) 5-20R
BREAKER QTY&TYPE: N/A
INPUT VOLTAGE: 100-120VAC
INPUT CURRENT: 20A (16A DERATED)
INPUT PHASE: SINGLE-PHASE
RATED POWER: 1.9kVA
INPUT PLUG: NEMA 5-20P
INPUT CORD LENGTH: 3m [10']
 - ACCESSORIES:
POCKET GUIDE
QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
QTY: (4) M6 CAGED NUT
 - RoHS COMPLIANT
 - VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
 - MAXIMUM ALLOWABLE INPUT POWER = 1.9kW
 - INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

PLUG
20 AMP, 125V
STRAIGHT BLADE
NEMA 5-20P

EIGHT (8)
RECEPTACLES
20 AMP, 125V
STRAIGHT BLADE
NEMA 5-20R

01A	09/21/2017	WSJ	MIM	EDM	INITIAL RELEASE	P08E15M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____
DATE _____
PRINT _____

TITLE

INTELLIGENT SERIES PDU
P08E15M
CUSTOMER DRAWING

ITEM REVISION NAME

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
0<L<50 ±0.5
50<L<250 ±1.0
250<L<500 ±1.5
500<L<1000 ±2.5
1000<L<2000 ±4.0

THIRD ANGLE
PROJECTION

MATERIAL/COLOR:

N/A

DRAWING NUMBER:

P08E15M_DC

DRAWN BY: WSJ
DATE: 09/21/2017
CHK: SEAN
SCALE: NONE

SHT 1 OF 1

SCALE: B

2

1