

PANDUIT P/N	WEIGHT
ACC01	0.135kg

SPECIFICATION:

1. STANDARD

OPERATING TEMPERATURE RANGE:	0°C TO 65°C [32°F TO 149°F]
OPERATIONAL VOLTAGE:	4.2-5.5 VOLTS
CURRENT DRAW	30 mA MAX
SENSOR HOUSING MATERIAL:	ABS, 10% GLASS-FILLED
SENSOR HOUSING COLOR:	BLACK
INTERFACE PLUG:	RJ45 COMPLAINT
INTERFACE PLUG HOUSING MATERIAL:	PC
INTERFACE PLUG HOUSING COLOR:	TRANSPARENT
CABLE COLOR:	BLACK
WORKMANSHIP STANDARD:	HARNESS TO BE MANUFACTURED TO IPC/WHMA-A-620 CLASS 2 STANDARDS

2. ADDITIONAL:

NONE

3. ACCESSORY COMPONENTS:



NONE

NOTES:


- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.

IDENTIFICATION

PART NUMBER	DESCRIPTION
ACC01	DRY CONTACT CABLE

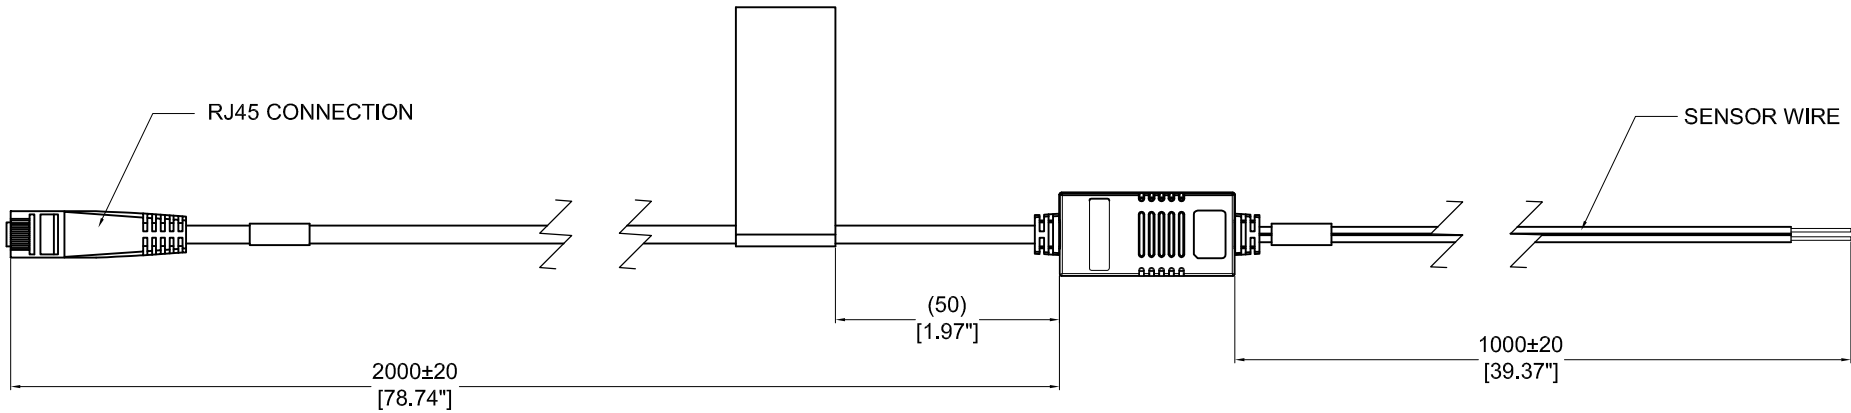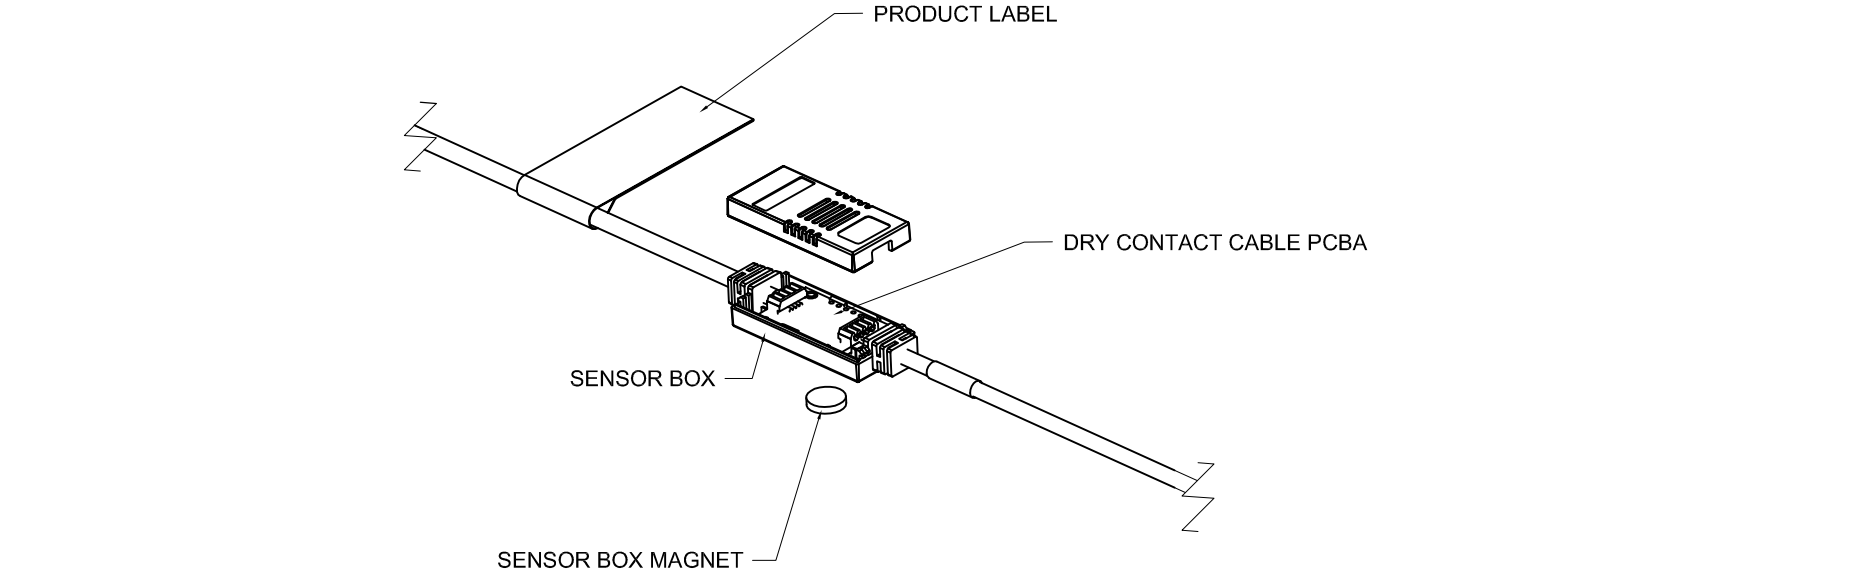

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	01/13/2025	NW	CSH	MJD	REMOVE THE WORD SMARTZONE AND INSTALLATION GUIDE IN ACCESSORY COMPONENTS	ACC01
01A	04/28/2018		NILI	DJB	ADDED WORKMANSHIP REQUIREMENTS & CABLE COLOR	ACC01
00A	01/04/2018	Felix	MM	DJB	INITIAL RELEASE	ACC01

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN							
		DATE							
		PRINT							
TITLE: DRY CONTACT CABLE									
CUSTOMER DRAWING									
ITEM REVISION NAME:									
DATASHEET FILE NAME:									
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Wire Harness Tolerance(mm) <table><tr><td>0<L<500</td><td>±10</td></tr><tr><td>500<L<2000</td><td>±20</td></tr><tr><td>2000<L<6000</td><td>±50</td></tr></table> 		0<L<500	±10	500<L<2000	±20	2000<L<6000	±50	MATERIAL/COLOR: N/A	
0<L<500	±10								
500<L<2000	±20								
2000<L<6000	±50								
		DRAWING NUMBER: ACC01_DC							
DRAWN BY	DATE	CHK	SCALE						
Felix	01/04/2018	MIM	NONE						
SHT 1 OF 2			SCALE B						