


B


A

B


A

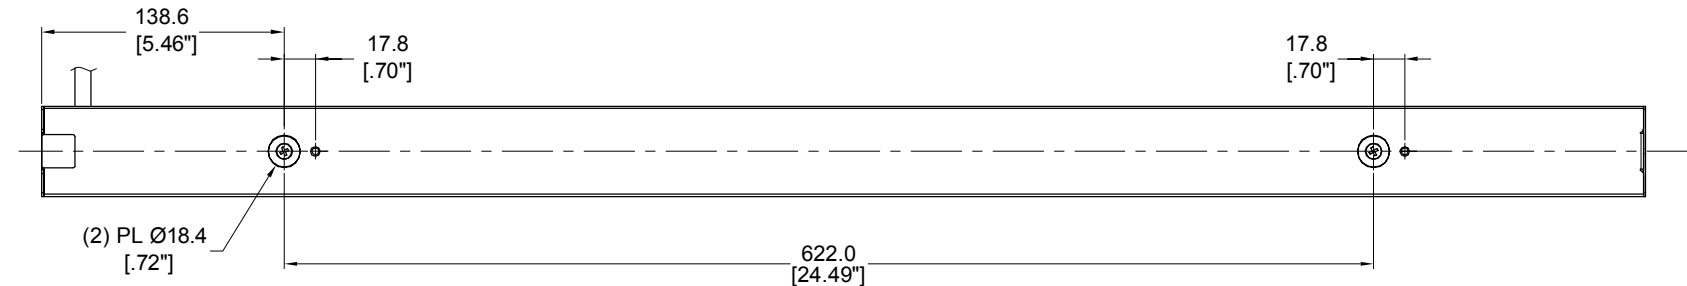


REAR VIEW

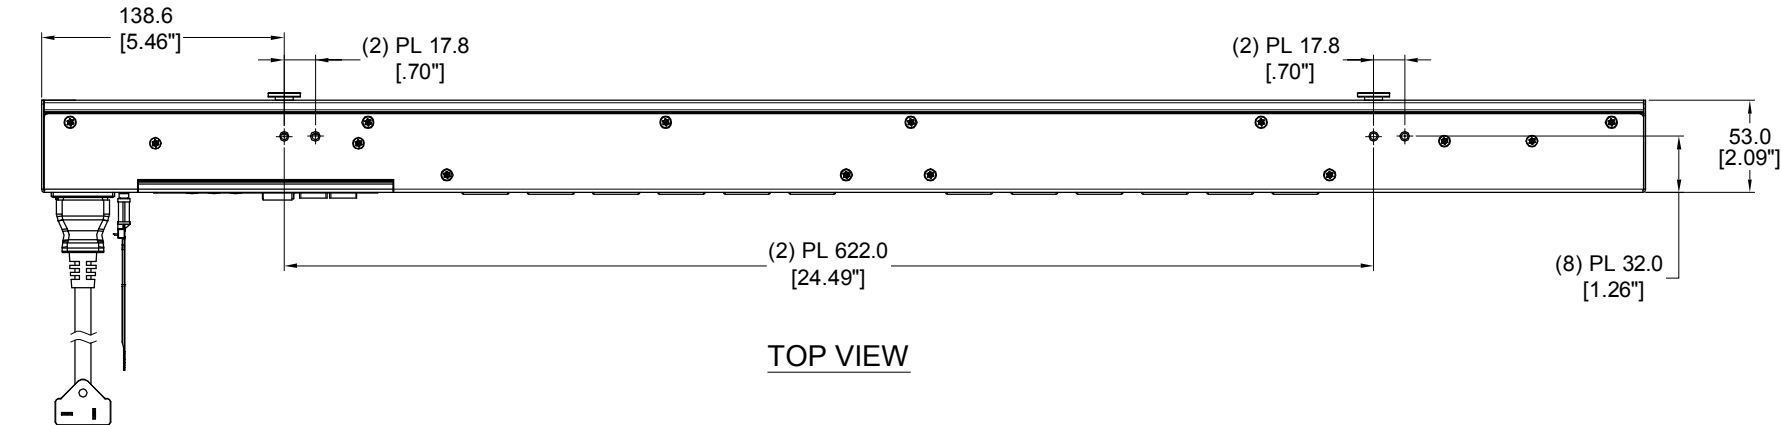

TOP VIEW

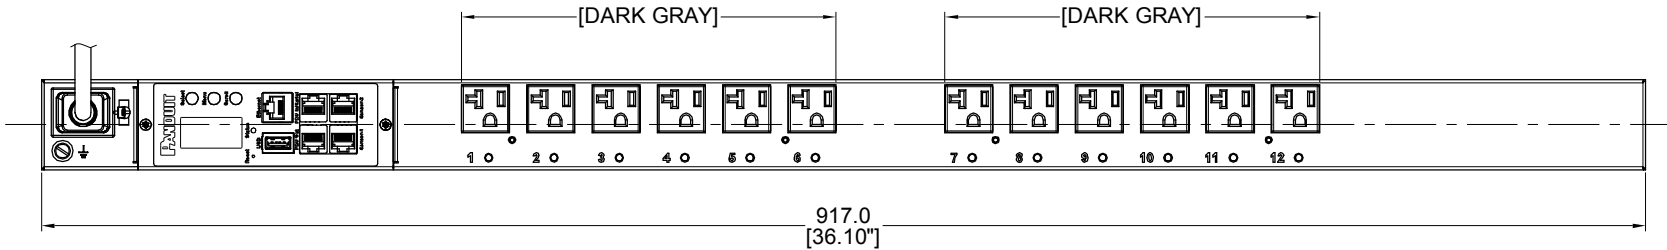

FRONT VIEW

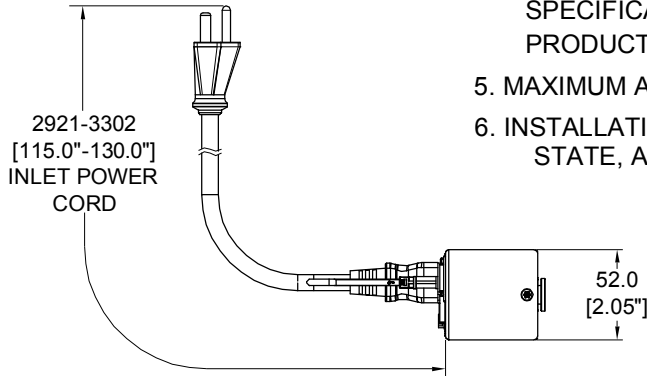


SIDE VIEW


PANDUIT P/N	WEIGHT
P12E21M	5.6kg

NOTES:

- IDENTIFICATION:
UNIT TYPE: MONITORED SWITCHED
ORIENTATION: VERTICAL, HALF
OUTLET QTY&TYPE: (12) 5-20R
BREAKER QTY&TYPE: N/A
INPUT VOLTAGE: 100-120VAC
INPUT CURRENT: 20A (16A DERATED)
INPUT PHASE: SINGLE-PHASE
RATED POWER: 1.9kVA
INPUT PLUG: NEMA 5-20P
INPUT CORD LENGTH: 3m [10']
- ACCESSORIES:
POCKET GUIDE
QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
QTY: (4) M6 CAGED NUT
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 1.9kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

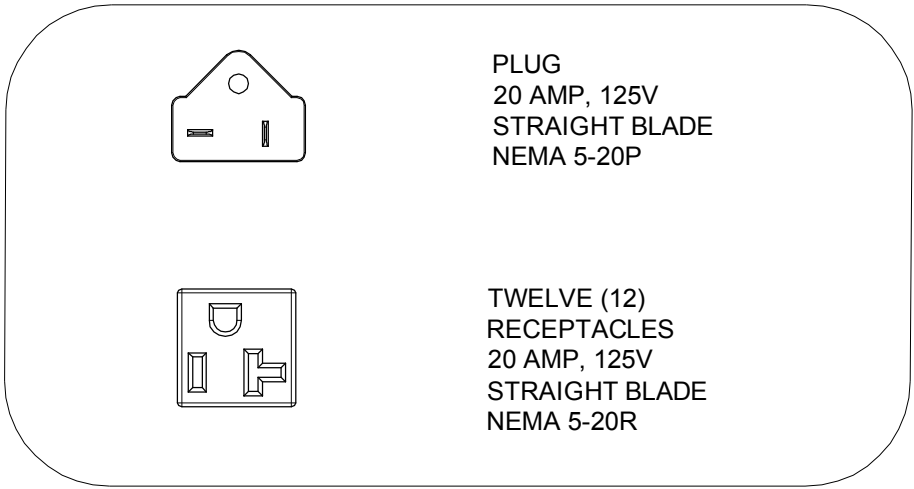

01A	09/22/2017	WSJ	MIM	EDM	INITIAL RELEASE	P12E21M	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE		INTELLIGENT SERIES PDU P12E21M CUSTOMER DRAWING	
ITEM REVISION NAME			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
 THIRD ANGLE PROJECTION Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P12E21M_DC	
DRAWN BY	DATE	CHK	SCALE
WSJ	09/22/2017	SEAN	NONE
		SHT 1 OF 1	
		SCALE B	