

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

|              |             |
|--------------|-------------|
| PANDUIT P/N  | WEIGHT      |
| P24G03M-XXYZ | SEE SHEET 2 |

- SPECIFICATION:**
1. STANDARD:

UNIT TYPE:

ORIENTATION:

OUTLET QTY&TYPE:

INPUT VOLTAGE:

INPUT CURRENT:

BREAKER QTY&TYPE:

INPUT PHASE:

RATED POWER:

INPUT PLUG:

INPUT POWER CORD:

REGULATORY STANDARD:

MONITORED & SWITCHED PER OUTLET

VERTICAL, 0U FULL

(18) C13, (6) C19

100-120/200-240VAC

30A (24A DERATED)

(3) 20AMP, DOUBLE-POLE

THREE-PHASE WYE

8.6kVA

NEMA L21-30P

SEE SHEET 2 FOR PART NUMBER TABLE

RoHS COMPLIANT

2. ADDITIONAL:  
NONE
3. ACCESSORIES:  
(1) QUICK-START GUIDE

- NOTES:**
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [ INCHES ]

2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES


3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART

4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL

5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

6. OUTLETS ARE WIRED LINE TO LINE (208V)

**IDENTIFICATION**  
FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24G03M-XX Y Z




BOTTOM VIEW


|                                  |
|----------------------------------|
| XX: FINISHED GOOD COLOR          |
| BL=BLACK<br>RD=RED<br>WH=WHITE   |
| YL=YELLOW<br>BU=BLUE<br>GN=GREEN |

|                                   |
|-----------------------------------|
| Y: INPUT FEED TYPE                |
| 1=TOP-END FED<br>2=BOTTOM-END FED |

|                                     |
|-------------------------------------|
| Z: INPUT CORD LENGTH                |
| A=1 METER<br>B=2 METER<br>C=3 METER |

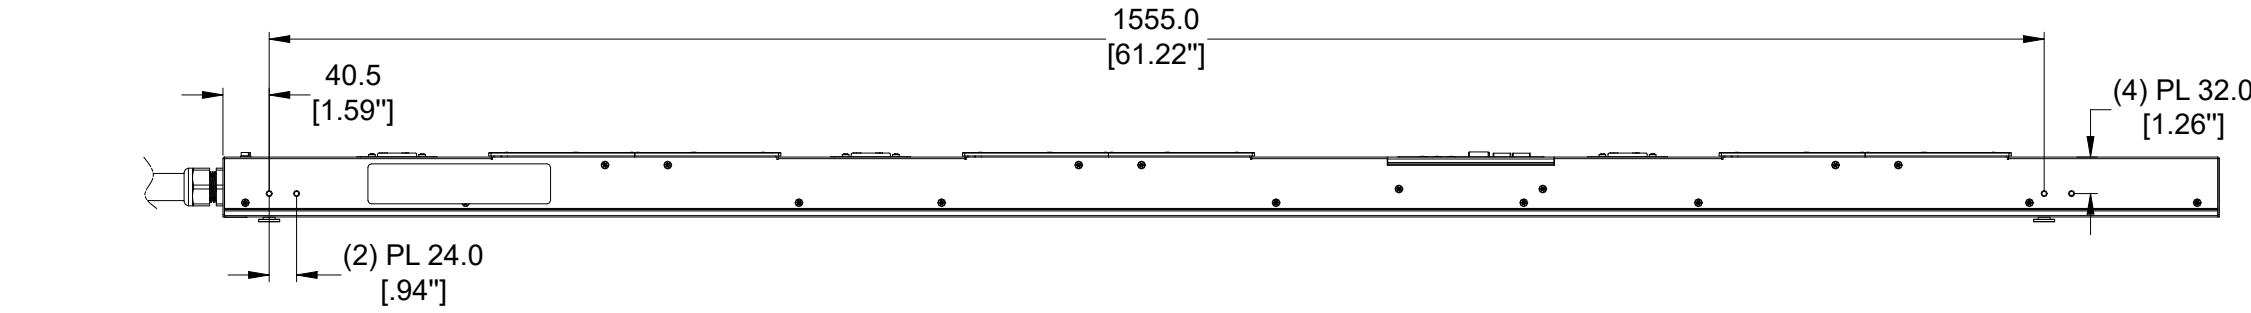


LEFT VIEW

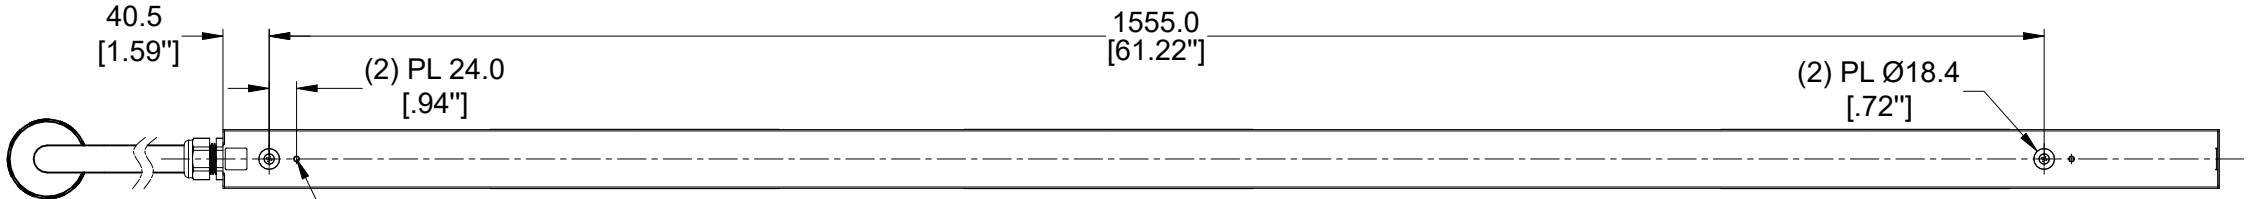


REAR VIEW

TOOLESS MOUNTING  
BUTTON LOCATIONS (12) PL

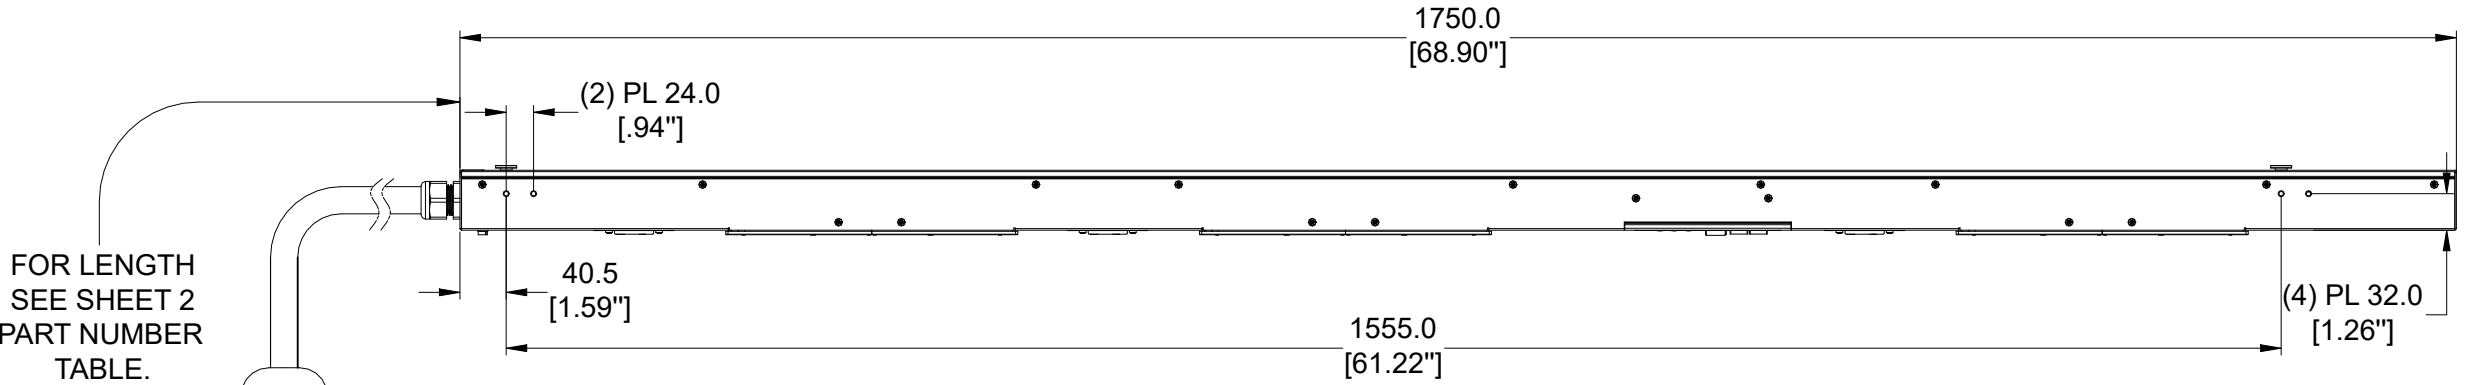

RIGHT VIEW

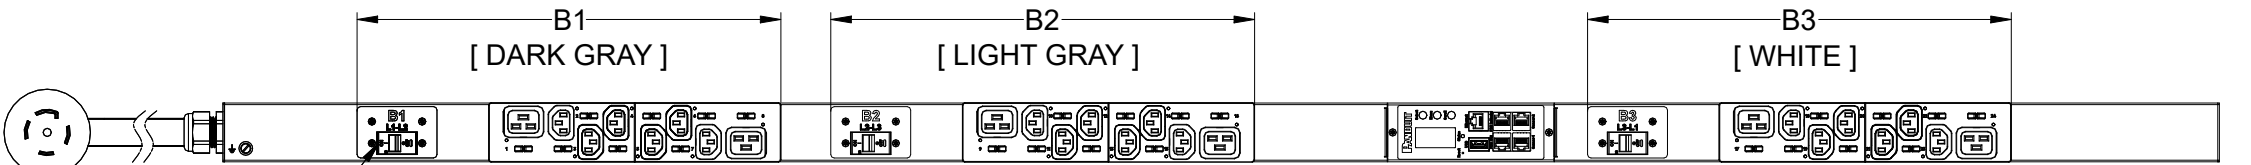

FRONT VIEW

20 AMP, DOUBLE - POLE  
ELECTRO MECHANICAL  
SWITCH / BREAKER (3) PLACES


PLUG/RECEPTACLE BLOCK



PLUG  
NEMA L21-30P, 4P 5W  
30A, 120/208V MAX RATED INPUT  
24A DERATED



RECEPTACLES  
IEC 60320/C19  
16A, 250V MAX RATED OUTPUT



RECEPTACLES  
IEC 60320/C13  
10A, 250V MAX RATED OUTPUT

|     |            |        |     |      |                                                                                                                                       |         |
|-----|------------|--------|-----|------|---------------------------------------------------------------------------------------------------------------------------------------|---------|
|     |            |        |     |      |                                                                                                                                       |         |
|     |            |        |     |      |                                                                                                                                       |         |
|     |            |        |     |      |                                                                                                                                       |         |
| 03B | 04/12/2022 | LWB    | MIM | JAWI | ADDED*OUTLETS ARE WIRED LINE TO LINE (208V)*IN NOTE 6                                                                                 | P24G03M |
| 03A | 06/17/2020 | LWB    | MIM | JAWI | UPDATED THE OUTLET DESIGN                                                                                                             | P24G03M |
| 02A | 06/07/2018 | H.XU   | MIM | JAWI | ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION<br>UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER' | P24G03M |
| 01A | 08/23/2017 | GEORGE | MIM | EDM  | INITIAL RELEASE                                                                                                                       | P24G03M |
| REV | DATE       | BY     | CHK | APR  | DESCRIPTION                                                                                                                           | ECN     |

|                                                                                                                                                                                                            |                    |                               |               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------------------------|---------------|
| WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY |                    | SIGN<br>DATE<br>PRINT         |               |
| TITLE<br>INTELLIGENT SERIES PDU<br>P24G03M-XXYZ<br>CUSTOMER DRAWING                                                                                                                                        |                    |                               |               |
| ITEM REVISION NAME:                                                                                                                                                                                        |                    |                               |               |
| DATASHEET FILE NAME:                                                                                                                                                                                       |                    |                               |               |
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONAL TOLERANCE ARE: mm [IN]                                                                                                                                           |                    | MATERIAL/COLOR:<br>N/A        |               |
| THIRD ANGLE PROJECTION                                                                                                                                                                                     |                    | DRAWING NUMBER:<br>P24G03M_DC |               |
| DRAWN BY<br>GEORGE                                                                                                                                                                                         | DATE<br>08/23/2017 | CHK<br>SEAN                   | SCALE<br>NONE |
| SHT 1 OF 2                                                                                                                                                                                                 |                    | SCALE<br>B                    |               |

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| FINISHED GOOD PART NUMBER | FINISHED GOOD DESCRIPTION                                                                                                             | COLOR             | INPUT CORD LENGTH                  | WEIGHT |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------------|--------|
| P24G03M                   | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK     | BLACK (RAL 9005)  | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-BL1A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK     | BLACK (RAL 9005)  | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-BL1B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK     | BLACK (RAL 9005)  | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-RD1A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED       | RED (RAL 3020)    | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-RD1B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED       | RED (RAL 3020)    | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-RD1C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED       | RED (RAL 3020)    | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-WH1A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE     | WHITE (RAL 9003)  | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-WH1B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE     | WHITE (RAL 9003)  | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-WH1C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE     | WHITE (RAL 9003)  | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-YL1A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW    | YELLOW (RAL 1023) | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-YL1B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW    | YELLOW (RAL 1023) | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-YL1C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW    | YELLOW (RAL 1023) | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-BU1A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE      | BLUE (RAL 5005)   | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-BU1B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE      | BLUE (RAL 5005)   | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-BU1C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE      | BLUE (RAL 5005)   | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-GN1A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN     | GREEN (RAL 6001)  | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-GN1B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN     | GREEN (RAL 6001)  | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-GN1C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN     | GREEN (RAL 6001)  | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-BL2A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK  | BLACK (RAL 9005)  | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-BL2B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK  | BLACK (RAL 9005)  | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-BL2C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK  | BLACK (RAL 9005)  | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-RD2A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED    | RED (RAL 3020)    | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-RD2B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, RED    | RED (RAL 3020)    | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-RD2C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED    | RED (RAL 3020)    | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-WH2A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE  | WHITE (RAL 9003)  | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-WH2B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE  | WHITE (RAL 9003)  | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-WH2C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE  | WHITE (RAL 9003)  | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-YL2A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-YL2B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-YL2C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-BU2A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE   | BLUE (RAL 5005)   | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-BU2B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE   | BLUE (RAL 5005)   | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-BU2C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE   | BLUE (RAL 5005)   | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |
| P24G03M-GN2A              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN  | GREEN (RAL 6001)  | 1M(+178MM-89MM) 3.3' [+3.5"-1.75"] | 8.2kg  |
| P24G03M-GN2B              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN  | GREEN (RAL 6001)  | 2M(+178MM-89MM) 6.5' [+7"-3.5"]    | 8.8kg  |
| P24G03M-GN2C              | VERTICAL,(18) C13,(6)C19,MONITORED SWITCHED PER OUTLET, 100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN  | GREEN (RAL 6001)  | 3M(+254MM-127MM) 10' [+10"-5"]     | 9.4kg  |

B



A

B



A

|     |            |        |     |      |                                                                                                                                       |         |
|-----|------------|--------|-----|------|---------------------------------------------------------------------------------------------------------------------------------------|---------|
|     |            |        |     |      |                                                                                                                                       |         |
|     |            |        |     |      |                                                                                                                                       |         |
|     |            |        |     |      |                                                                                                                                       |         |
|     |            |        |     |      |                                                                                                                                       |         |
| 03B | 04/12/2022 | LWB    | MIM | JAWI | ADDED*OUTLETS ARE WIRED LINE TO LINE (208V)*IN NOTE 6                                                                                 | P24G03M |
| 03A | 06/17/2020 | LWB    | MIM | JAWI | UPDATED THE OUTLET DESIGN                                                                                                             | P24G03M |
| 02A | 06/07/2018 | H.XU   | MIM | JAWI | ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION<br>UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER' | P24G03M |
| 01A | 08/23/2017 | GEORGE | MIM | EDM  | INITIAL RELEASE                                                                                                                       | P24G03M |
| REV | DATE       | BY     | CHK | APR  | DESCRIPTION                                                                                                                           | ECN     |

2



1

|                                                                                                                                                                                                               |                    |                               |               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------------------------|---------------|
| WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.<br>THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY |                    | SIGN<br><br>DATE<br><br>PRINT |               |
| TITLE<br><div>INTELLIGENT SERIES PDU<br/>P24G03M-XXYZ<br/>CUSTOMER DRAWING</div>                                                                                                                              |                    |                               |               |
| ITEM REVISION NAME:                                                                                                                                                                                           |                    |                               |               |
| DATASHEET FILE NAME:                                                                                                                                                                                          |                    |                               |               |
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONAL TOLERANCE ARE: mm [IN]                                                                                                                                              |                    | MATERIAL/COLOR:<br><br>N/A    |               |
| <br>THIRD ANGLE<br>PROJECTION                                                                                                                                                                                 |                    | DRAWING NUMBER:<br>P24G03M_DC |               |
| DRAWN BY<br>GEORGE                                                                                                                                                                                            | DATE<br>08/23/2017 | CHK<br>SEAN                   | SCALE<br>NONE |
| SHT 2 OF 2                                                                                                                                                                                                    |                    |                               | SCALE<br>B    |