
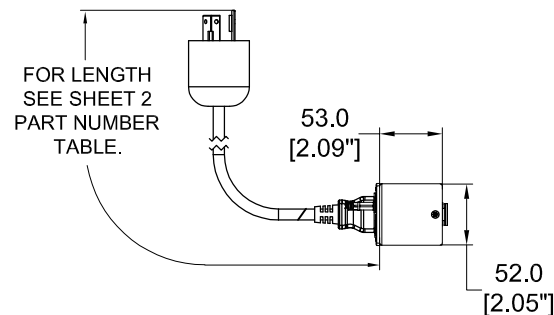
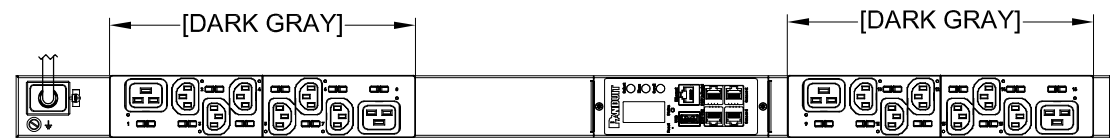
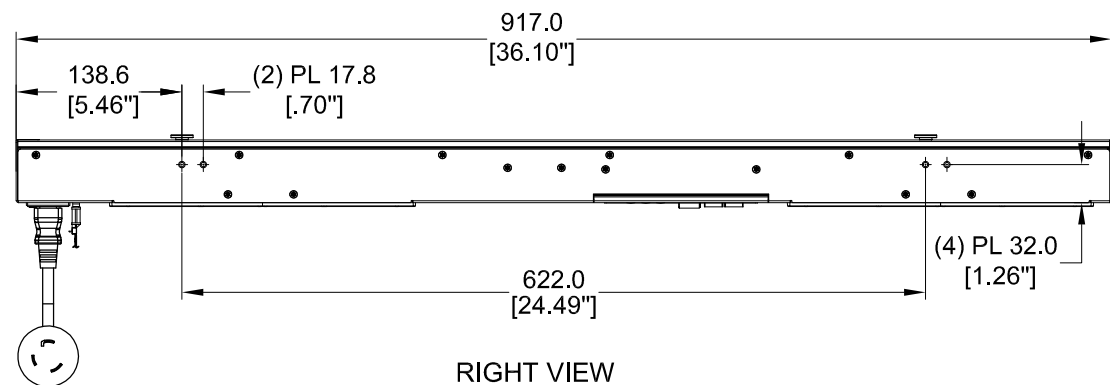


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

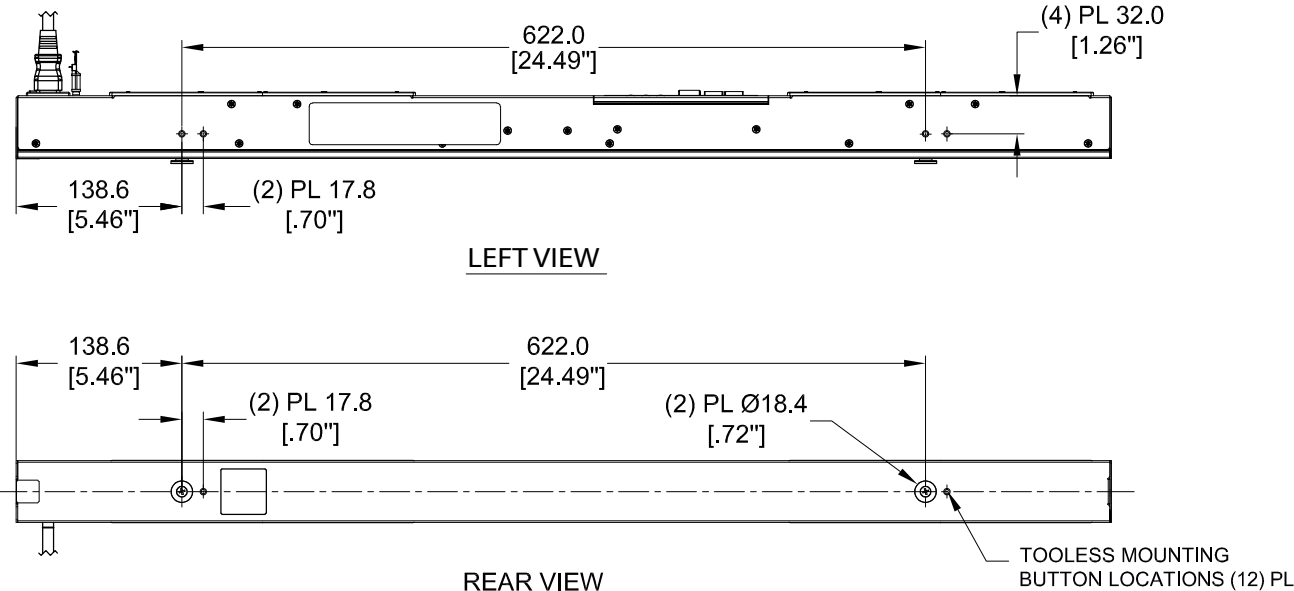

SPECIFICATION:

1. STANDARD:

UNIT TYPE:	MONITORED SWITCHED
ORIENTATION:	VERTICAL, HALF
OUTLET QTY&TYPE:	(12) C13, (4) C19
INPUT VOLTAGE:	100-240VAC
INPUT CURRENT:	20A (16A DERATED)
BREAKER QTY&TYPE:	N/A
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	3.3kVA
INPUT PLUG:	NEMA L6-20P
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:

NONE

3. ACCESSORIES:

(1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP FRONT FED" CONFIGURATION
6. SUPPLIED DETACHABLE INPUT CORD DESIGNED TO FEED INTO THE C20 INLET ON THE UNIT
7. DETACHABLE INPUT CORD MINIMUM RATING TO BE EQUAL TO OR GREATER THAN THE PDU INPUT CURRENT RATING STATED IN SPECIFICATION #1 ABOVE

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P16E24M-XX Y Z

XX: FINISHED GOOD COLOR BL =BLACK RD =RED WH =WHITE YL =YELLOW BU =BLUE GN =GREEN	Y: INPUT FEED TYPE 3 =TOP-FRONT FED 5 =BOTTOM-FRONT FED	Z: INPUT CORD LENGTH A =1 METER B =2 METER C =3 METER
---	---	--

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL, PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE
INTELLIGENT SERIES PDU
P16E24M-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

THIRD ANGLE
PROJECTION

MATERIAL/COLOR:

N/A

DRAWING NUMBER:

P16E24M_DC

DRAWN BY
GEORGE

DATE
07/27/2017

CHK
SEAN

SCALE
NONE

SHT 1 OF 2

SCALE
B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P16E24M
01A	07/27/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P16E24M

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P16E24M	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-BL3A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-BL3B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-RD3A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-RD3B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-RD3C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-WH3A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-WH3B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-WH3C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-YL3A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-YL3B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-YL3C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-BU3A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-BU3B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-BU3C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-GN3A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-GN3B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-GN3C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , TOP-FRONT FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-BL5A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-BL5B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-BL5C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-RD5A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-RD5B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-RD5C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-WH5A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-WH5B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-WH5C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-YL5A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-YL5B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-YL5C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-BU5A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-BU5B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-BU5C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg
P16E24M-GN5A	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3'[*+3.5"/-1.75"]	1.8kg
P16E24M-GN5B	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5'[*+7"/-3.5"]	2.0kg
P16E24M-GN5C	VERTICAL,(12) C13,(4) C19,MONITORED SWITCHED, 100-240V/20A/1 PHASE , BOTTOM-FRONT FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10'[*+10"/-5"]	2.2kg

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN

DATE

PRINT

TITLE

INTELLIGENT SERIES PDU
P16E24M-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

MATERIAL/COLOR:

N/A

DRAWING NUMBER:

P16E24M_DC

DRAWN BY

DATE

GEORGE

07/27/2017

CHK

SEAN

SCALE

NONE

SHT 2 OF 2

SCALE

B

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P16E24M
01A	07/27/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P16E24M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN