


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

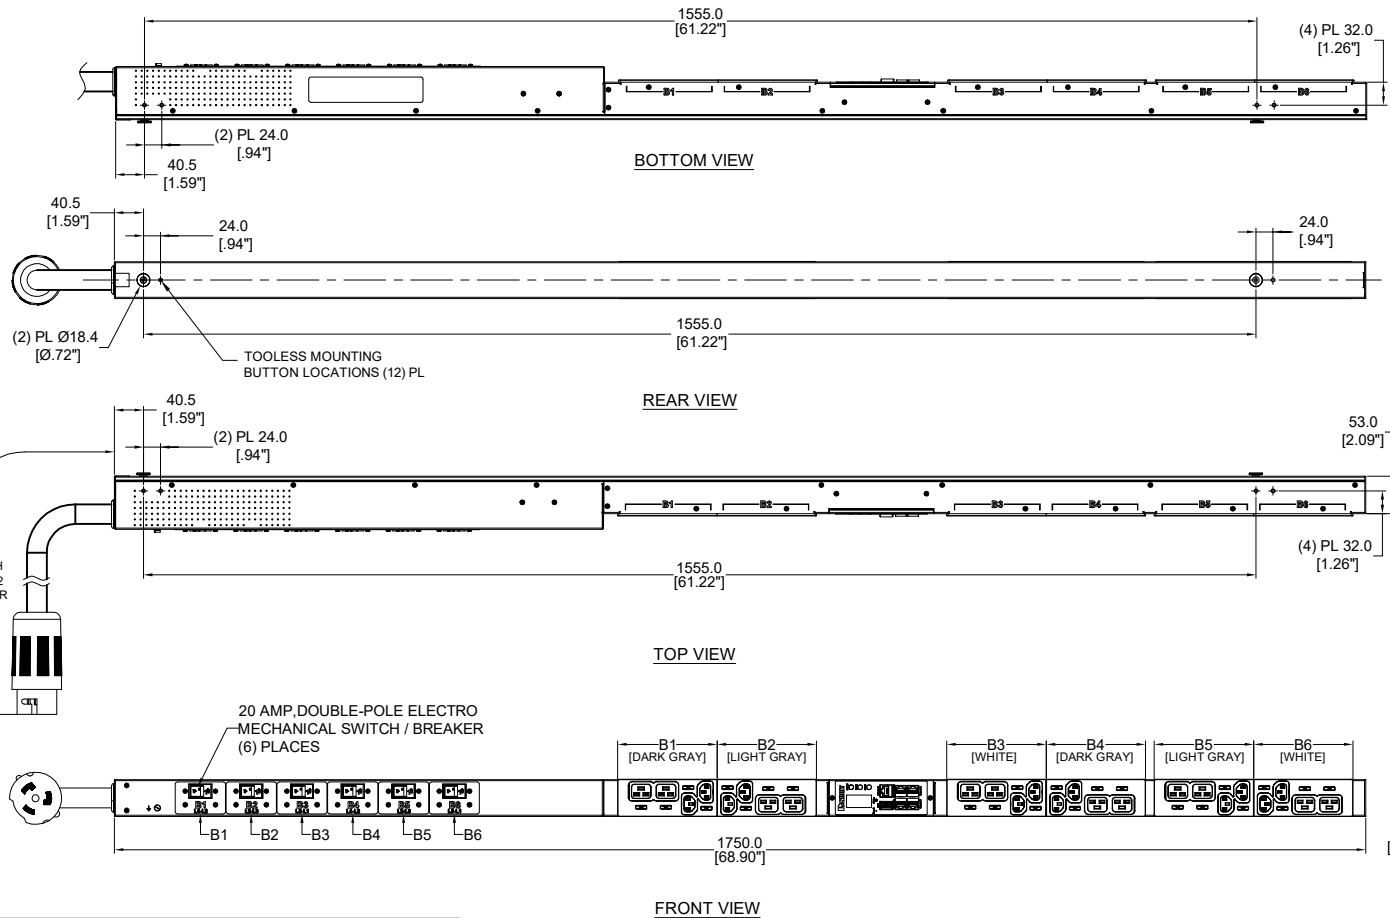

PANDUIT P/N	WEIGHT
P24D31M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD:	
UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, 0U, FULL
OUTLET QTY&TYPE:	(12) C13, (12) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	50A (40A DERATED)
BREAKER QTY&TYPE:	(6) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE, DELTA
RATED POWER:	14.4 kVA
INPUT PLUG:	CS8365
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:

NONE

3. ACCESSORIES:


(1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES].
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL.
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION.

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24D31M-XX Y Z

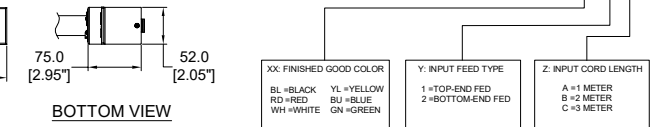

PLUG/RECEPTACLE BLOCK



PLUG
CS8365, 3P 4W
50A, 250V, 3-PHASE MAX RATED INPUT
40A DERATED



RECEPTACLE
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLE
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	03/26/2020	Leo	MIM	JAW	1. INPUT PLUG CS8365 WAS SHOWN CS8265	P24D31M
02A	06/07/2018	H.XU	MIM	JAW	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24D31M
01A	10/10/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24D31M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P24D31M-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME		PANDUIT
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P24D31M_DC
DRAWN BY 10/10/2017	CHK SEAN	SCALE NONE
SHT 1 OF 2		SCALE B



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24D31M	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-BL1A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-BL1B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-RD1A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-RD1B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-RD1C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-WH1A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-WH1B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-WH1C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-YL1A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-YL1B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-YL1C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-BU1A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-BU1B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-BU1C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-GN1A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-GN1B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-GN1C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-BL2A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-BL2B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-BL2C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-RD2A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-RD2B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-RD2C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-WH2A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-WH2B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-WH2C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-YL2A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-YL2B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-YL2C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-BU2A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-BU2B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-BU2C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg
P24D31M-GN2A	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3'[*3.5"/-1.75"]	11.1kg
P24D31M-GN2B	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5'[*7"/-3.5"]	12.4kg
P24D31M-GN2C	VERTICAL,(12) C13,(12) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10'[*10"/-5"]	13.7kg

B

B

A

A

03A	03/26/2020	Leo	MIM	JAW	1. INPUT PLUG CS8365 WAS SHOWN CS8265	P24D31M
02A	06/07/2018	H.XU	MIM	JAW	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24D31M
01A	10/10/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24D31M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN DATE PRINT
TITLE INTELLIGENT SERIES PDU P24D31M-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 94<50 40.5 504<250 41.0 2504<500 41.5 5004<1000 42.5 10004<2000 44.0		
DRAWN BY DATE 10/10/2017		CHK SEAN
SCALE NONE		SCALE B
SHT 2 OF 2		

