


B

A




B


A

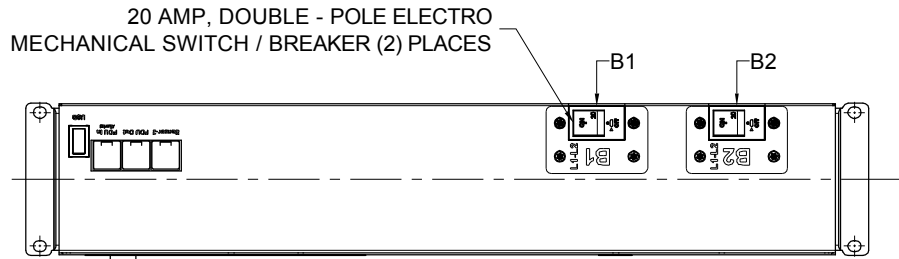


REAR VIEW

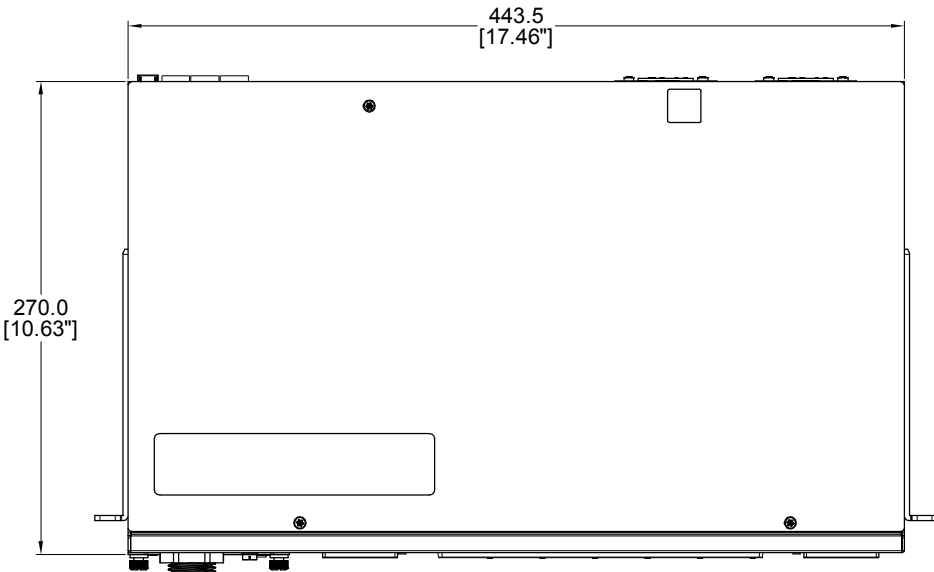

TOP VIEW

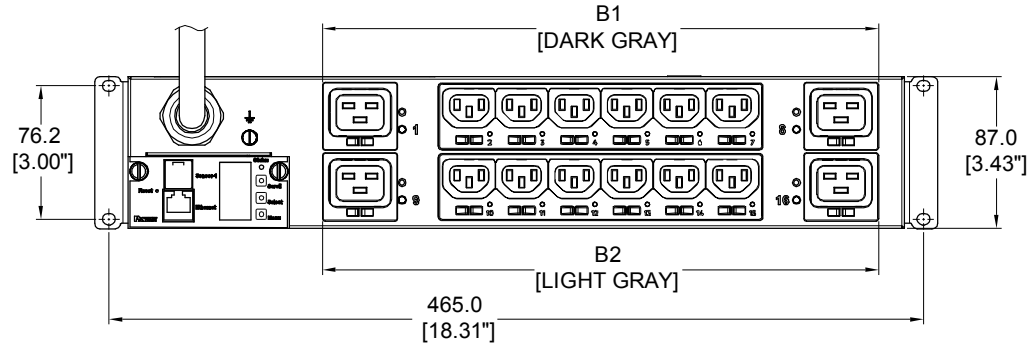


FRONT VIEW



PLUG
30 AMP, 250V
TWIST-LOCK
NEMA L6-30P



FOUR (4)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19



TWELVE (12)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

2




1

PANDUIT P/N	WEIGHT
P16E19M	9.0kg

NOTES:

1. IDENTIFICATION:
- UNIT TYPE:
ORIENTATION:
OUTLET QTY&TYPE:
BREAKER QTY&TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT CORD LENGTH:

MONITORED SWITCHED
HORIZONTAL, 2U
(12) C13, (4) C19
(2) 20AMP, DOUBLE-POLE
200-240VAC
30A (24A DERETED)
SINGLE-PHASE
5.0kVA
NEMA L6-30P
3m [10']
2. ACCESSORIES:
POCKET GUIDE
QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
QTY: (4) M6 CAGED NUT
3. RoHS COMPLIANT
4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR
FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE
SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF
PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 5.0kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL,
STATE, AND LOCAL CODES

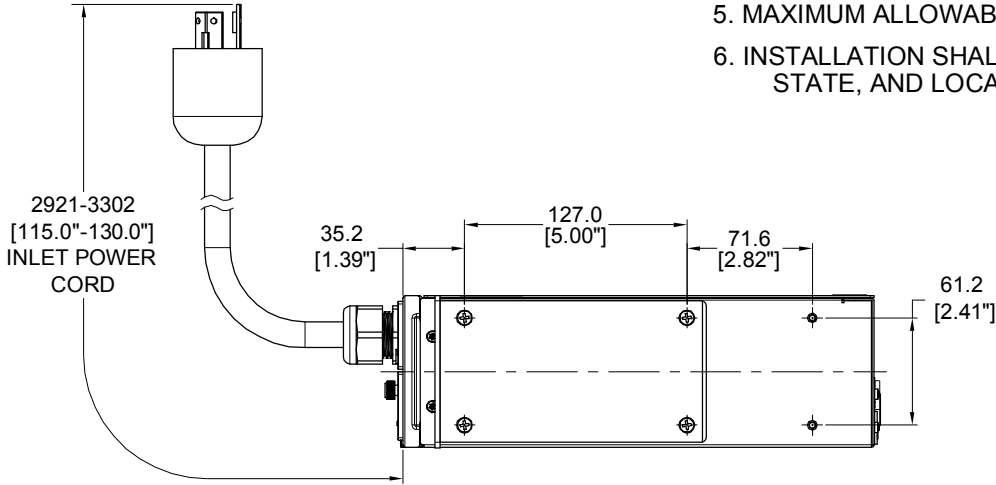

SIDE VIEW

01A	09/25/2017	WSJ	MIM	EDM	INITIAL RELEASE	P16E19M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE
DIMENSIONS, NOTES, AND SIGN THE CLIENT
SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT
SIGNED APPROVAL. PLEASE DO NOT DELAY
IN RETURNING PROOF AS IT WILL AFFECT
DELIVERY

SIGN
DATE
PRINT

TITLE

INTELLIGENT SERIES PDU
P16E19M
CUSTOMER DRAWING

ITEM REVISION NAME


DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)

0<450 ±0.5
50<250 ±1.0
250<500 ±1.5
500<1000 ±2.5
1000<2000 ±4.0

THIRD ANGLE
PROJECTION



MATERIAL/COLOR:

N/A

DRAWING NUMBER:

P16E19M_DC

DRAWN BY DATE

WSJ 09/25/2017

CHK

SEAN

SCALE

NONE

SHT 1 OF 1

SCALE
B

1